



STAINLESS
FRAME



INTEGRATED
FRAME



INTEGRATED
SOLID

FEATURES & BENEFITS


PERFORMANCE	• Volume of 3.0 cu ft holds up to 48 bottles (12 oz) or 60 cans (12 oz) and 8 wine bottles (750 ml) • Digital Touch Pad Control is conveniently located on upper face of unit • Temperature range: 34°F - 45°F • Passive cooling system
INTERIOR/EXTERIOR	• Black interior is illuminated with LED lighting that automatically turns off when the door is closed, or can be set to stay on for 3 hours • Three-quarter extension black coated wine racks allow for easy access • Wine racks accommodate a variety of bottle shapes and sizes • Two adjustable tempered glass shelves • LowE coated, argon gas filled, dual thermopane glass door provides protection from harmful UV Light • Stainless steel handle (7/8" diameter) • Door swing is field reversible, and is shipped right-hand hinged
INTEGRATION	• Unit is designed to be built-in or can be freestanding • Integrated model requires 3/4" custom door panel (panels not supplied by U-Line) • Four independently adjustable leveling legs provide a precise undercounter fit • Available in the following finishes: Stainless or Integrated

MODEL DETAILS


Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-1215BEVS-00A	115 / 60	Field Reversible	Stainless Frame	96 lb
U-1215BEVINT-00A	115 / 60	Field Reversible	Integrated Frame	93 lb
U-1215BEVINT-60A	115 / 60	Field Reversible	Integrated Solid	89 lb

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

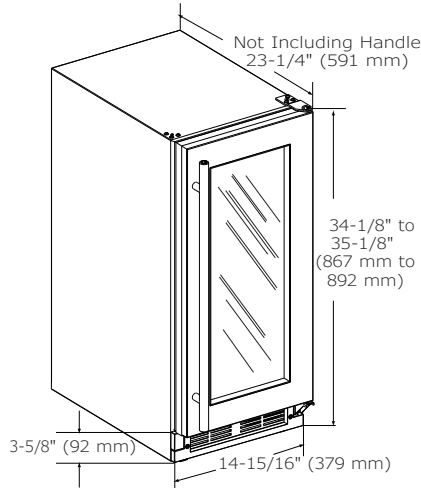

CABINET CUT-OUT

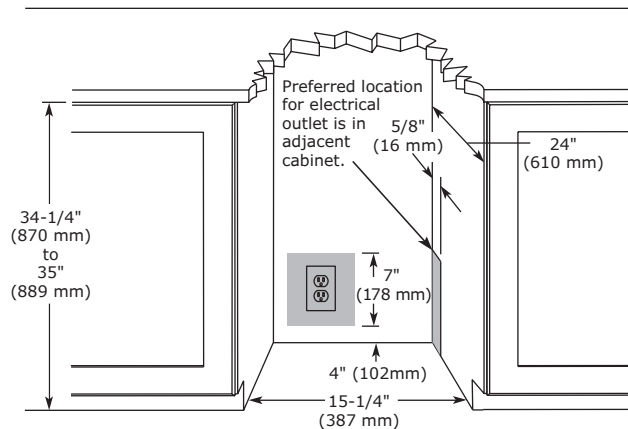

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening

Cutout includes the additional 1/4" width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + **Additional 1 Year (parts & labor) warranty at no cost with product registration**

See complete warranty for details

SPECIFICATIONS

Model	1215BEV
Amps: Running	1.2
Capacity: Bottle (12 oz)	48
Capacity: Can (12 oz)	60
Capacity: Volume (cu ft)	3.0
Capacity: Wine Bottle (750 ml)	8
Control Type	Digital Touch Pad
Dimensions: Product Depth	23 1/4" / 591 mm
Dimensions: Product Height	34 1/8" / 867 mm
Dimensions: Product Width	14 15/16" / 379 mm
Energy Consumption: Avg. Per Year	285
ENERGY STAR	No
Panel Height	30 1/4" / 768 mm
Panel Thickness	3/4" / 20 mm
Panel Type	2 3/4" / 70 mm Frame Panel or Solid Panel (-60 suffix)
Panel Width	14 3/4" / 375 mm
Product Weight: Max	89 lbs
Refrigerant Type	R600a
Sabbath (Star K Certified)	Yes
Temperature Range	34°F - 45°F

COOLING SYSTEM



ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.