

Job Name: _____

Purchaser: _____

Submitted To: _____

Construction: _____

Reference: _____

Approval: _____

Date: _____


Submitted By: _____

Unit: _____

Drawing #: _____



Outdoor Model:
1Q18TE2BEA

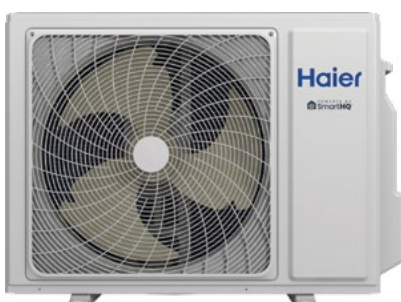

Indoor Model:
QS18WB2BEA



Outdoor Accessories

Front Wind Baffle	UAWB15WA
Side Wind Baffle	UASWB15WA
Back Wind Baffle	UAWB15WA
Top Cover	UATC20WA
Central Controller	UACT32A

Indoor Accessories

Wired Controller	QACT17B
Refrigerant Detection Sensor (RDS)	UALS01A
Remote Controller	WJ26X35393

Specifications

Operating Range	Cooling (Without Wind Baffle or Top Cover)	23~115°F (-5~46°C)
	Heating	-4~75°F (-20~24°C)
Power	Voltage, Cycle, Phase (V/Hz/-)	208-230/60/1
Cooling	Rated Capacity Btu/hr	17,000
	Capacity Range Btu/hr	6,000-17,500
	SEER2 / EER2	20/12
	Rated Power Input W	1,417
	Moisture Removal Pt./hr.	3.6
Heating	Rated Heating Capacity 47°F Btu/hr	19,000
	Heating Capacity Range Btu/hr	6,000-21,000
	COP 5°F	1.8
	Rated Heating Capacity 5°F Btu/hr	15,200
	HSPF2 (IV) / HSPF2 (V)	9.5/7.8
Outdoor Unit	Rated Power Input W	1,547
	Compressor	DC Inverter Rotary
	Maximum Fuse Size A	20
	Minimum Circuit Amp A	15
	Outdoor Noise Level dB	58
Indoor Unit	Dimension: HxWxD in (mm)	25 1/4 x 35 3/8 x 12 (642 x 898 x 306)
	Carton Dimension: HxWxD in (mm)	27 1/4 x 37 1/4 x 15 3/8 (691 x 945 x 392)
	Weight (Net/Ship) - lbs (kg)	90.47/103.26 (41/46.8)
	Basepan Heater	No
	Fan Speed Stages	5 + Auto
	Airflow CFM: Cooling (Turbo/High/Med/Low/Quiet)	570/520/480/420/330
	Indoor Motor Speed RPM: Cooling (Turbo/High/Med/Low/Quiet)	1250/1150/1050/950/800
	Indoor Sound Level dB: Cooling (Turbo/High/Med/Low/Quiet)	50/46/44/40/35
	Airflow CFM: Heating (Turbo/High/Med/Low/Quiet)	570/520/450/380/310
	Indoor Motor Speed RPM: Heating (Turbo/High/Med/Low/Quiet)	1250/1150/1025/900/750
	Indoor Sound Level dB: Heating (Turbo/High/Med/Low/Quiet)	48/46/41/38/33
	Dimension: H x W x D in (mm)	12 7/8 x 39 3/8 x 8 3/4 (327 x 999 x 223)
	Carton Dimension: H x W x D in (mm)	12 3/8 x 43 1/4 x 16 1/2 (313 x 1100 x 420)
	Weight (Net/Ship) - lbs (kg)	27.8/34.64 (12.6/15.7)
	Drain Pipe Size O.D in	5/8
Refrigerant Line	WiFi*	Built-in
	Factory-Installed Refrigerant Detection Sensor (RDS)	No
	Refrigerant Detection Sensor (RDS) Compatible	Yes
	Refrigerant	R454B
	Connections	Flare
	Liquid O.D. in	1/4
	Suction O.D. in	1/2
Refrigerant Line	Factory Charge Oz	45.9
	Maximum Line Length Ft / m	83/25
	Maximum Height Ft / m	50/15

*WiFi includes SmartHQ™ Home and SmartHQ™ Service compatibility.

1Q18TE2BEA / QS18WB2BEA

Heating Capacity Data

TC: Total Capacity PI: Power Input

Outdoor Air Temp DB	Indoor Temperature (°F, DB)																				
	60			64			68			70			72			75			79		
	TC (Btu/h)	PI (W)	COP	TC (Btu/h)	PI (W)	COP	TC (Btu/h)	PI (W)	COP	TC (Btu/h)	PI (W)	COP	TC (Btu/h)	PI (W)	COP	TC (Btu/h)	PI (W)	COP	TC (Btu/h)	PI (W)	COP
-4°F (-20°C)	12,890	2,175	1.74	12,118	2,220	1.60	11,753	2,265	1.52	11,400	2,311	1.45	11,057	2,358	1.37	10,725	2,407	1.31	10,083	2,456	1.20
0°F (-18°C)	15,914	2,306	2.02	14,961	2,353	1.86	14,512	2,401	1.77	14,075	2,450	1.68	13,652	2,500	1.60	13,242	2,551	1.52	12,449	2,603	1.40
5°F (-15°C)	17,186	2,329	2.16	16,157	2,377	1.99	15,671	2,426	1.89	15,200	2,475	1.80	14,743	2,526	1.71	14,300	2,577	1.63	13,443	2,630	1.50
14°F (-10°C)	18,217	2,339	2.28	17,126	2,387	2.10	16,611	2,435	2.00	16,112	2,485	1.90	15,627	2,536	1.81	15,158	2,587	1.72	14,250	2,640	1.58
23°F (-5°C)	19,310	2,348	2.41	18,154	2,396	2.22	17,608	2,445	2.11	17,079	2,495	2.01	16,565	2,546	1.91	16,067	2,598	1.81	15,105	2,651	1.67
32°F (0°C)	20,469	2,247	2.67	19,243	2,293	2.46	18,664	2,340	2.34	18,103	2,387	2.22	17,559	2,436	2.11	17,031	2,486	2.01	16,011	2,537	1.85
41°F (5°C)	21,697	2,043	3.11	20,398	2,084	2.87	19,784	2,127	2.73	19,189	2,170	2.59	18,612	2,215	2.46	18,053	2,260	2.34	16,972	2,306	2.16
47°F (8°C)	21,483	1,456	4.32	20,196	1,486	3.98	19,589	1,516	3.79	19,000	1,547	3.60	18,429	1,579	3.42	17,875	1,611	3.25	16,804	1,644	3.00
55°F (13°C)	22,127	1,463	4.43	20,802	1,493	4.08	20,176	1,524	3.88	19,569	1,555	3.69	18,981	1,587	3.51	18,410	1,619	3.33	17,308	1,652	3.07
65°F (18°C)	22,790	1,471	4.54	21,425	1,501	4.18	20,781	1,531	3.98	20,156	1,563	3.78	19,550	1,594	3.59	18,962	1,627	3.42	17,827	1,660	3.15
75°F (24°C)	23,473	1,478	4.65	22,067	1,508	4.29	21,404	1,539	4.08	20,760	1,570	3.87	20,136	1,602	3.68	19,530	1,635	3.50	18,361	1,669	3.23

Cooling Capacity Data


TC: Total Capacity PI: Power Input

Outdoor Air Temp DB	Indoor Temperature (°F, DB)																				
	64 / 53			68 / 57			72 / 61			77 / 64			80 / 67			82 / 70			86 / 72		
	TC (Btu/h)	PI (W)	EER2	TC (Btu/h)	PI (W)	EER2	TC (Btu/h)	PI (W)	EER2	TC (Btu/h)	PI (W)	EER2	TC (Btu/h)	PI (W)	EER2	TC (Btu/h)	PI (W)	EER2	TC (Btu/h)	PI (W)	EER2
23°F (-5°C)	15,873	1,143	13.89	16,561	1,101	15.03	17,278	1,060	16.30	18,026	1,020	17.67	18,806	982	19.15	19,620	947	20.73	20,470	913	22.43
32°F (0°C)	15,556	1,259	12.36	16,230	1,213	13.38	16,932	1,167	14.51	17,665	1,124	15.72	18,430	1,082	17.04	19,228	1,042	18.44	20,061	1,005	19.96
50°F (10°C)	15,245	1,373	11.10	15,905	1,323	12.02	16,594	1,273	13.04	17,312	1,225	14.13	18,062	1,180	15.31	18,844	1,137	16.58	19,660	1,096	17.94
68°F (20°C)	14,940	1,483	10.08	15,587	1,429	10.91	16,262	1,375	11.83	16,966	1,323	12.82	17,701	1,274	13.90	18,467	1,228	15.04	19,267	1,184	16.28
86°F (30°C)	14,642	1,586	9.23	15,276	1,528	10.00	15,937	1,470	10.84	16,627	1,415	11.75	17,347	1,362	12.73	18,098	1,313	13.78	18,881	1,266	14.92
95°F (35°C)	14,349	1,649	8.70	14,970	1,589	9.42	15,618	1,529	10.21	16,295	1,472	11.07	17,000	1,417	12.00	17,736	1,366	12.99	18,504	1,316	14.06
104°F (40°C)	14,062	1,715	8.20	14,671	1,653	8.88	15,306	1,590	9.62	15,969	1,531	10.43	16,660	1,474	11.30	17,381	1,420	12.24	18,134	1,369	13.24
110°F (43°C)	13,921	1,750	7.95	14,524	1,686	8.61	15,153	1,623	9.34	15,809	1,562	10.12	16,494	1,504	10.97	17,208	1,449	11.87	17,953	1,397	12.85
115°F (46°C)	13,782	1,803	7.64	14,379	1,738	8.28	15,001	1,672	8.97	15,651	1,609	9.72	16,329	1,549	10.54	17,036	1,493	11.41	17,773	1,439	12.35

Heating and cooling capacities and power usage are measured under the assumption of indoor humidity of 46%.


*Cooling capacities under low ambient temperatures below 23°F (-5°C) are tested when using wind baffle on outdoor unit.

1Q18TE2BEA

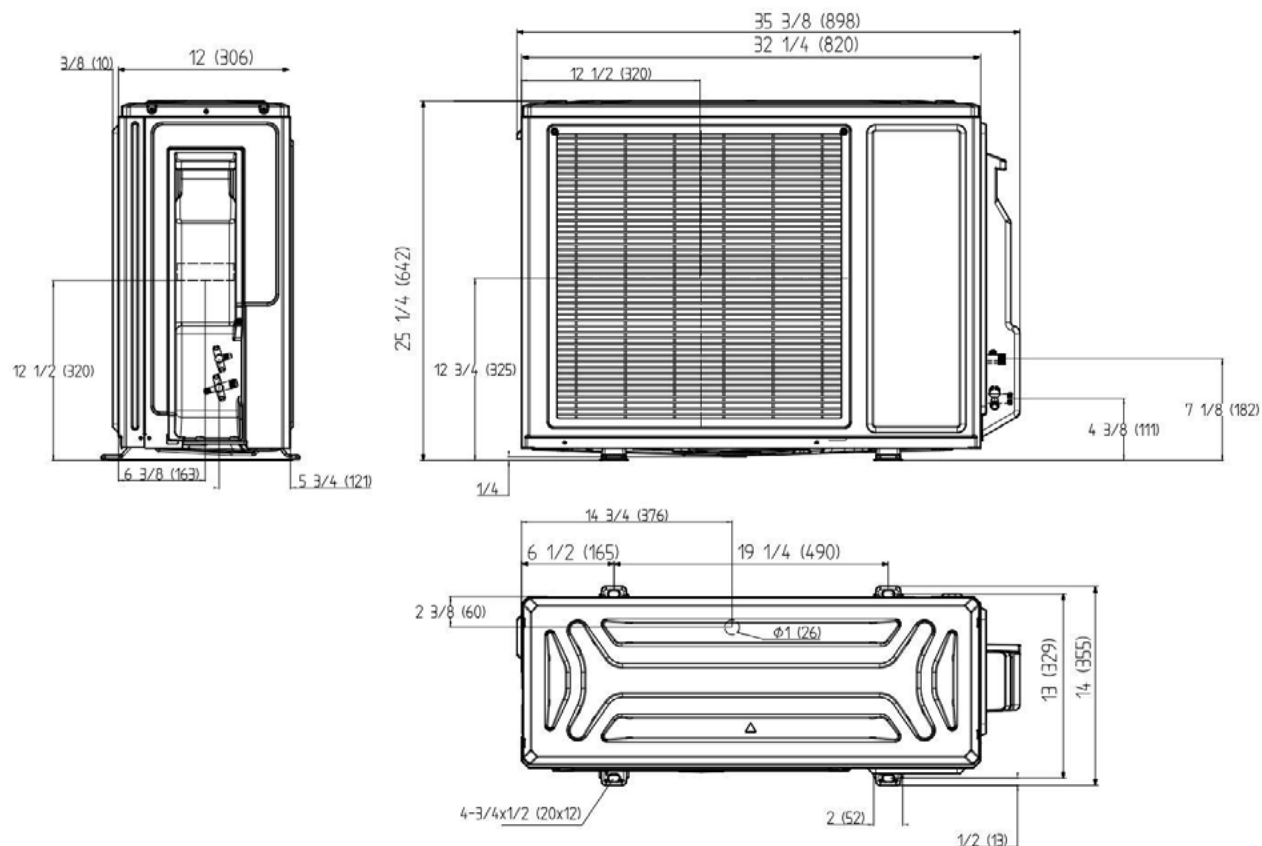

Note: Dimensions are shown in inches (millimeters)

QS18WB2BEA

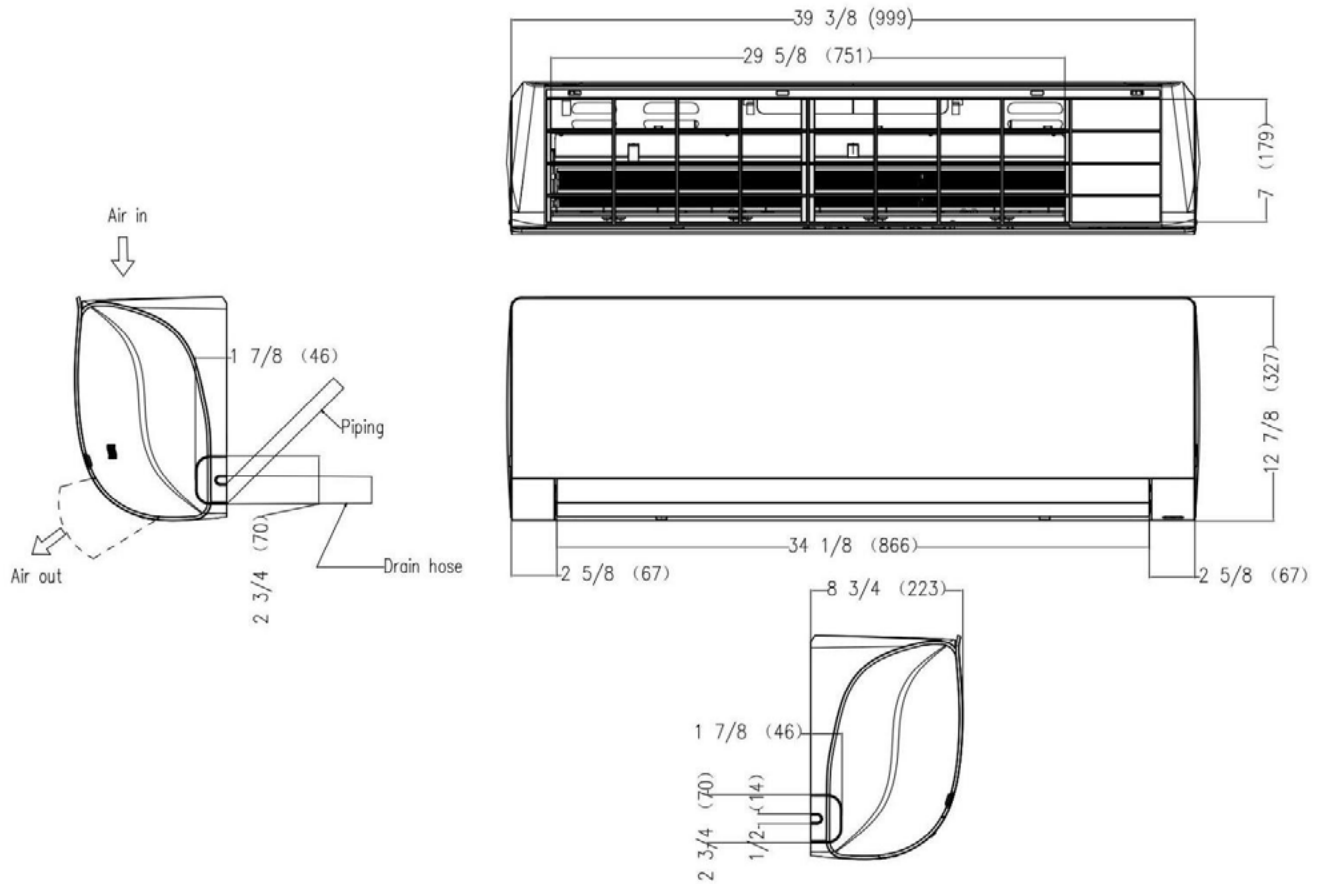

Note: Dimensions are shown in inches (millimeters)

SUBMITTAL REVISION HISTORY

03-21-25: Submittal release.