



STAINLESS  
SOLID



INTEGRATED  
SOLID



INTEGRATED  
SOLID (STAINLESS  
HANDLELESS  
PANEL)\*

FEATURES & BENEFITS

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PERFORMANCE       | <ul style="list-style-type: none"><li>• Volume of 4.5 cu ft</li><li>• Temperature range: -5°F to 5°F</li><li>• Convection cooling system rapidly and efficiently takes items to the set temperature</li><li>• U-Select® Control allows you to quickly set your model to our pre-programmed Polar mode</li><li>• U-Select® Control with digital OLED display</li></ul>                                                                                                                                                    |
| INTERIOR/EXTERIOR | <ul style="list-style-type: none"><li>• Black interior is illuminated with LED theater lighting that automatically turns off when the door is closed</li><li>• Three full-extension, durable vinyl coated freezer baskets are removable for easy cleaning</li><li>• Baskets can accommodate large pizza boxes and one-gallon containers with additional space for more storage</li><li>• Stainless steel handle (7/8" diameter)</li><li>• The door swing is field reversible, and is shipped right-hand hinged</li></ul> |
| INTEGRATION       | <ul style="list-style-type: none"><li>• Robust, concealed and covered hinges with built-in door stop and closer</li><li>• Adjustable grille can be shifted front-to-back and up-and-down</li><li>• Grille can accept an integrated toe-kick</li><li>• Integrated model requires 3/4" custom panel of your choice, or can accept U-Line Euro Style Handleless Stainless Panel Accessory (must be ordered separately)</li><li>• Four independently adjustable leveling legs</li></ul>                                      |

MODEL DETAILS

| Model            | Voltage/Hz | Door Swing       | Finish           | Shipping Weight |
|------------------|------------|------------------|------------------|-----------------|
| U-3024FZRS-00B   | 115 / 60   | Field Reversible | Stainless Solid  | 166 lb          |
| U-3024FZRINT-00B | 115 / 60   | Field Reversible | Integrated Solid | 158 lb          |

ACCESSORIES

| Model          | Description                      | Finish    | Shipping Weight |
|----------------|----------------------------------|-----------|-----------------|
| ULASHP24SOLID* | Stainless Handleless Panel Solid | Stainless | 12 lb           |


\*Installs on integrated models.

# 3024FZR


## Modular 3000 Series • 24" Freezer

### DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

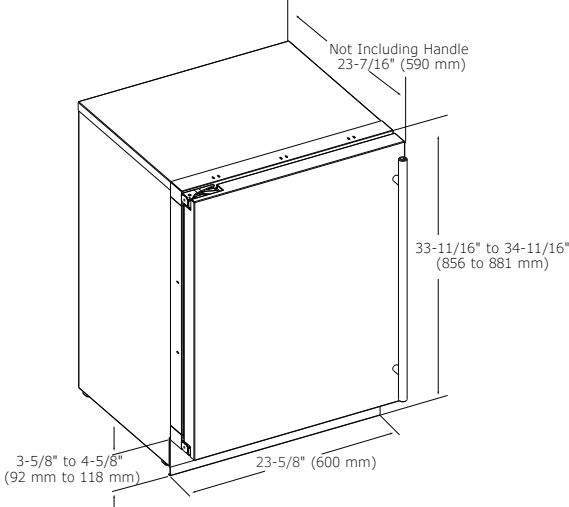

### CABINET CUT-OUT

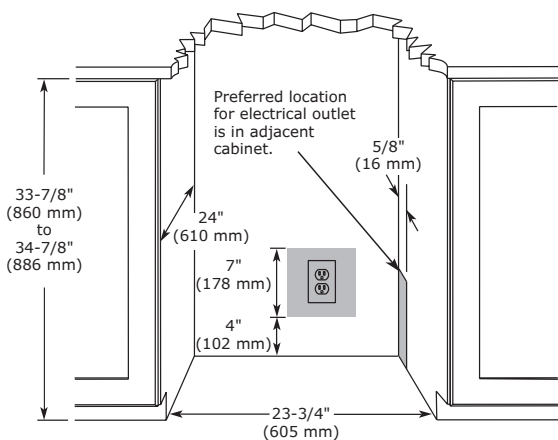

### INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.


No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

### SPECIFICATIONS

|                                   |                    |
|-----------------------------------|--------------------|
| Model                             | 3024FZR            |
| Amps: Running                     | 2.4                |
| Capacity: Volume (cu ft)          | 4.5                |
| Control Type                      | U-Select®          |
| Defrost Type                      | Frost Free         |
| Dimensions: Product Depth         | 24" / 610 mm       |
| Dimensions: Product Height        | 33 11/16" / 856 mm |
| Dimensions: Product Width         | 23 5/8" / 600 mm   |
| Energy Consumption: Avg. Per Year | 430 kWh            |
| ENERGY STAR                       | No                 |
| Panel Height                      | 30" / 762 mm       |
| Panel Thickness                   | 3/4" / 20 mm       |
| Panel Type                        | Solid Panel        |
| Panel Width                       | 23 1/2" / 595 mm   |
| Product Weight: Max               | 156 lb             |
| Refrigerant Type                  | R134a              |
| Sabbath (Star K Certified)        | Yes                |
| Temperature Range                 | -5°F to 5°F        |

### COOLING SYSTEM



### ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Please visit [u-line.com](http://u-line.com) to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.