

3045RDC • 45 cm Drinks Cabinets • Modular 3000 Series



INTEGRATED FRAME



INTEGRATED FRAME
(STAINLESS
HANDLELESS PANEL)*

FEATURES & BENEFITS

PERFORMANCE	• Volume of 96 litres holds up to 79 bottles (330 ml) or 123 cans (330 ml) • U-Select® Control with digital OLED display • Temperature range: 1°C - 21°C • Convection cooling system rapidly and efficiently takes items to the set temperature • U-Select® Control offers five distinct modes: Drinks: 1°C- 18°C, Deli: 1°C- 4°C, Fresh: 1°C- 4°C, Pantry: 1°C- 21°C, Root Cellar: 7°C - 12°C
INTERIOR/EXTERIOR	• Black interior is illuminated with LED theatre lighting that automatically turns off when the door is closed, or can be set to stay on for 3, 6, or 24 hours • Three adjustable tempered glass shelves with 11 height positions • Full-extension, slide-out crisper drawer is removable for easy cleaning • LowE coated, argon gas filled triple thermopane glass door provides protection from harmful UV light • The door swing is field reversible and is shipped right-hand hinged
INTEGRATION	• Robust, concealed and covered hinges with built-in door stop and closer • Adjustable grille/fascia can be shifted front-to-back and up-and-down • Grille/fascia can accept a custom integrated plinthe • Integrated model requires 20 mm custom door panel of your choice, or can accept U-Line Euro Style Handleless Panel Accessory (must be ordered seperately) • Four independently adjustable leveling legs

MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-3045RDCINT-00B	220-240 / 50	Field Reversible	Integrated Frame	53 kg

ACCESSORIES

Model	Description	Finish	Shipping Weight
ULASHP18FRAME*	Stainless Handleless Panel, 45 cm Frame	Stainless Frame	3 kg
U-POWERCORD-2056	Power Cord, 220-240v Great Britain/Ireland	Black	1 lb (0,5 kg)
U-POWERCORD-2667	Power Cord, 220-240v Continental Europe	Black	1 lb (0,5 kg)
U-POWERCORD-2256	Power Cord, 220-240v Australia/New Zealand	Black	1 lb (0,5 kg)
U-POWERCORD-3071	Power Cord, 220-240v China	Black	1 lb (0,5 kg)
U-POWERCORD-3111	Power Cord, 220-240v India	Black	1 lb (0,5 kg)


Power cord type must be specified with each U-Line order; no additional cost for power cord.

*Installs on integrated models.

Modular 3000 Series • 45 cm Drinks Cabinets • **3045RDC**

NICHE / RECESS

Dimensions shown apply to Integrated (INT) models with a 20 mm integrated panel/frame installed (applies to U-Line's Euro Style Handleless Panel Accessory).

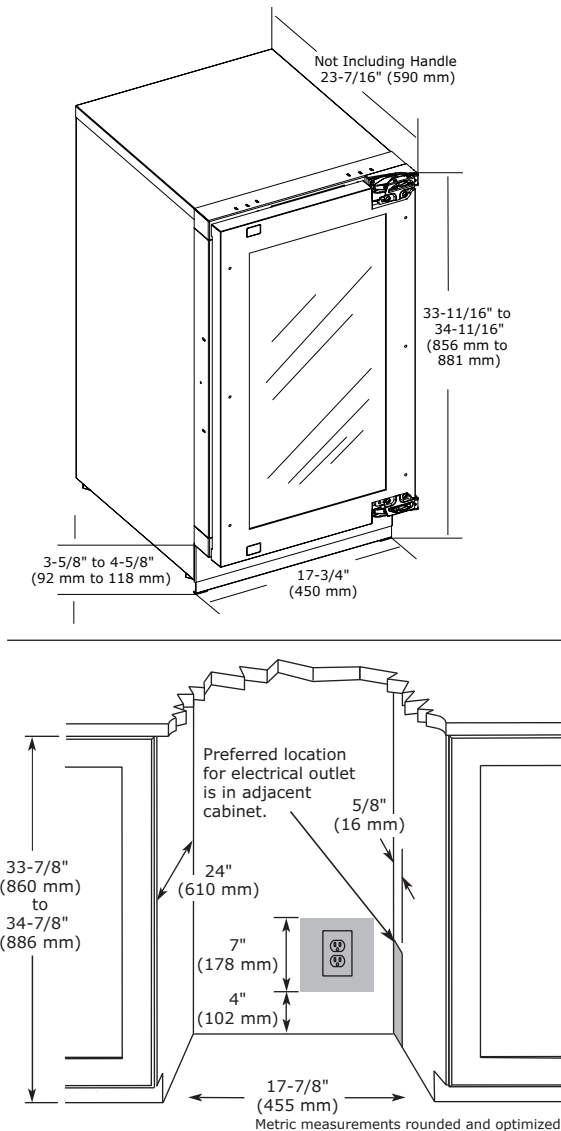

INSTALLATION NOTES

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille/fascia air flow.

For cabinet depths less than 620 mm, electrical socket must be located in the adjacent cabinet or recess in the wall. The power cord length is 180 cm.

*Must be installed in a climate controlled environment and operate within the temperatures designated in this product's User Guide.

Please visit u-line.com to view this model's User Guide. All specifications are subject to change without notice.

PRODUCT FICHE

Model	3045RDC
Category	3
Energy efficiency class on a scale of A+++ to G	A+
Energy consumption in kWh per year	115 kWh
Total volume: fridge compartment (net)	96 L
Total volume: wine compartment (net)	N/A
Total volume: freezer compartment (net)	N/A
Frost-free compartment	Yes
Temperature rise time in event of blackout (hrs)	N/A
Climate class	T or ST
Noise emissions	46 dBA
Dimensions: width	450 mm
Dimensions: depth	590 mm
Dimensions: height	856 mm
Net weight: solid door	N/A
Net weight: glass door	49 kg
Panel type	70 mm Frame Panel
Panel thickness	20 mm
Panel height	762 mm
Panel width	445 mm
Rated frequency	50 Hz
Rated voltage	220-240 v
Refrigerant charge	58 g
Foam blowing agent	HFO-1233zd

COOLING SYSTEM

