

3045WC • 45 cm Wine Cellar • Modular 3000 Series



INTEGRATED FRAME



INTEGRATED SOLID



INTEGRATED FRAME
(STAINLESS
HANDLELESS PANEL)*



INTEGRATED SOLID
(STAINLESS
HANDLELESS PANEL)*

FEATURES & BENEFITS

PERFORMANCE	- Volume of 96 litres holds up to 31 wine bottles (0,75 L) - U-Select® Control with digital OLED display - Temperature range: 3°C - 18°C - Convection cooling system rapidly and efficiently takes items to the set temperature - U-Select® Control offers three distinct modes: Sparkling Wine: 3°C - 10°C, White Wine: 7°C - 12°C, Red Wine: 12°C - 18°C - Rubber mounted compressor virtually eliminates vibration
	- Black interior is illuminated with LED theatre lighting that automatically turns off when the door is closed, or can be set to stay on for 3, 6, or 24 hours - Robust full-extension black coated wine racks allow for easy access and prevent bottles from shifting - Wine racks accommodate a variety of bottle shapes and sizes; the fourth and fifth racks allow for larger diameter wine and champagne bottles - LowE coated, argon gas filled triple thermopane glass door provides protection from harmful UV light - The door swing is field reversible and is shipped right-hand hinged
	- Robust, concealed and covered hinges with built-in door stop and closer - Adjustable grille/fascia can be shifted front-to-back and up-and-down - Grille/fascia can accept a custom integrated plinthe - Integrated model requires 20 mm custom door panel of your choice, or can accept U-Line Euro Style Handleless Panel Accessory (must be ordered separately) - Four independently adjustable leveling legs

MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-3045WCINT-00B	220-240 / 50	Field Reversible	Integrated Frame	60 kg
U-3045WCINT-60B	220-240 / 50	Field Reversible	Integrated Solid	58 kg

ACCESSORIES

Model	Description	Finish	Shipping Weight
ULASHP18FRAME*	Stainless Handleless Panel, 45 cm Frame	Stainless Frame	3 kg
ULASHP18SOLID*	Stainless Handleless Panel, 45 cm Solid	Stainless Solid	4 kg
U-POWERCORD-2056	Power Cord, 220-240v Great Britain/Ireland	Black	1 lb (0,5 kg)
U-POWERCORD-2667	Power Cord, 220-240v Continental Europe	Black	1 lb (0,5 kg)
U-POWERCORD-2256	Power Cord, 220-240v Australia/New Zealand	Black	1 lb (0,5 kg)
U-POWERCORD-3071	Power Cord, 220-240v China	Black	1 lb (0,5 kg)
U-POWERCORD-3111	Power Cord, 220-240v India	Black	1 lb (0,5 kg)



Power cord type must be specified with each U-Line order; no additional cost for power cord.

*Installs on integrated models.

Modular 3000 Series • 45 cm Wine Cellar • **3045WC**

NICHE / RECESS

Dimensions shown apply to Integrated (INT) models with a 20 mm integrated panel/frame installed (applies to U-Line's Euro Style Handleless Panel Accessory).

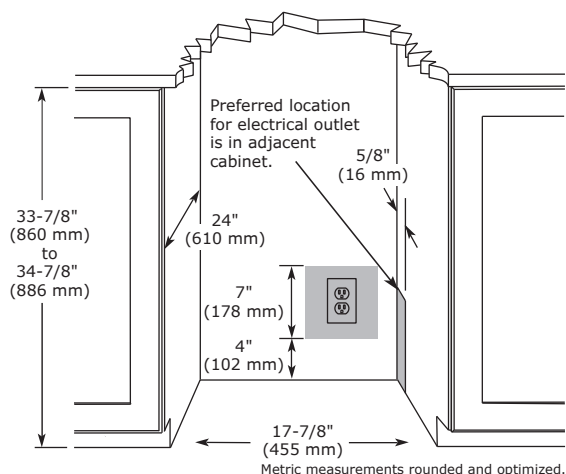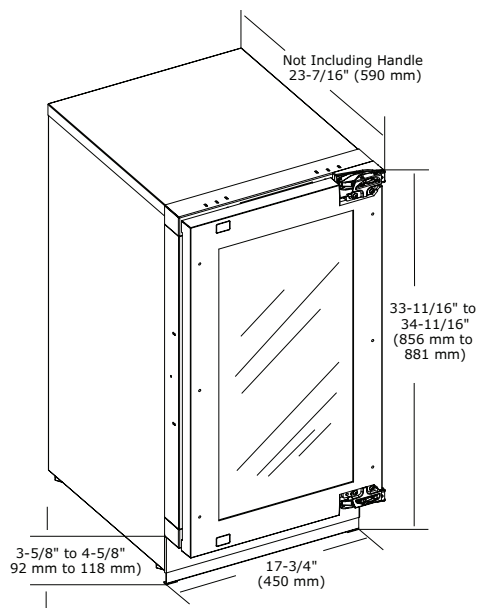

INSTALLATION NOTES

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille/fascia air flow.

For cabinet depths less than 620 mm, electrical socket must be located in the adjacent cabinet or recess in the wall. The power cord length is 180 cm.

*Must be installed in a climate controlled environment and operate within the temperatures designated in this product's User Guide.

This appliance is intended to be used exclusively for the storage of wine.

Please visit u-line.com to view this model's User Guide. All specifications are subject to change without notice.

PRODUCT FICHE

Model	3045WC
Category	2
Energy efficiency class on a scale of A+++ to G	A
Energy consumption in kWh per year	116 kWh
Total volume: fridge compartment (net)	N/A
Total volume: wine compartment (net)	96 L
Total volume: freezer compartment (net)	N/A
Frost-free compartment	Yes
Temperature rise time in event of blackout (hrs)	N/A
Climate class	T or ST
Noise emissions	46 dBA
Dimensions: width	450 mm
Dimensions: depth	590 mm
Dimensions: height	856 mm
Net weight: solid door	54 kg
Net weight: glass door	56 kg
Panel type	70 mm Frame Panel or Solid Panel (-60 suffix)
Panel thickness	20 mm
Panel height	762 mm
Panel width	445 mm
Rated frequency	50 Hz
Rated voltage	220-240 v
Refrigerant charge	58 g
Foam blowing agent	HFO-1233zd

COOLING SYSTEM

