

AGE21DH


GE® 230 Volt Heat/Cool Series Room Air Conditioner

Wall Case Dimensions and Installation Information (in inches)

Note: When installing slide-out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Fixed chassis units are not suitable for through-the-wall applications.

Wall Outlets: All wiring including installation of receptacle must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum wiring may pose special problems – consult a qualified electrician.

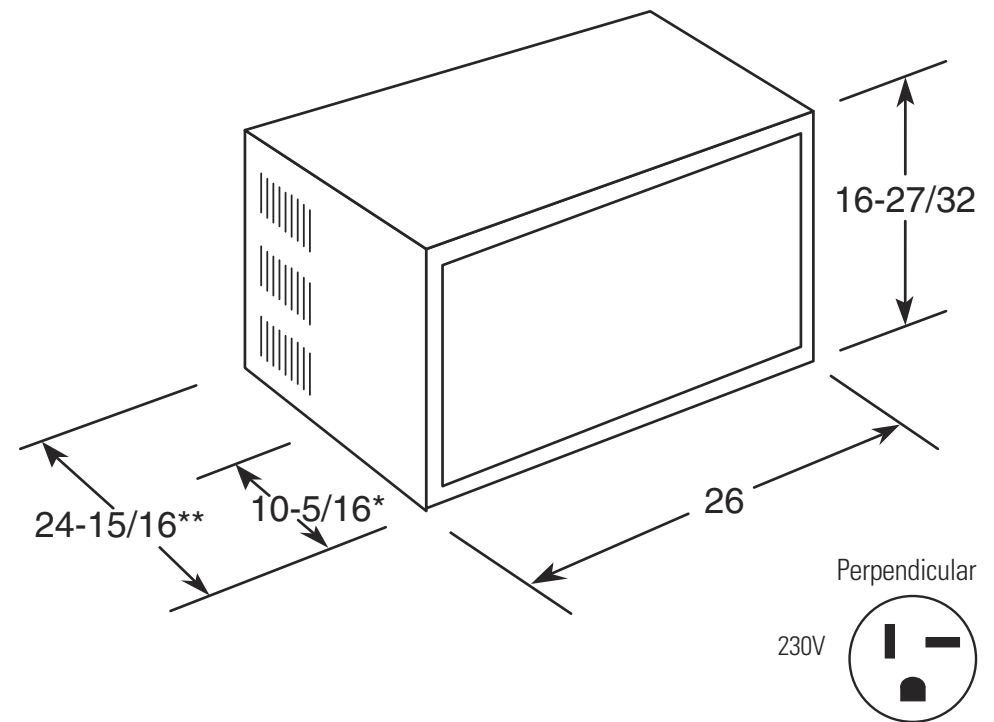

*Distance from front of case to side louvers (excluding grille)

**Excludes front grille.

For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



imagination at work



Total volume and shelf area are calculated by the Association of Home Appliance Manufacturers' standards.



Listed by Underwriters Laboratories

Specification Created 3/05


390444

AGE21DH

GE® 230 Volt Heat/Cool Series Room Air Conditioner

Features and Benefits

- 21,000/20,500 Cooling BTU
- 8.5/8.5 EER
- 11,600/9,400 Heating BTU
- Multiple Cooling / Heating Speeds
- Vent / Exhaust
- Adjustable Thermostat
- Auto Circulaire™
- Four-Way Air Direction
- Easy Access Rigid Frame, Slide-Out Filter
- Model AGE21DH

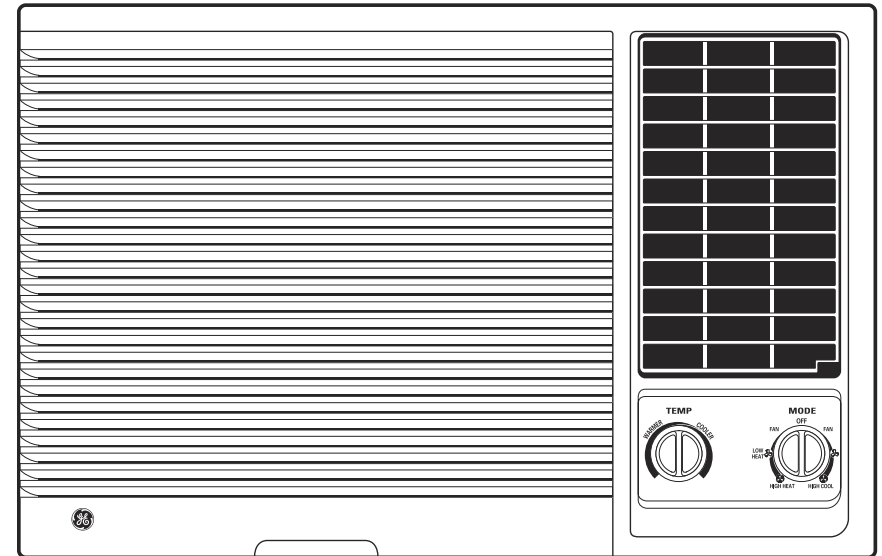

imagination at work