




GE Appliances


AJEH12DCA—GE 230 Volt "J Series" Built-In High Mount Heat and Cool Unit with Mechanical Controls

Wall Case Dimensions (in inches)

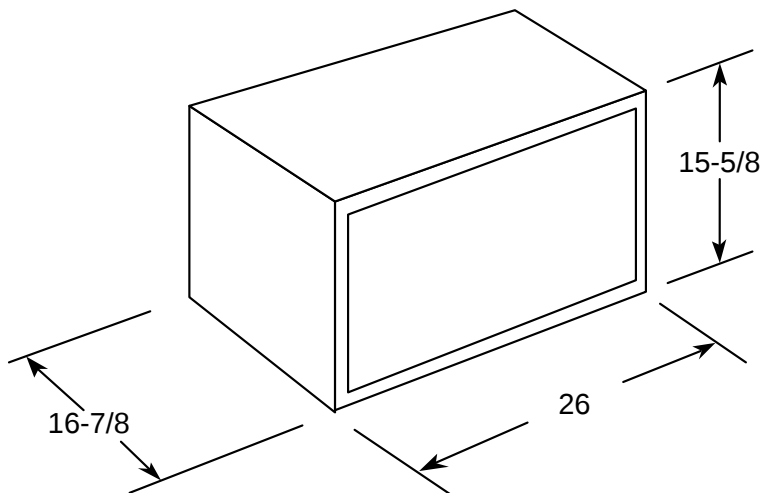

Note: When installing slide-out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas.

Perpendicular



230/208V
20 Amp

Specification Created 5/01

For answers to your Monogram,[®] GE Profile[™] or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center[®] service, 800.626.2000.



Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.




Listed by
Underwriters
Laboratories




GE Appliances

AJEH12DCA—GE 230 Volt "J Series" Built-In High Mount Heat and Cool Unit with Mechanical Controls


Dimensions (in inches)

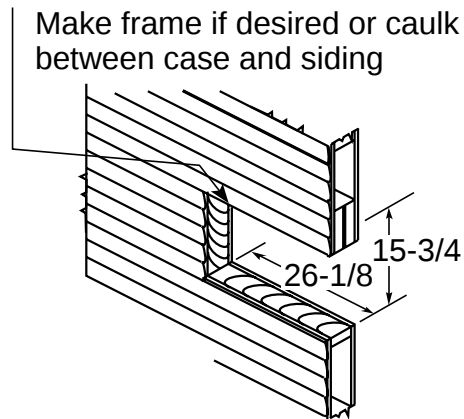

Frame Construction

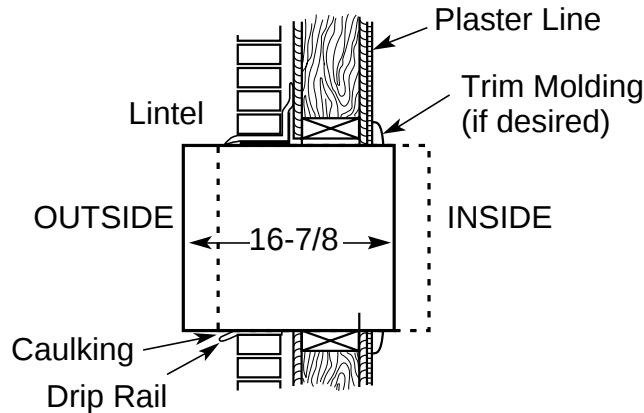

Flexible Mounting Position

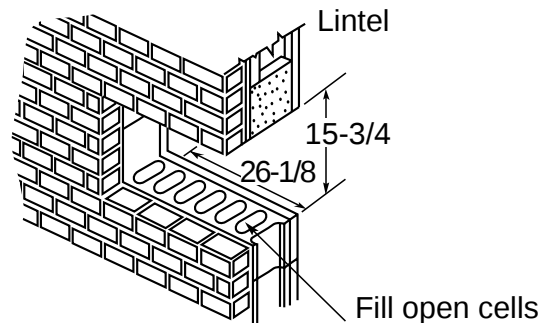

Brick Block and Brick Frame Construction

Installation Information: A finished opening of 26-1/8" x 15-3/4" clear of intrusions is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.

Note: Units should be caulked on all four sides of case to the building exterior to assure building integrity.

Two Wall Cases for Tenant Option Installation

When the air conditioner is offered as a tenant option, these wall cases provide protection against outside elements.

RAB47—includes wall case, exterior grille and steel closure panels.

RAB48—includes wall case, exterior grille, steel closure panel and two layers of insulation.

Standard Wall Case RAB46

Solid-sided wall case fabricated of galvanized steel with baked enamel finish. Welded areas are coated with a sealing compound to help resist rust and corrosion. Polymer gasket surrounds opening to assure tight weather seal. Aluminum grille (RAG13) is included. Panels on interior and between case and grille provide weather protection prior to installation of chassis.

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.




Listed by Underwriters Laboratories



GE Appliances

AJEH12DCA—GE 230 Volt “J Series” Built-In High Mount Heat and Cool Unit with Mechanical Controls

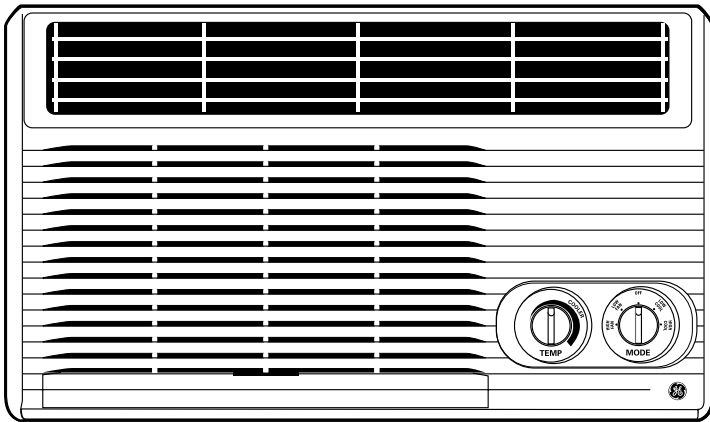

Features and Benefits

- Decorative Warm Gray-Beige Front
- 11,600/11,400 BTUH (Cooling), 11,600/9,500 BTUH (Electric Heat), 9.0/9.0 E.E.R., 230/208 Volts
- Easy-To-Reach Controls for High Mount Installations
- Fan Cycle Switch for Reduced Energy Consumption
- Variable Setting Thermostat
- 2 Cooling/2 Heat/2 Fan Only Speeds
- Includes Two-Stage Heating Thermostat
- Slide-Out Filter for Easy Cleaning
- Exhaust for Air Exchange
- Slide-Out Chassis
- Chassis Only—Without Wall Case and Mounting Kit
- Wall Case—Optional Accessory (RAB46/47/48)
- Window Mounting Kit—Optional Accessory
- Plug Type—Perpendicular
- Rotary Compressor
- Model AJEH12DCA