



GE[®] room air conditioners

#1 preferred brand of room air conditioners.



Comforting solutions.






GE units **offer** you and your customers plenty of **choices**. The unique GE line provides the features your customers look for and you **demand**.

Choose from window or through-the-wall installation models. Pick from heat pump, electric resistance heat or **choose** the cooling only models. Plus, most units come with the **reliability** of microprocessor or solid-state controls. All units offer contemporary **styling** and are easy to install and maintain. So, regardless of type or scope of your project, GE delivers **dependable**, quality units that meet your specifications—and exceed your customer's **expectations**.

Feature gallery — GE® electronic room air conditioners

#1 preferred brand of room air conditioners.

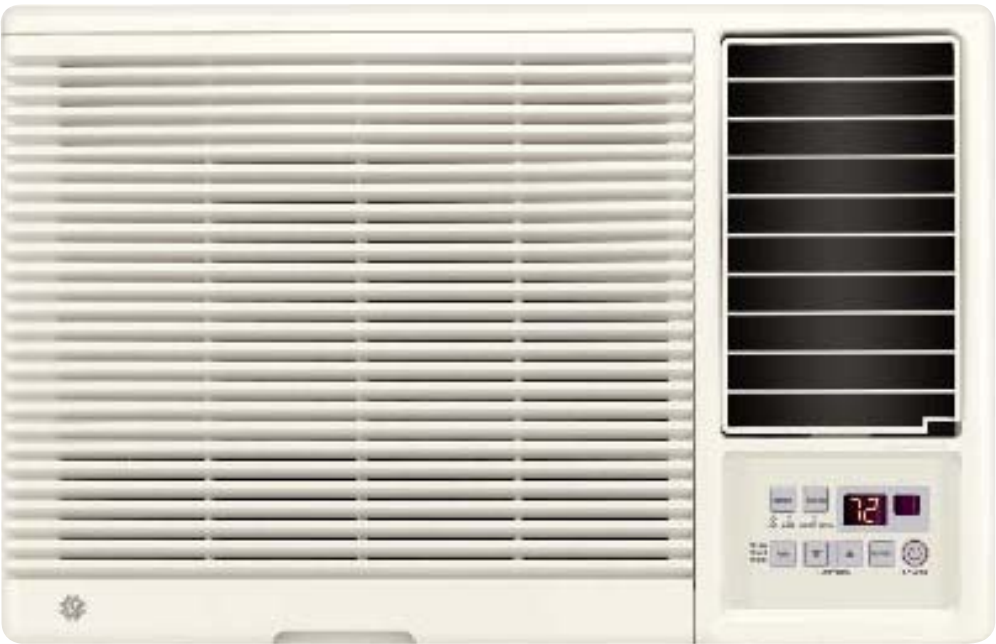

GE model AGM18DH



Energy Saver feature

Once the room is cool enough, the thermostat will shut down the compressor and fan, saving energy and money.



Timer

Electronic models feature a timer control so you can program the air conditioner to turn "on" or "off" when you're not around.



Auto Circulaire™

Creates a cooler, more even temperature throughout the room. Oscillating louvers automatically distribute the air evenly.



Remote control

Cooling comfort is at your fingertips with remote control convenience.



Power interruption restart

Remembers and restarts the unit at the setting prior to the loss of power.



Quiet

Enjoy total room comfort with whisper quiet operation.



ENERGY STAR®-qualified

Certified to exceed ENERGY STAR guidelines for energy efficiency.



Easy mount

Designed for ease of installation and requires no prior experience or special tools.

Feature gallery — GE® built-in room air conditioners

#1 preferred brand of room air conditioners.



GE model AJCQ12DCB



Timer

Electronic models feature a timer control so you can program the air conditioner to turn "on" or "off" when you're not around.



Appearance

Clean lines, smooth curves and contemporary design help the air conditioner blend into a room.



Upfront filters

Upfront easy to clean filters make maintenance a breeze.



High-mount

Controls and filter located at bottom of unit for easy access when mounted high in wall offering installation flexibility.



ENERGY STAR®-qualified

Cool-only models certified to exceed ENERGY STAR guidelines for energy efficiency.



Remote control

Cooling comfort is at your fingertips with remote control convenience.




Power interruption restart

Remembers and restarts the unit at the setting prior to the loss of power.

Electronic room air conditioners

#1 preferred brand of room air conditioners.

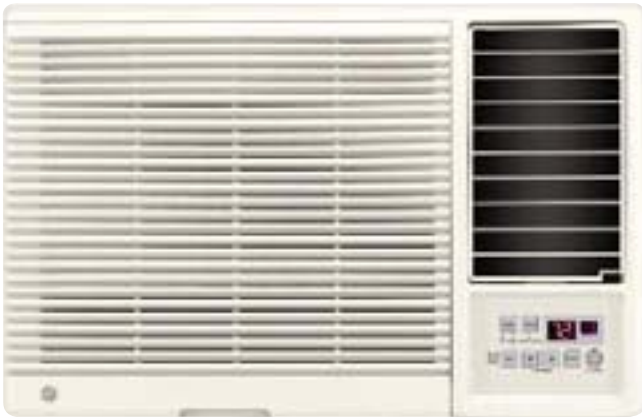

GE® electronic

- ENERGY STAR®-qualified
- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Slide-out chassis
- 24-hour timer
- Auto Circulaire™
- Energy Saver feature
- EZ Mount window kit
- Power interruption restart



AGM24DH

- 23,800/23,300 BTU, 9.4/9.4 EER, 230/208 Volts

AGM18DH

- 17,800/17,300 BTU, 10.7/10.7 EER, 230/208 Volts

AGM14AH

- 13,800 BTU, 10.8 EER, 115 Volts

AGM12AH

- 12,000 BTU, 10.8 EER, 115 Volts

AGM10AH

- 10,000 BTU, 10.8 EER, 115 Volts

GE electronic

- ENERGY STAR-qualified
- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Slide-out chassis
- 24-hour timer
- Auto Circulaire
- Energy Saver feature
- EZ Mount window kit
- Power interruption restart



AGM08LH

- 8,000 BTU, 10.8 EER, 115 Volts

AGM06LH

- 5,950 BTU, 10.8 EER, 115 Volts



GE electronic

- ENERGY STAR-qualified
- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Fixed chassis
- 24-hour timer
- Energy Saver feature
- EZ Mount window kit
- Power interruption restart



AGM05LH

- 5,200 BTU, 10.7 EER, 115 Volts



GE electronic

- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Slide-out chassis
- 12-hour timer
- Auto Circulaire
- Energy saver feature
- EZ Mount window kit
- Power interruption restart

AGQ24DH

- 23,800/23,300 BTU, 8.5/8.5 EER, 230/208 Volts

AGQ18DH

- 18,000/17,500 BTU, 9.7/9.7 EER, 230/208 Volts

AGQ14AH

- 13,800 BTU, 10.0 EER, 115 Volts



AGQ12AH

- 12,000 BTU, 9.8 EER, 115 Volts
(This model does not include Auto Circulaire or Energy saver feature)

AGQ12DH

- 12,000/11,500 BTU, 9.8/9.8 EER, 230/208 Volts
(This model does not include Auto Circulaire or Energy saver feature)



AGQ10AH

- 10,000 BTU, 9.8 EER, 115 Volts
(This model does not include Auto Circulaire or Energy saver feature)

AGQ08AH

- 8,000 BTU, 9.8 EER, 115 Volts
(This model does not include Auto Circulaire or Energy saver feature)



GE electronic

- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Fixed chassis
- 12-hour timer
- EZ Mount window kit
- Power interruption restart

AGQ06LH

- 6,000 BTU, 9.7 EER, 115 Volts



GE electronic

- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Fixed chassis
- 12-hour timer
- EZ Mount window kit
- Power interruption restart

AGQ05LH

- 5,150 BTU, 9.7 EER, 115 Volts

Mechanical room air conditioners

#1 preferred brand of room air conditioners.



GE® mechanical

- 3 cool/2 fan speeds
- 8-position thermostat
- Slide-out chassis
- Auto Circulaire™
- Energy Saver feature
- EZ Mount window kit

AGV24DH

- 23,800/23,300 BTU, 8.5/8.5 EER, 230/208 Volts

AGV14AH

- 13,800 BTU, 10.0 EER, 115 Volts

AGV18DH

- 18,000/17,500 BTU, 9.7/9.7 EER, 230/208 Volts



GE mechanical

- 3 cool/2 fan speeds
- 8-position thermostat
- Slide-out chassis
- EZ Mount window kit

AGV12AH

- 12,000 BTU, 9.8 EER, 115 Volts

AGV10AH

- 10,000 BTU, 9.8 EER, 115 Volts

AGV08AH

- 8,000 BTU, 9.8 EER, 115 Volts



GE mechanical

- 3 cool/2 fan speeds
- 8-position thermostat
- Fixed chassis
- EZ Mount window kit

AGV06LH

- 6,000 BTU, 9.7 EER, 115 Volts



GE mechanical

- 2 cool/2 fan speeds
- Adjustable thermostat
- Fixed chassis
- EZ Mount window kit

AGV05LH

- 5,150 BTU, 9.7 EER, 115 Volts



GE mechanical

- ENERGY STAR®-qualified
- 3 cool/2 fan speeds
- 8-position thermostat
- Fixed chassis
- EZ Mount window kit



AGF05LH

- 5,200 BTU, 10.7 EER, 115 Volts

Slide-Aire room air conditioners



GE® Slide-Aire room air conditioners

- 10-position thermostat
- Vertical slider kit panel
- Multiple cooling and fan speeds
- Four-way adjustable air discharge

AGX10AH

- 10,000 BTU, 9.5 EER, 115 Volts

AGX08FH

- 8,000 BTU, 9.5 EER, 115 Volts

Heat/cool series



GE heat/cool series

- Multiple cooling/heating speeds
- Vent/Exhaust
- Adjustable thermostat
- Auto Circulaire™
- Four-way adjustable air discharge
- Easy access filter

AGE21DH

- 21,000/20,500 BTU, 8.5/8.5 EER, 11,600/9,400 BTU Heat, 230/208 Volts

AGE18DH

- 18,000/17,500 BTU, 9.7/9.7 EER, 11,600/9,400 BTU Heat, 230/208 Volts

AGE14DH

- 14,000/13,500 BTU, 9.7/9.7 EER, 11,600/9,400 BTU Heat, 230/208 Volts

AGE12DH

- 12,000/11,500 BTU, 9.8/9.8 EER, 11,200/9,200 BTU Heat, 230/208 Volts (This model does not include Auto Circulaire)

AGE07AH

- 7,000 BTU, 9.7 EER, 3,850 BTU Heat, 115 Volts (This model does not include Auto Circulaire)

Dehumidifiers



GE dehumidifiers

- ENERGY STAR®-qualified
- Automatic humidistat control
- Electronic controls
- Automatic shut-off system with bucket full indicator
- Easy roll casters
- External drain connector
- Automatic defrost control

AHG50LH

- 50 pints per day

AHG40LH

- 40 pints per day

AHG30LH

- 30 pints per day
(Not an ENERGY STAR model)



control panel

Portable air conditioners



GE portable models

- Contemporary design
- Electronic controls
- Digital temperature readout
- 3 cool/3 fan speeds
- 24-hour timer
- Auto Circulaire
- Easy roll casters
- Adjustable exhaust hose
- Self evaporating condensate removal


APH10AA

- 10,000 BTU, 120 Volts



control panel

Low profile air conditioners

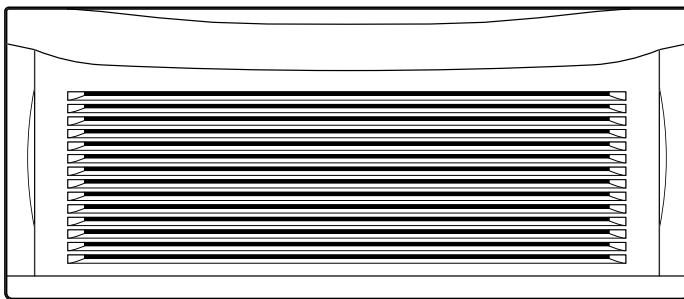


GE low profile air conditioner

- Contemporary design
- Electronic controls
- Digital temperature readout
- 3 cool/3 fan speeds
- 12-hour timer

AGP07LH

- 7,000 BTU, 10.0 EER, 115 Volts



control panel

Built-in room air conditioners

#1 preferred brand of room air conditioners.



GE® standard-mount electronic cool only

- ENERGY STAR®-qualified
- Electronic control with remote
- Electronic digital thermostat
- Four-way air direction
- Up-front, washable air filter
- 3 cool/3 fan speeds
- Power interruption restart



AJCQ06LCB

- 6,000 BTU, 10.0 EER, 115 Volts

AJCQ08ACB

- 8,000 BTU, 9.5 EER, 115 Volts

AJCQ10ACB

- 9,900 BTU, 9.5 EER, 115 Volts

AJCQ10DCB

- 9,900/9,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCQ12DCB

- 11,600/11,400 BTU, 9.5/9.5 EER, 230/208 Volts



GE standard-mount cool only

- ENERGY STAR-qualified
- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 fan speeds



AJCS06LCB

- 6,000 BTU, 10.0 EER, 115 Volts

AJCS08ACB

- 8,000 BTU, 9.5 EER, 115 Volts

AJCS10ACB

- 9,900 BTU, 9.5 EER, 115 Volts

AJCS09DCB

- 8,900/8,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCS10DCB

- 9,900/9,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCS12DCB

- 11,600/11,400 BTU, 9.5/9.5 EER, 230/208 Volts



GE high-mount cool only

- ENERGY STAR-qualified
- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 fan speeds



AJCH08ACB

- 8,000 BTU, 9.5 EER, 115 Volts

AJCH10ACB

- 9,900 BTU, 9.5 EER, 115 Volts

AJCH10DCB

- 9,900/9,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCH12DCB

- 11,600/11,400 BTU, 9.5/9.5 EER, 230/208 Volts



GE standard-mount heat/cool

- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 heat/2 fan only speeds

AJES06LSB

- 6,000 BTU cool, 4,100 BTU heat, 10.0 EER rating, 115 Volts

AJES08ASB

- 8,000 BTU cool, 4,100 BTU heat, 9.5 EER, 115 Volts

AJES10DSB

- 9,900/9,700 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

AJES09DCB

- 8,900/8,700 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

AJES10DCB

- 9,900/9,700 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

AJES12DCB

- 11,600/11,400 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts



GE high-mount heat/cool

- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 heat/2 fan only speeds

AJEH12DCB

- 11,600/11,400 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts



GE heat pump

- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 heat/2 fan only speeds

AJHS08ASB

- 8,000 BTU cool, 7,700 BTU pump, 4,100 BTU heat, 9.5 EER, 115 Volts

AJHS08DCB

- 8,000/7,800 BTU cool, 7,700/7,500 BTU pump, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

AJHS10DCB

- 9,900/9,700 BTU cool, 9,700/9,500 BTU pump, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

Electronic room air conditioners

(preliminary specifications)

	Deluxe 230 Volt		Deluxe 115 Volt					
	AGM24DH	AGM18DH	AGM14AH	AGM12AH	AGM10AH	AGM08LH	AGM06LH	AGM05LH
Features								
ENERGY STAR®-qualified	●	●	●	●	●	●	●	●
BTUH	23,800/23,300	17,800/17,300	13,800	12,000	10,000	8,000	5,950	5,200
Voltage	230/208	230/208	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	9.4/9.4	10.7/10.7	10.8	10.8	10.8	10.8	10.8	10.7
Amps	TBD	7.4/7.9	12.0	10.2	8.5	6.8	5.0	4.4
Watts	TBD	1,660/1,620	1,280	1,110	920	740	550	480
Plug Type	Perpendicular	Tandem/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle
Energy Saver Feature	●	●	●	●	●	●	●	●
Dehumidification (pints/hr)	TBD	4.6	4.6	3.3	3.3	2.3	1.8	1.4
Auto Circulaire™	●	●	●	●	●	●	●	●
Fan Speeds (Cool/Fan Only)	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/3
CFM (High Shown) (Indoor)	TBD	445	350	300	270	240	210	140
Vent/exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust
Thermostat	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Filter Type	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	18	18	16	16	16	14	14	13
Window Opening Width (in inches) min.	29	29	27	27	27	22	22	22
max.	41	41	39	39	39	36	36	36
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Case Dimensions								
Height (in inches) A	TBD	16-27/32	16-27/32	15	15	13-7/8	13-7/8	12-9/32
Width (in inches) B	TBD	26	26	23-5/8	23-5/8	18-9/16	18-9/16	18-9/16
Depth (in inches) C	TBD	24-15/16	24-15/16	20-9/32	20-9/32	19-5/32	19-5/32	13-27/32
Depth to louvers (in inches) D	TBD	10-5/16	10-5/16	8-5/8	8-5/8	8-1/4	8-1/4	6-1/4
Net Weight (lbs.)	TBD	124	124	80	79	62	57	46
Approx. Shipping Weight (lbs.)	TBD	134	134	89	87	68	63	50

	230 Volt			115 Volt					
	AGQ24DH	AGQ18DH	AGQ12DH	AGQ14AH	AGQ12AH	AGQ10AH	AGQ08AH	AGQ06LH	AGQ05LH
Features									
BTUH	23,800/23,300	18,000/17,500	12,000/11,500	13,800	12,000	10,000	8,000	6,000	5,150
Voltage	230/208	230/208	230/208	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.5/8.5	9.7/9.7	9.8/9.8	10.0	9.8	9.8	9.8	9.7	9.7
Amps	12.2/11.0	8.2/8.9	5.5/5.8	12.0	11.0	9.2	7.6	5.8	4.9
Watts	2,480/2,530	1,850/1,800	1,220/1,170	1,380	1,220	1,020	820	620	530
Plug Type	Perpendicular	Tandem	Tandem	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle
Energy Saver Feature	●	●	●	●	●	●	●	●	●
Dehumidification (pints/hr)	7.5	5.5	3.3	4.6	3.3	3.0	2.3	1.5	1.5
Auto Circulaire™	●	●	●	●	●	●	●	●	●
Fan Speeds (Cool/Fan Only)	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/3
CFM (High Shown) (Indoor)	560	440	280	350	310	250	230	140	140
Vent/exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust
Thermostat	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Filter Type	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	18	18	16	16	16	14	14	13	12
Window Opening Width (in inches) min.	29	29	27	27	27	22	22	22	21
max.	41	41	39	39	39	36	36	36	35
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System) Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Case Dimensions									
Height (in inches) A	16-27/32	16-27/32	15	15	15	13-7/8	13-7/8	12-9/32	11-1/8
Width (in inches) B	26	26	23-5/8	23-5/8	23-5/8	18-7/16	18-7/16	18-9/16	17-5/16
Depth (in inches) C	28-21/32	24-15/16	20-9/32	20-9/32	20-9/32	19-5/32	19-5/32	13-27/32	12-3/8
Depth to louvers (in inches) D	10-5/16	10-5/16	8-5/8	8-5/8	8-5/8	8-1/4	8-1/4	6-1/4	4-1/8
Net Weight (lbs.)	146	117	80	87	79	69	60	46	40
Approx. Shipping Weight (lbs.)	176	127	89	96	87	75	66	50	44


Mechanical room air conditioners

(preliminary specifications)

	230 Volt		Deluxe 115 Volt	115 Volt					
	AGV24DH	AGV18DH	AGF05LH	AGV14AH	AGV12AH	AGV10AH	AGV08AH	AGV06LH	AGV05LH
Features									
ENERGY STAR®-qualified			●						
BTUH	23,800/23,300	18,000/17,500	5,200	13,800	12,000	10,000	8,000	6,000	5,150
Voltage	230/208	230/208	115	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.5/8.5	9.7/9.7	10.7	10.0	9.8	9.8	9.8	9.7	9.7
Amps	12.2/11.0	8.2/8.9	4.4	12.0	11.0	9.2	7.6	5.8	4.9
Watts	2,480/2,530	1,850/1,800	480	1,380	1,220	1,020	820	620	530
Plug Type	Perpendicular	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel
Energy Saver Feature	●	●		●					
Dehumidification (pints/hr.)	7.5	5.5	1.5	4.6	3.3	3.0	2.3	1.5	1.5
Auto Circulair™	●	●		●					
Fan Speeds (Cool/Fan Only)	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2	2/2
CFM (High Shown) (Indoor)	560	440	140	350	310	250	230	140	140
Vent/exhaust	Exhaust	Exhaust		Exhaust	Exhaust	Exhaust	Exhaust		
Thermostat	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	Adjustable
Filter Type	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out
Chassis	Slide-Out	Slide-Out	Fixed	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	18	18	13	16	16	14	14	13	12
Window Opening Width (in inches) min.	29	29	22	27	27	22	22	22	21
max.	41	41	36	39	39	36	36	36	35
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System) Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Case Dimensions									
Height (in inches) A	16-27/32	16-27/32	12-9/32	15	15	13-7/8	13-7/8	12-9/32	11-1/8
Width (in inches) B	26	26	18-9/16	23-5/8	23-5/8	18-7/16	18-7/16	18-9/16	17-5/16
Depth (in inches) C	28-21/32	24-15/16	13-27/32	22-1/2	22-1/2	19-5/32	19-5/32	13-27/32	12-3/8
Depth to louvers (in inches) D	10-5/16	10-5/16	6-1/4	8-5/8	8-5/8	8-1/4	8-1/4	6-1/4	4-1/8
Net Weight (lbs.)	146	117	46	87	79	69	60	46	40
Approx. Shipping Weight (lbs.)	158	127	50	96	87	75	66	50	44

*See written warranty for details.

Wall case dimensions

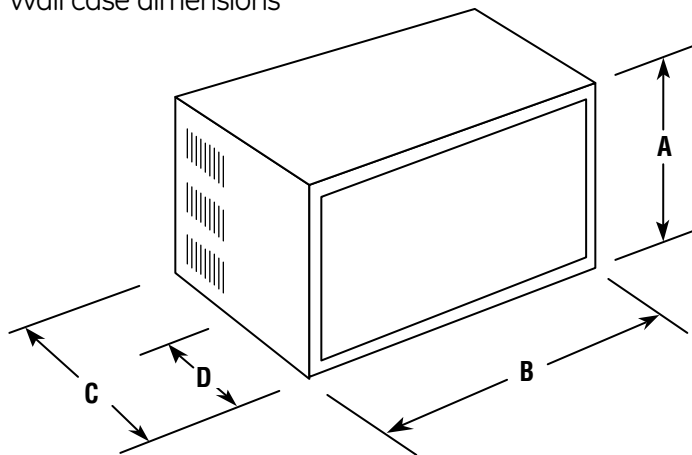

D = Distance from front of case to side louvers (excluding grille).

Note: When installing slide out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Fixed chassis units are not suitable for through-the-wall applications.

Wall outlets



Parallel
115V.
15 Amp.



Perpendicular
230/208V.
20 Amp.



Tandem
230/208V.
15 Amp.



Large Tandem
230/208V.
30 Amp.

Wall Outlets

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum building wiring may pose special problems— consult a qualified electrician.

Slide-Aire room air conditioners

(preliminary specifications)

	GE®	
	AGX10AH	AGX08FH
Features		
BTUH	10,000	8,000
Voltage	115	115
E.E.R. (BTUH/Watt)	9.5	9.5
Amps	9.6	7.7
Watts	1,050	840
Plug Type	Parallel	Parallel
Dehumidification (pints/hr.)	3.5	2.3
Fan Speeds (Cool/Fan Only)	3/2	3/2
CFM (High Shown) (Indoor)	280	250
Vent/exhaust	Exhaust	Exhaust
Thermostat	10-Position	10-Position
Filter Type	Rigid frame/ Slide-out	Rigid frame/ Slide-out
Chassis	Fixed	Fixed
Window Mounting	V-Std. Mount	V-Std. Mount
	min.	21-1/2
Window Opening Height	max.	40-1/2
Window Opening Width (in inches) min.		15-1/2
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.	Full 5-Yr.
Case Dimensions		
Height (in inches)	A	20-1/2
Width (in inches)	B	14-1/2
Depth (in inches)	C	23
Depth to louvers (in inches)	D	9
Net Weight (lbs.)		76-1/4
Approx. Shipping Weight (lbs.)		88.5

Heat/cool series

(preliminary specifications)

Model	GE				
	AGE21DH	AGE18DH	AGE18DH	AGE12DH	AGE07AH
Voltage	230/208	230/208	230/208	230/208	115
Cooling Capacity					
BTUH-AHAM	21,000/20,500	18,000/17,500	14,000/13,500	12,000/11,500	7,000
Amps-AHAM	10.8/11.8	8.3/9.0	6.4/6.8	5.5/5.8	6.6
Watts Input	2,470/2,410	1,850/1,800	1,440/1,390	1,220/1,170	720
EER	8.5/8.5	9.7/9.7	9.7/9.7	9.8/9.89	9.7
Dehumidification (Pts./Hr.)	6.3	5.5	4.6	3.3	2.3
Electric Resistance Heating					
BTUH	11,600/9,400	11,600/9,400	11,600/9,400	11,200/9,200	3,850
Amps	16/15	16/15	16/15	15.3/14	11.0
Watts Input @ 230V	3,720/3,150	3,670/3,100	3,670/3,100	3,500/2,900	1,260
Features					
Line Cord Plug	Perp.	Perp.	Perp.	Perp.	Perp.
Recommended Circuit Protection (Time Delay)	20 Amps	20 Amps	20 Amps	20 Amps	20 Amps
Fan Speeds, Heating/Cooling	2/2	2/2	2/2	2/2	2/2
Fan Only Setting	1	1	1	1	1
Air Flow (CFM) Roomside Hi/Low	405	425	434	300	205
Air Exchange Exhaust	●	●	●	●	●
Rotary Compressor	●	●	●	●	●
Slide-Out Chassis	●	●	●	●	●
Window Installation Kit	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Approximate Net Weight (Lbs.)	135	120	112	90	69
Approximate Shipping Wt. (Lbs.)	143	133	125	96	75

Dehumidifiers (preliminary specifications)

	GE		
	ENERGY STAR® AHG50LH	ENERGY STAR AHG40LH	AHG30LH
Features			
Dehumidification (pints/day)	50	40	30
Dry Airflow (CFM)	125/115	125/115	140/127
Color	Cameo White	Cameo White	Cameo White
Auto Shut Off	●	●	●
Automatic Defrost	●	●	●
Water Full indicator	●	●	●
Fan speeds	2	2	2
Removable bucket	●	●	●
Bucket capacity (pints)	21	21	21
External drain connector	●	●	●
Casters - 4 movable	●	●	●
Voltage	115	115	115
Watts	600	580	480
Amps	6.0	5.4	5.8
Circuit size (Amps)	15	15	15
Plug type	Parallel	Parallel	Parallel
Case Dimensions			
Height (in inches)	20-7/8	20-7/8	20-7/8
Width (in inches)	12-5/8	12-5/8	12-5/8
Depth (in inches)	17-1/8	17-1/8	17-1/8
Shipping weight (lbs.)	43.2	40.1	52.6
Net weight (lbs.)	39.5	36.14	48.7

Portable room air conditioners (preliminary specifications)

	GE
	APH10AA
Features	
BTUH	10,000
Voltage	120
Amps	11.6
Plug Type	Parallel
Dehumidification (pints/hr.)	4.0
Timer	24-Hour
Fan Speeds (Cool/Fan Only)	3/3
Vent/exhaust	Exhaust
Thermostat	Electronic
Filter Type	Rigid frame/ Slide-out
Window Mounting	V-Std. Mount
Window Opening Height (min./max. in inches)	40-1/2
Window Opening Width (min. in inches)	28-2/5
Warranty* (Entire Unit)	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.
Case Dimensions	
Height (in inches)	33.3
Width (in inches)	17.7
Depth (in inches)	18.6
Net Weight (lbs.)	85.7
Approx. Shipping Weight (lbs.)	100.8

Low profile room air conditioners (preliminary specifications)

	GE
	AGP07LH
Features	
BTUH	7,000
Voltage	115
E.E.R. (BTUH/Watt)	10.0
Amps	6.0
Watts	700
Plug Type	Parallel
Energy Saver Feature	
Dehumidification (pints/hr)	TBD
Auto Circulaire™	
Fan Speeds (Cool/Fan Only)	3/3
CFM (High Shown) (Indoor)	212
Vent/exhaust	
Thermostat	Electronic
Filter Type	Rigid Frame/ Slide-out
Chassis	Fixed
Window Mounting	EZ Mount
Window Opening Height (min. in inches)	15-1/2
Window Opening Width (in inches) min.	21-1/2
max.	40-1/2
Warranty* (Entire Unit)	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.
Case Dimensions	
Height (in inches) A	12
Width (in inches) B	20-13/15
Depth (in inches) C	18-1/32
Depth to louvers (in inches) D	TBD
Net Weight (lbs.)	55
Approx. Shipping Weight (lbs.)	62

*See written warranty for details.

Built-in “J” series—cool only

	GE®														
	Electronic Units					Mechanical Units						High-Mount Units			
Models	AJCQ06LCB	AJCQ08ACB	AJCQ10ACB	AJCQ10DCB	AJCQ12DCB	AJCS06LCB	AJCS08ACB	AJCS10ACB	AJCS09DCB	AJCS10DCB	AJCS12DCB	AJCH08ACB	AJCH10ACB	AJCH10DCB	AJCH12DCB
ENERGY STAR®	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Voltage	115	115	115	230/208	230/208	115	115	115	230/208	230/208	230/208	115	115	230/208	230/208
Cooling Capacity															
BTUH-AHAM	6000	8000	9900	9900/9700	11600/11400	6000	8000	9900	8900/8700	9900/9700	11600/11400	8000	9900	9900/9700	11600/11400
Amps-AHAM	5.7	7.9	9.7	4.9/5.3	5.8/6.3	5.7	7.9	9.7	4.2/4.6	4.9/5.3	5.8/6.3	7.9	9.7	4.9/5.3	5.8/6.3
Watts Input	600	840	1040	1040/1020	1220/1200	600	840	1040	935/915	1040/1020	1220/1200	840	1040	1040/1020	1220/1200
EER	10.0	9.5	9.5	9.5/9.5	9.5/9.5	10.0	9.5	9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5	9.5	9.5/9.5	9.5/9.5
Dehumidification (Pts./Hr.)	1.4	2.1	2.9	2.9	3.4	1.4	2.1	2.9	2.5	2.9	3.4	2.1	2.9	2.9	3.4
Features															
Line Cord Plug	Parallel	Parallel	Parallel	Tandem	Tandem	Parallel	Parallel	Parallel	Tandem	Tandem	Tandem	Parallel	Parallel	Tandem	Tandem
Recommended Circuit Protection (Time Delay)	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps
Fan Speeds	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2
Fan Only Setting	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2
Air Flow (CFM) Roomside Hi/Low	212/184	240/212	282/254	282/254	304/279	212/184	240/212	282/254	282/254	282/254	304/279	240/212	282/254	282/254	304/279
Air Exchange Exhaust	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Fan Cycle Switch	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Rotary Compressor	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Slide-Out Chassis	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Installation	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall
Wall Case Required	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48
Approximate Net Weight (lbs.)	63	68	77	77	79	63	68	77	69	77	79	69	78	78	80
Approximate Shipping Wt. (lbs.)	72	77	86	86	88	72	77	86	79	86	88	78	87	87	89

Built-in “J” series—heat/cool and heat pumps

	GE®									
	Heat/Cool Units						High-Mount	Heat Pumps		
Model	AJES06LSB*	AJES08ASB*	AJES10DSB	AJES09DCB	AJES10DCB	AJES12DCB	AJEH12DCB	AJHS08ASB*	AJHS08DCB	AJHS10DCB
Voltage	115	115	230/208	230/208	230/208	230/208	230/208	115	230/208	230/208
Cooling Capacity										
BTUH-AHAM	6000	8000	9900/9700	8900/8700	9900/9700	11600/11400	11600/11400	8000	8000/7800	9900/9700
Amps-AHAM	5.7	7.9	4.9/5.3	4.2/4.6	4.9/5.3	5.8/6.3	5.8/6.3	7.9	4.0/4.3	4.9/5.3
Watts Input	600	840	1040/1020	935/915	1040/1020	1220/1200	1220/1200	840	840/820	1040/1020
EER	10.0	9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5	9.5/9.5	9.5/9.5
Dehumidification (Pts./Hr.)	1.4	2.1	2.9	2.5	2.9	3.4	3.4	2.1	2.1	2.9
Reverse Cycle Heating										
BTU-AHAM								7700	7700/7500	9700/9500
C.O.P. at 47°F.								3.0	3.0/3.0	3.0/3.0
Amps-AHAM								6.8	3.4/3.7	4.3/4.7
Watts Input								750	750/730	950/930
Electric Resistance Heating										
BTUH	4100	4100	11600/9500	11600/9500	11600/9500	11600/9500	11600/9500	4100	11600/9500	11600/9500
Amps	12.0	12.0	16.0	16.0	16.0	16.0	16.0	12.0	16.0	16.0
Watts Input @ 230V	1380	1380	3670/3010	3670/3010	3670/3010	3680/3020	3680/3020	1380	3660/3000	3680/3020
Features										
Line Cord Plug	Parallel	Parallel	Perp.	Perp.	Perp.	Perp.	Perp.	Parallel	Perp.	Perp.
Recommended Circuit Protection _ (Time Delay)	15 Amps	15 Amps	20 Amps	20 Amps	20 Amps	20 Amps	20 Amps	15 Amps	20 Amps	20 Amps
Fan Cycle Switch	●	●	●	●	●	●	●	●	●	●
Fan Speeds, Heating/Cooling	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2
Fan Only Setting	2	2	2	2	2	2	2	2	2	2
Air Flow (CFM) Roomside Hi/Low	212/184	240/212	282/254	282/254	282/254	304/279	304/279	237/212	237/212	304/279
Air Exchange Exhaust	●	●	●	●	●	●	●	●	●	●
Rotary Compressor	●	●	●	●	●	●	●	●	●	●
Slide-Out Chassis	●	●	●	●	●	●	●	●	●	●
Installation	Window/Wall	Window/Wall	Window/Wall	In Wall	In Wall	In Wall	In Wall	Window/Wall	In Wall	In Wall
Wall Case Required	Included	Included	Included	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	Included	RAB46/47/48	RAB46/47/48
Window Installation Kit	Std. Mount	Std. Mount	Std. Mount	Optional	Optional	Optional	Optional	Std. Mount	Optional	Optional
Approximate Net Weight (Lbs.)	82	87	96	71	78	80	81	TBD	TBD	TBD
Approximate Shipping Wt. (Lbs.)	97	102	111	80	88	90	90	TBD	TBD	TBD

All cooling with electric heat models and heat pumps are corrosion treated. Specifications and design subject to change without notice. *These units are not intended to be the primary source of heat.

Air conditioner tips

Air flow – Keep air filters clean. Do not block air flow areas.

Roomside view – J-models feature concealed power cord storage, this eliminates excessive cord exposure when receptacle is located close to unit.




Accessories

Other accessories are available, they include: Fedders and Whirlpool sleeve adapters. Drain kits and Chassis adapters for old Hotpoint cases.

Built-in room air conditioners wall opening for RAB46/47/48 cases

A finished opening of 26-1/8" x 15-3/4", clear of intrusions, is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.


Note: Units should be caulked on all four sides of case to the building exterior to assure building integrity.



Two wall cases for tenant option installation
When the air conditioner is offered as a tenant option, these wall cases provide protection against outside elements.


RAB47—includes wall case, exterior grille and steel closure panels.

RAB48—includes wall case, exterior grille, steel closure panel and two layers of insulation.



Standard wall case RAB46

Solid-sided wall case fabricated of galvanized steel with baked enamel finish. Welded areas are coated with a sealing compound to help resist rust and corrosion. Polymer gasket surrounds opening to assure tight weather seal. Aluminum grille (RAG13) is included. Panels on interior and between case and grille provide weather protection prior to installation of chassis.



Parallel
115V.
15 Amp.



Tandem
230/208V.
15 Amp.



Perpendicular
230/208V.
20 Amp.

Wall outlets

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum wiring may pose special problems—consult a qualified electrician.

Note: Some models may not be available in your area due to local legislation. Contact your local dealer.

Note: When installing slide out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Fixed chassis units are not suitable for through-the-wall applications.



Listed by
Underwriters
Laboratories



Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.

Point-of-purchase materials

Three tier RAC display



Pub no. 26-D059

Merchandising Kit Free with preseason order, includes POP and full line spec — Pub. No. 26-D005

RAC Dangers

Pub no. 26-D023-2
Pub no. 26-D014-1

How to buy banner

Pub no. 26-D024

How to buy tear pad

Pub no. 26-D034

ENERGY STAR® stickers

Pub no. 1-D051

Self adhesive medallion

Pub no. 26-D030-1

Cost of cooling/sizing guide

Pub no. 26-5300-1



A century of quality and innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.