




Profile™

ASM12DB—GE Profile™ 230 Volt Window Room Air Conditioner with Electronic Remote

Wall Case Dimensions (in inches)

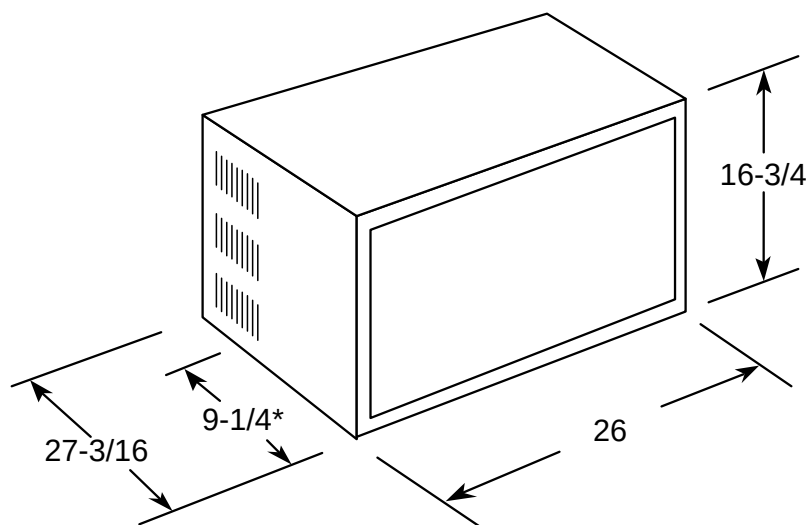

*Distance from front of case to side louvers (excluding grille).

Note: When installing Slide-Out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas.

Tandem



230/208V
15 Amp

Wall Outlets: All wiring, including installation of receptacles, must be made in accordance with local electrical codes and standards. Electrical outlet should be in reach of line cord.

Note: Aluminum building wiring may pose special problems. Consult a qualified electrician.

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.




Listed by
Underwriters
Laboratories

Specification Created 5/01



Profile™

ASM12DB—GE Profile™ 230 Volt Window Room Air Conditioner with Electronic Remote

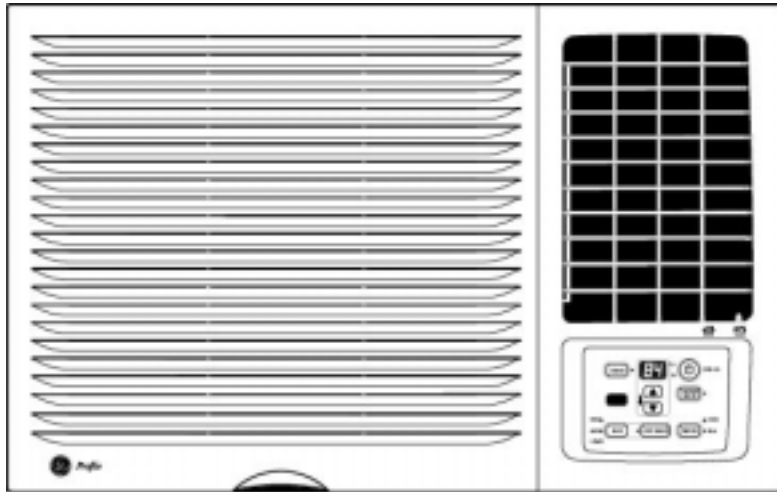

Features and Benefits

- 12,500/12,200 BTUH/ 230/208 Volts
- 10.0/10.0 EER
- Electronic Control with Electronic Thermostat
- 3 Cooling / 3 Fan Speeds
- Energy Saver Switch for Reduced Energy Cost
- 24-Hour Timer with Sleep Mode
- Circulaire-Oscillating Louvers for Enhanced Air Circulation
- 1,250/1,220 Watts / 5.8/6.4 Amps
- 3.4 Dehumidification (pints / hr)
- 350 CFM (High)
- Slide-Out Chassis
- One Touch Lift-Out Filter for Easy Cleaning
- Plug Type—Tandem
- EZ Mount Window Installation
- Model ASM12DB

Specification Created 5/01