

**Perlick®** **24" DUAL-ZONE WINE COLUMN**  
*Panel Ready Glass Door*



|           |  |
|-----------|--|
| JOB       |  |
| AREA      |  |
| ITEM NO.  |  |
| MODEL NO. |  |



*Shown with optional stainless steel door overlay panel*



*Shown with convertible shelf in display mode*

| MODELS      | DESCRIPTION   |
|-------------|---|
| CC24D-2-4LL | 24" Dual Zone Wine Column, Glass Door, Overlay Ready, Hinge Left  |
| CC24D-2-4RL | 24" Dual Zone Wine Column, Glass Door, Overlay Ready, Hinge Right |

**KEY PRODUCT FEATURES AND BENEFITS**

- Smart Humidity advanced technology monitors humidity levels in the cabinet and pushes additional moisture into the cabinet to maintain 60-70% humidity maintaining corks and prevent oxidation
- Carbon air filtration removes odors from the cabinet that could be absorbed into corks over time
- PerliQ™ touch screen control panel disappears into the background until awoken for a modern look
- Customize temperature, activate sabbath mode, or adjust lighting with the sleek PerliQ™ Control panel – Smart temperature settings for red and white wine
- All stainless steel and glass interior provides a hygienic, easy to clean, and beautiful cabinet
- R600a refrigerant - More efficient & better for the environment

**Quick Features:**

- Triple-pane, UV-resistant glass provides protection from harmful light oxidation
- Convertible display shelf showcases 6 prized wine bottles and easily lays flat to store 8 bottles without additional parts and pieces
- Blue and White LED Interior lighting; Slow fade on and off; Lighting brightness control displays intensity settings in 20% increments (20-40-60-80-100%)
- High-capacity storage up to 68 750ml bottles
- All cabinets come ready to accept a locking panel from factory with all components included to install lock on custom panels
- Integrated design comes ready to accept custom panel and hardware, stainless steel panels available (ordered separately)
- 1 Year Full Parts & Labor + 5 Year Compressor Parts

Form No. Z3016  
 Rev 07.23.24



**24" DUAL-ZONE WINE COLUMN**  
Panel Ready Glass Door

| MODEL NUMBERS                 |                    | CC24D-2-4LL                               | CC24D-2-4RL                               |
|-------------------------------|--------------------|---|---|
| MODEL DESCRIPTION             |                    | 24" Dual-Zone Wine Column Left Hinge      | 24" Dual-Zone Wine Column Right Hinge     |
| APPLIANCE EXTERIOR DIMENSIONS | Width - in. (mm)   | 23-3/4" (604)                             | 23-3/4" (604)                             |
|                               | Depth - in. (mm)   | 24-1/16" (612)**                          | 24-1/16" (612)**                          |
|                               | Height - in. (mm)  | 84" (2134)*                               | 84" (2134)*                               |
| OPENING DIMENSIONS            | Width - in. (mm)   | 24" (610)                                 | 24" (610)                                 |
|                               | Depth - in. (mm)   | 25*** (635)                               | 25*** (635)                               |
|                               | Height - in. (mm)  | 84" (2134)                                | 84" (2134)                                |
| DEPTH WITH DOOR OPEN          |                    | 49-3/4"                                   | 49-3/4"                                   |
| INTERNAL VOLUME Net. Cu. Ft.  |                    | 12.6 cu. ft.                              | 12.6 cu. ft.                              |
| SHIPPING WEIGHT Lbs. (kg.)    |                    | 514 lbs (233)                             | 514 lbs (233)                             |
| SHIPPING DIMENSIONS           | Width - in. (mm)   | 32" (813)                                 | 32" (813)                                 |
|                               | Depth - in. (mm)   | 30" (762)                                 | 30" (762)                                 |
|                               | Height - in. (mm)  | 92" (2337)                                | 92" (2337)                                |
| ELECTRICAL SPECIFICATIONS     | Electrical Supply  | 115 VAC/60 Hz/1 Ph                        | 115 VAC/60 Hz/1 Ph                        |
|                               | Running Load Amps  | 3.2 amps                                  | 3.2 amps                                  |
|                               | Electrical Service | 15 amp dedicated circuit                  | 15 amp dedicated circuit                  |
|                               | Cord Plug Type     | NEMA 5-15 plug, 5'/3 prong grounding-type | NEMA 5-15 plug, 5'/3 prong grounding-type |
| MAX BOTTLE CAPACITY           |                    | 68 750 ml. bottles                        | 68 750 ml. bottles                        |
| TEMPERATURE RANGES            | Refrigerant        | R600a (53g)                               | R600a (53g)                               |
|                               | Red Wine Mode      | Factory set to 60° (range 40°-68°F)       | Factory set to 60° (range 40°-68°F)       |
|                               | White Wine Mode    | Factory set to 50° (range 40°-68°F)       | Factory set to 50° (range 40°-68°F)       |
|                               | Cellar Mode        | Factory set to 55° (range 40°-68°F)       | Factory set to 55° (range 40°-68°F)       |

\*Leveling legs allow for up to 3/4" of additional height. Leveling appliance correctly will lead to less door adjustments required.

\*\*Depth does not include door panel, minimum 5/8" door panel is required, see installation instructions for full door panel details.


NOTE: Dual zone wine upper compartment temperature set point must always be set at or above the lower compartment set point.

**ACCESSORIES**

- 36" Two tone polished chrome and stainless steel handle
- Dual installation kits for handle-to-handle and handle-to hinge configurations
- Stainless steel overlay for glass door with four or six inch toe kick available with and without lock for field installation

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com](http://perlick.com).

**Perlick®** **24" DUAL-ZONE WINE COLUMN**  
*Panel Ready Glass Door*

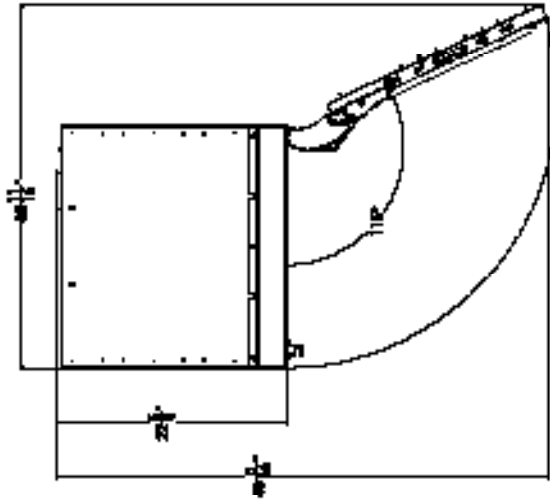


Max clearance required for opened door is 49-3/4" when opened to 90°\* (dimensions shown are without door overlay installed.)

(Please note that door opens to 115°.)

\*90° achieved when included hinge stop pin is installed. Pin must be installed prior to full integration.

PLEASE NOTE: When installing column adjacent to wall, a 2" clearance is required if door opens towards the wall.

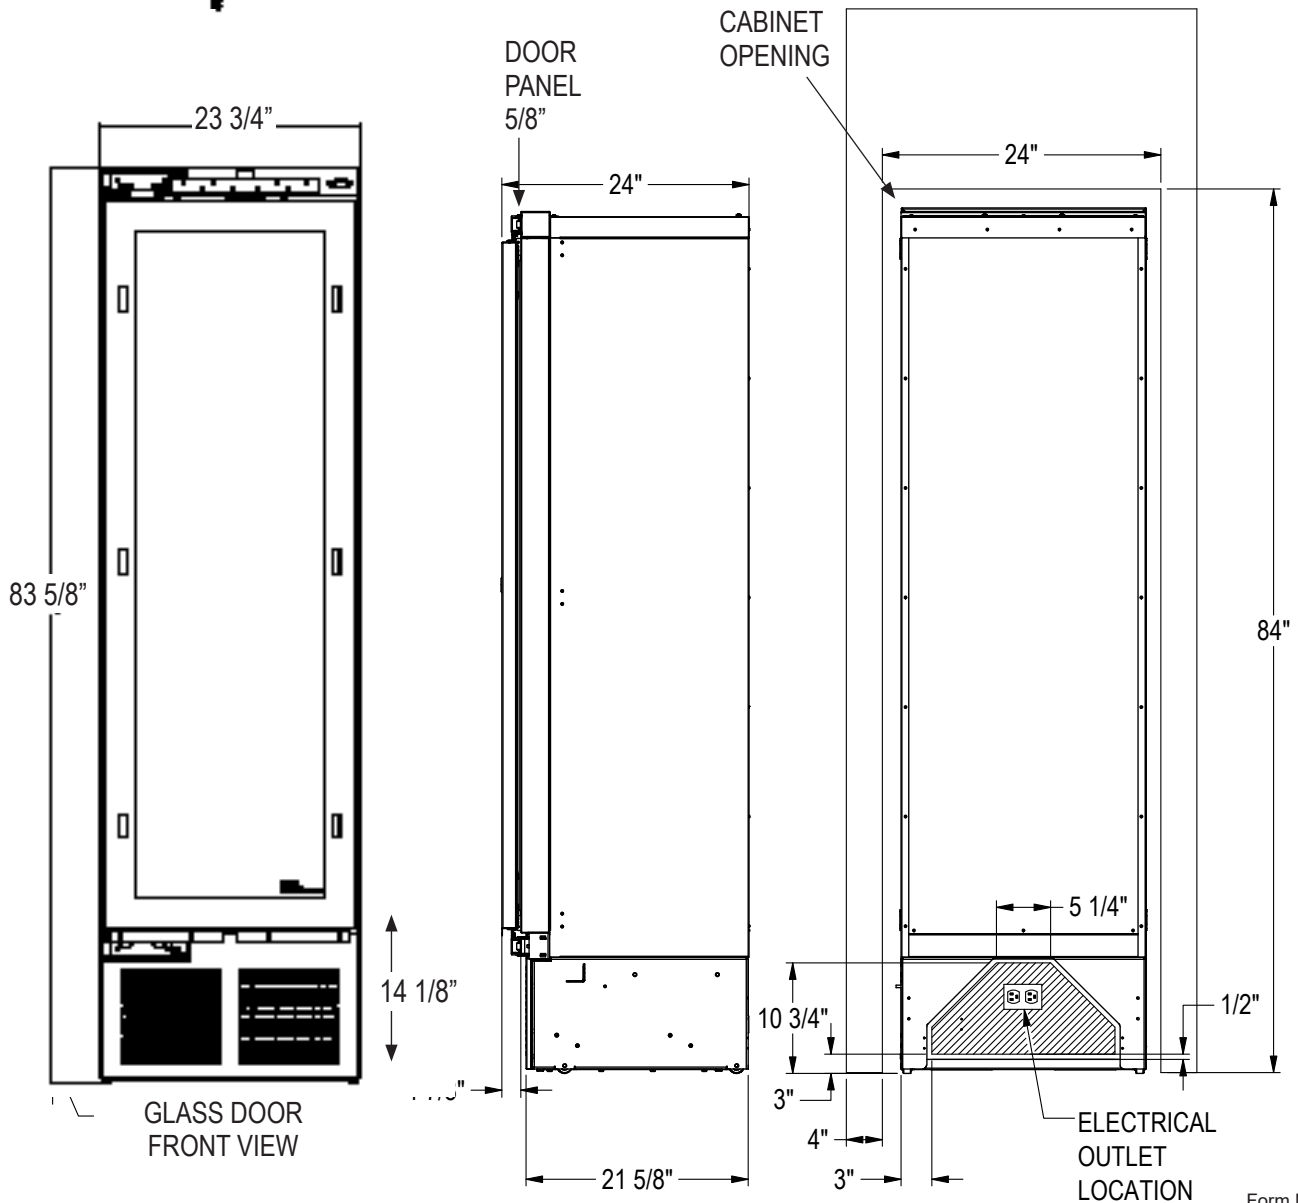

GLASS DOOR FRONT VIEW

ELECTRICAL OUTLET LOCATION

Form No. Z3016  
 Rev 07.23.24