

CE304C/B

FEATURES

Accommodates different pan sizes easily with four separate burner elements, one with a bridging zone, and three flexible zones on the largest element.

Controls performance with high-frequency pulsation technology

Revel in a true simmer setting for soups, sauces, and more

Set it super-low for fine chocolate and other delicate foods

Install flush against counter for a clean contemporary design

Offers both True Simmer and Melt settings

Cleanup is a snap with the black ceramic glass surface



COOKTOP SPECIFICATIONS

- Unframed edge for flush installation
- Black ceramic glass surface
- Triple-zone and bridge-zone elements
- True simmer and melt settings
- 1 - 1,050/1,950/2,700 W element
- 2 - 1,200 W elements
- 1 - 2,400 W element with oval

DIMENSIONS

Technical drawing of the cooktop showing dimensions and conduit placement. The cooktop is 30" (762) wide and 21" (533) high. The drawing includes a top view and a side view. The top view shows the cooktop with four burners and a control panel. The side view shows the cooktop with a 4" (102) height and a 1 1/4" (32) depth. A conduit is shown running horizontally along the side of the cooktop, with a 7/8" (22) gap between the conduit and the cooktop body.

COUNTERTOP

↓

4 1/2" (114)

3 1/2" (89)


↑

10" (254)


E

ELECTRICAL SUPPLY
LOCATION APPLIES
ONLY TO INSTALLATION
WITH BUILT-IN OVEN

STANDARD INSTALLATION

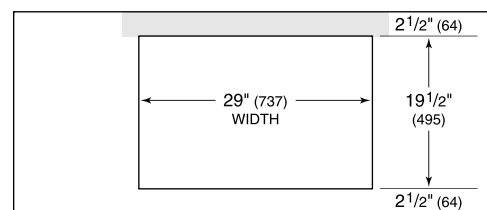

COUNTERTOP CUT-OUT

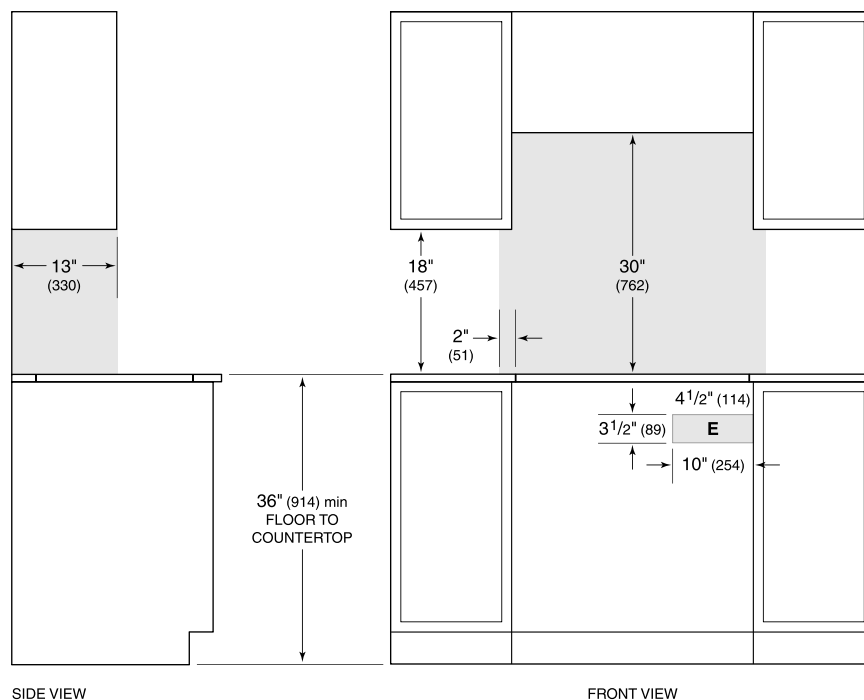

*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical supply location only applies to installations with built-in oven.*