

Café™ 30" Single Wall Oven with Advantium® Technology

CSB9120SJ



FEATURES & BENEFITS

- Speedcook oven (120V) – Enjoy oven-quality results two to four times faster than a conventional oven
- Multiple cooking functions – Expand your cooking versatility with an all-in one oven
- Halogen heat – Skip the preheating with nearly instantaneous halogen heat
- Over 175 preprogrammed menu selections – Preprogrammed selections make meals easy
- Custom recipe saver – Conveniently store cooking instructions for up to 30 different recipes
- Allows for use with JX2200/2201 storage drawer
- Under-the-counter installation flexibility

APPEARANCE

Color Appearance	Stainless Steel
Handle	Stainless Steel; Café

FEATURES

Cooking Modes	Broil; Speedcook; Convection; Microwave; Proof, Warm
Style	Built-In
Control Type	Dial; Glass Touch
Interior Oven Light	Yes
Oven Interior	Stainless Steel
Microwave Watts (IEC-705)	950
Turntable Size	16 in
Control Features	Back; Cancel/Off; Favorite Recipe; Help; Lock Controls; Options; Power Temp; Start/Pause; Timer On/Off
Cooking Technology	Advantium
Oven Rack Features	Pedestal Rack

CAPACITY

Total Capacity (cubic feet)	1.7
-----------------------------	-----

POWER / RATINGS

Electrical Input - 120V Amperage	15
Electrical Input - 120V Watts	1800
Volts/Hertz	120V; 60Hz
Broiler Wattage	1200W

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	87 lb
Cavity (W x H x D)	20-1/16 x 8-1/2 x 17 in
Net Weight	77 lb
Overall Height	18-1/8 in
Overall Width	29-3/4 in
Overall Depth	21-1/2 in
Cabinet Width	30 in

ACCESSORIES

Metal Oven Pan	Yes
----------------	-----

Café™ 30" Single Wall Oven with Advantium® Technology

CSB9120SJ

C A F É

DISTINCT BY DESIGN™

ADVANTIUM WALL OVEN/GE CAFÉ™ SERIES COOKING TOWER DIMENSIONS AND CABINET INSTALLATION INFORMATION (IN INCHES)

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: 2" minimum between cutouts when installed above warming drawer or single wall oven.


Installation Information:

Before installing, consult installation instructions packed with product for current dimensional data.



Note: Advantium wallovens can be installed below GE/GE Profile Series non-downdraft gas and electric cooktops. It CANNOT be installed below induction or Monogram (2GU3841385) gas cooktops.

Note: Advantium wall oven comes with two lower trim pieces. One is for use above 36-inch height installations and one is for use below 36-inch installations. Use of the accessory drawer will replace the bottom trim piece for applicable installations. Please see installation instructions for full details.

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least 194°F temperature rating.

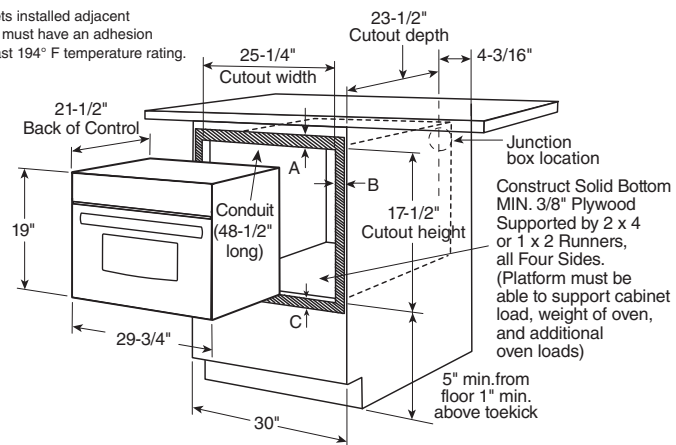

A = The unit overlap is 1/2" but allow 5/8" clearance from top edge of cutout
B = The unit overlap is 2-1/4" but allow 2-3/8" clearance from side edges of cutout
C = The unit overlap is 1" but allow 1-1/8" clearance from bottom edge of cutout

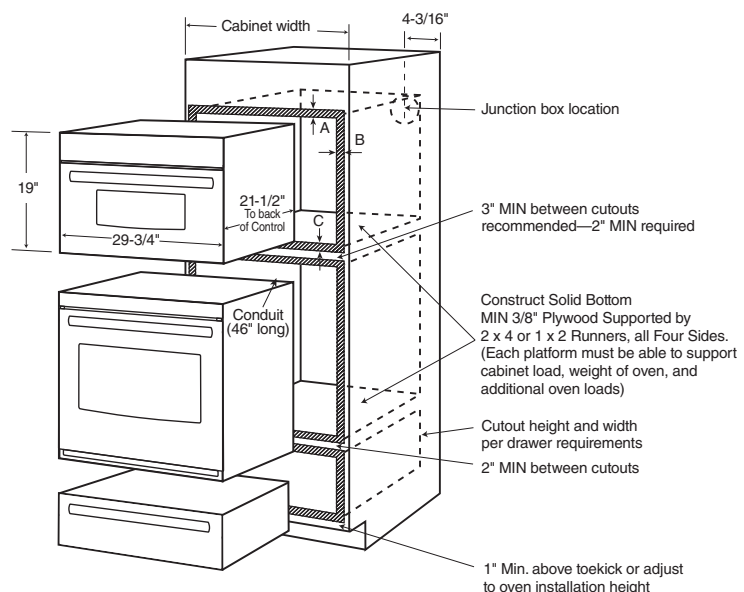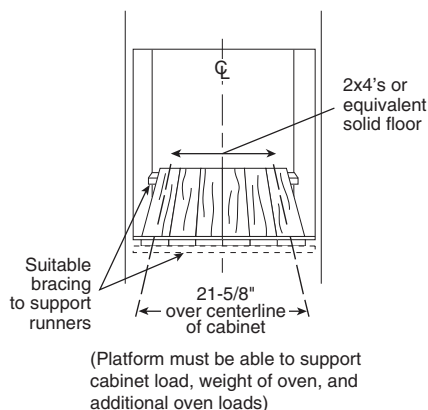

Café™ 30" Single Wall Oven with Advantium® Technology

CSB9120SJ

C A F É

DISTINCT BY DESIGN™

PREPARATION WITH AN ACCESSORY DRAWER

Prepare the opening

The Advantium 120V can be installed in combination with other Built-In appliances. Always follow each product's Installation Instructions to complete the installation.

Single Oven Installation:

Order a 30" wide single oven cabinet or cut the opening in a wall to the dimensions shown.

* For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.

- The unit overlap on the top is 1/2" but allow 5/8" clearance from top edge of cutout. The unit overlap on each side is 2-1/4" but allow 2-3/8" clearance from side edges of cutout. The unit overlap on the bottom is 5/8" but allow 3/4" clearance from bottom edge of cutout.
- Oven overlaps will conceal cut edges on all sides of the opening.

Note: PSB9120 series Advantium can be installed below GE/GE Profile non-downdraft gas and electric cooktops. It CANNOT be installed below induction or Monogram (2GU3841385) gas cooktops.

Note: PSB9120 series Advantium oven comes with two lower trim pieces. One is for use above 36-inch height installations and one is for use below 36-inch installations. Use of the accessory drawer will replace the bottom trim piece for applicable installations. Please see installation instructions for full details.

Preparation with a Warming Drawer

When installed over a single oven or a warming drawer, allow at least 2" between the two openings. This separation will provide clearance for bottom overlap of the Advantium and the other appliance overlaps.

Construct a solid oven floor of 3/8" min. thick plywood supported by 2 x 4 or 2 x 2 runners on all sides.


- The support must be level and rigidly mounted, flush with the bottom edge of the cutout.

Note: Additional clearances between the cutouts may be required.


Installation over a BUILT-IN Oven and Warming Drawer:

Note: Additional clearances between the cutouts may be required. Check to be sure the oven supports above the Warming Drawer location do not obstruct the required interior depth and height. See Warming Drawer installation instructions for details.

Caution: For personal safety, the mounting surface must be capable of supporting the cabinet load, in addition to the added weight of the oven and drawer, plus additional oven loads.

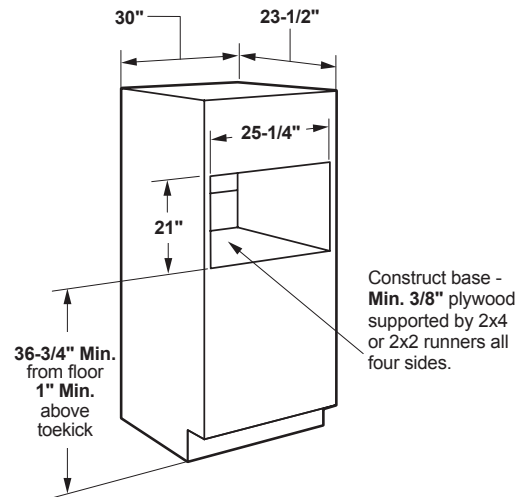

Installation over Warming Drawer:

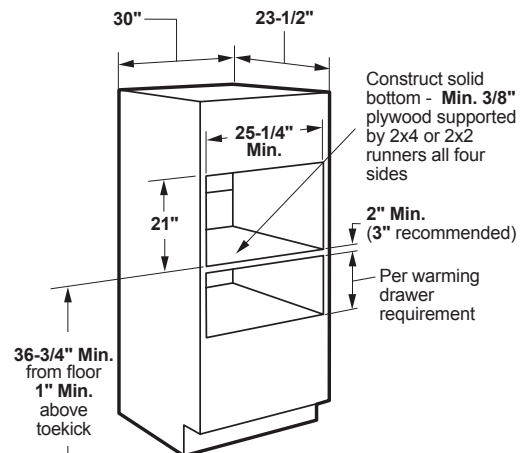

Installation over a Wall Oven and Warming Drawer:

