

DA 3466

Built-in ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



- Elegant design – slim 23 1/2 (595) in (mm) extractor canopy
- Powerful – ?? in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating


EAN: 4002515727034 / Material number: 10355910 / Old Material Number: 28346655USA

Design	
Built-in ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKF 13-P
User convenience	
Electronic controls	•
Power levels (number excl. Intensive)	3
Booster levels	1
Programmable Intensive switch-off	•
CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	1
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in Lx	320 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Exhaust air	
Maximum air throughput in cfm according to HVI	412
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	23 1/2 (595)
Canopy height in in.(mm)	1 3/8 (34)
Canopy depth in in.(mm)	10 7/8 (275)
Minimum height above electric hobs in mm	24 1/8 (610)
Net weight in lbs. (kg)	28 (12.5)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)

DA 3466

Built-in ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

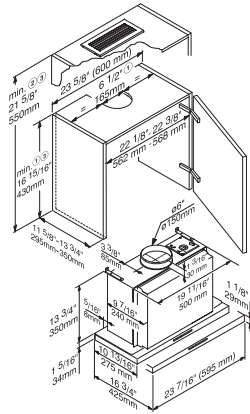

DA 3460, DA 3466 (installation drawing) VG USA

1) In extraction mode: when measuring for the height of the wall housing unit and the cut-out, account must be taken of any accessories fitted., 2) Recirculation mode requires installatiin kit DUU 151., 3) Installation with kneeling frame DAR 3000: Please attend differing cabinet height (see installation drawing DAR 3000)