

DA 3496

Built-in ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Elegant design – slim 35 1/4 (895) in (mm) extractor canopy
- Powerful – ?? in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating


EAN: 4002515689691 / Material number: 10355940 / Old Material Number: 28349655USA

Design	
Built-in ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKF 13-P
User convenience	
Electronic controls	•
Power levels (number excl. Intensive)	3
Booster levels	1
Programmable Intensive switch-off	•
CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	2
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in Lx	320 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Exhaust air	
Maximum air throughput in cfm according to HVI	412
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	35 1/4 (895)
Canopy height in in.(mm)	1 3/8 (34)
Canopy depth in in.(mm)	10 7/8 (275)
Minimum height above electric hobs in mm	24 1/8 (610)
Net weight in lbs. (kg)	32 (14.5)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)

DA 3496

Built-in ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

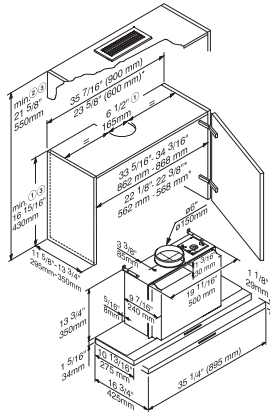

DA 3490, DA 3496 (installation drawing) VG USA

1) Extraction mode, 2) Recirculation mode with conversion kit DUU 151, 3) Installation with kneeling frame DAR 3000: Please attend differing cabinet height (see installation drawing DAR 3000), * can also be installed in a 600 mm wide unit.