

DA 3698

Built-in ventilation hood
with motorized pull-out canopy for maximum convenience.



- Unique user convenience – Con@ctivity
- Energy-efficient and uniform illumination – 3 LED ClearView Lighting
- Energy-efficient and quiet

EAN: 4002516024088 / Material number: 10876720 / Old Material Number: 28369855USA

Design	
Built-in ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKF 19-P
User convenience	
Miele@home	•
Electronic controls	•
Power levels (number excl. Intensive)	3
Run-on time 5/15 min.	•
Booster levels	1
Programmable Intensive switch-off	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Hood in Motion	•
CleanCover	•
Efficiency and sustainability	
ECO motor	•
PowerManagement system	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	2
Lighting	
LED	•
Number x W	3 x 3 W
Light intensity in lx	500 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
DC motor	•
Exhaust air	
Maximum air throughput in cfm according to HVI	412
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	35 1/8 (892)
Canopy height in in.(mm)	1 1/2 (37)
Canopy depth in in.(mm)	12 1/4 (309)
Minimum height above electric hobs in mm	24 1/8 (610)
Net weight in lbs. (kg)	42 (19.0)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15

DA 3698

Built-in ventilation hood


with motorized pull-out canopy for maximum convenience.



EAN: 4002516024088 / Material number: 10876720 / Old Material Number: 28369855USA

Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Standard accessories	
Communication module for Con@ctivity XKM 2000 DA	XKS 3000 Z

Built-in ventilation hood

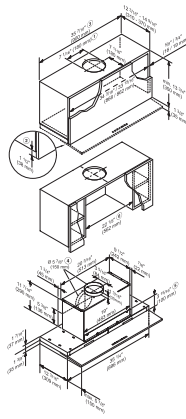

DA 3698, DA 3698 EXT (Installation drawing) – US

1. Vented, recirculation with DUU 150., 2. Housing unit carcass is 38 mm shorter than the door. This also applies to adjacent cabinets when the appliance is installed in a 600 mm wide housing unit., 3. Installation is also possible in a 60 cm wide housing unit. In this case, the door of the housing unit must open upwards (top-hinged) to enable access to grease filters. This also applies to adjacent cabinets., 4. Vent connection alternatively to the rear., 5. After the wall unit has been installed, a partition can be fitted. The slots for grease filters and odour-absorbing filters for use in recirculation mode must be accessible., 6. Alternatively, side sections can be added to the wall unit., In regard to dimensions for wall unit height and cut-outs, fitted accessories should be taken into account (e.g. silencers, XKM module).