

DA 398-7 Classic

30-inch wall-mounted ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Design – 29 1/2 (748) in (mm) wide trapezoidal canopy
- Powerful – ?? in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating

EAN: 4002515802311 / Material number: 10558810 / Old Material Number: 28398750USA

Design	
Wall ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF 12-900
User convenience	
Electronic controls	•
Power levels (number excl. Intensive)	3
Booster levels	1
Programmable Intensive switch-off	•
CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	2
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in lx	300 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Exhaust air	
Maximum air throughput in cfm according to HVI	418
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Overall hood height for vented mode and external in inches (mm)	27 3/8 (695)–40 (1015)
Overall hood height for recirculation and external in inches (mm)	32 1/2 (825)–45 1/8 (1145)
Overall min. height for vented and external in in. (mm)	27 3/8 (695)
Canopy width in in.(mm)	29 1/2 (748)
Overall max. height for vented and external in in. (mm)	40 (1015)
Canopy height in in.(mm)	4 3/4 (120)
Overall min. height for recirculation in in. (mm)	32 1/2 (825)
Canopy depth in in.(mm)	20 1/2 (520)
Overall max. height for recirculation in in. (mm)	45 1/8 (1145)
Minimum height above electric hobs in mm	24 1/8 (610)
Net weight in lbs. (kg)	56 (25.1)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1

DA 398-7 Classic

30-inch wall-mounted ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



EAN: 4002515802311 / Material number: 10558810 / Old Material Number: 28398750USA

Frequency in Hz	60
-----------------	----

Installation note

Vent connection at top	•
------------------------	---

Vent connection at top and rear	•
---------------------------------	---

Diameter of vent connection in in.(mm)	6 (150)
--	---------

Telescopic chimney	•
--------------------	---

Standard accessories

Non-return flap	•
-----------------	---


Optional accessories

OdorFree charcoal filter, can be reactivated	DKF 12-R
--	----------

DA 398-7 Classic

30-inch wall-mounted ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

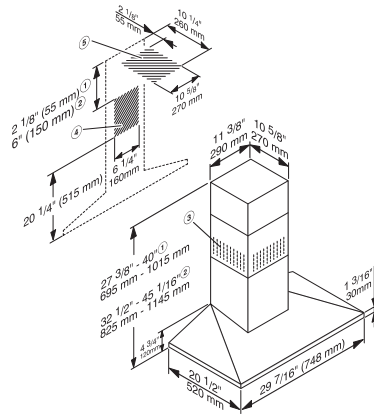

DA 398-6 (Installation drawing)

1) Extraction, 2) Recirculation, 3) Ventilation grille position at the top for recirculation, 4) and 5) Vent cut-out positions (area 5 not required for recirculation)