

## DA 6698 D Puristic Version 6000

### Island décor hood

with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful – 506.18 (860) ft<sup>3</sup>/min (m<sup>3</sup>/h) in Booster level
- Energy-efficient and quiet
- Energy-efficient and quiet

EAN: 4002516024651 / Material number: 10877210 /  
Old Material Number: 28669855USA

<b>General information</b>	
Model number	DA 6698 D Puristic Version 6000
Manufacturer material number	10877210
EAN number	4002516024651
Marketing class	Diamond
<b>Design</b>	
Island ventilation hood	•
<b>Construction type and design</b>	
Color	Stainless steel
<b>Operating modes</b>	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUI 32
OdorFree charcoal filter (order separately)	DKF 12-P
<b>User convenience</b>	
Miele@home	•
Con@ctivity	•
Electronic controls	•
Light-touch controls	•
Operation	Touch-on-glass controls
Power levels (number excl. Intensive)	3
Run-on time 5/15 min.	•
Booster levels	1
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Acoustic package	•
CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
<b>Lighting</b>	
Number x W	4 x 3 W
Light intensity in Lx	820 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
<b>Blower</b>	
Dual-action blower	•
<b>Exhaust air</b>	
Air throughput in CFM in Booster	507
Air throughput with Booster level 1 (m <sup>3</sup> /h) according to EN 61591	506.18 (860)
<b>Safety</b>	
Safety shut-off	•
Single-ply safety glass (ESG)	•
<b>Technical data</b>	
Canopy width in in.(mm)	35 3/8 (898)
Overall min. height for vented and external in in. (mm)	27 7/8 (705)
Overall max. height for vented and external in in. (mm)	39 5/8 (1005)

## DA 6698 D Puristic Version 6000

### Island décor hood

with energy-efficient LED lighting and touch controls for simple operation.




EAN: 4002516024651 / Material number: 10877210 /  
Old Material Number: 28669855USA

Canopy height in in.(mm)	3 3/8 (85)
Overall min. height for recirculation in in. (mm)	30 1/8 (765)
Canopy depth in in.(mm)	23 5/8 (598)
Overall max. height for recirculation in in. (mm)	42 3/8 (1075)
Net weight in lbs. (kg)	78 (35.0)
Hard-wired	•
Minimum height above electric cooktops in mm	24 1/8 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Plug type	Without plug
Number of phases	1
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Frequency in Hz	60
<b>Installation note</b>	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
<b>Standard accessories</b>	
Non-return flap	•

## DA 6698 D Puristic Version 6000

### Island décor hood

with energy-efficient LED lighting and touch controls for simple operation.

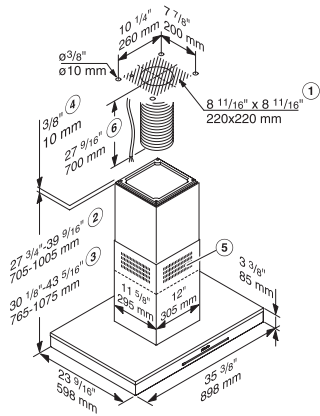

DA 6698 D, CLST (Installation drawing) – USA

- 1) Extraction cut-out, 2) Extraction, 3) Recirculation, 4) Installation option with spacer frame, 5) Ventilation grille at the top for recirculation, 6) A mains cable and, for extraction mode, flexible exhaust ducting is required from the ceiling connection to the connection on the cooker hood., ,