

DA 6996 W Pearl

Wall ventilation hood

with dimmable ambient lighting for a unique lighting mood in your kitchen.



- Design highlight – 35 1/2 (900) in (mm) wide bowed glass canopy
- Unique convenience – Con@ctivity 2.0
- Energy-efficient and uniform lighting – LED light strip
- Energy-efficient and quiet

EAN: 4002515780381 / Material number: 10418850 / Old Material Number: 28699630USA

Design	
Wall ventilation hood	•
Construction type and design	
Color	Brilliant white
Operating modes	
Recirculated mode	Can be retrofitted
Design	
Edge extraction	•
User convenience	
Automatic function	Con@ctivity 2.0
Electronic controls	•
Power levels (number excl. Intensive)	3
Run-on time 5/15 min.	•
Booster levels	1
Programmable Intensive switch-off	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	1
Lighting	
LED	•
Number x W	1x9,7 W / 1x12,8 W
Light intensity in Lx	600 lx
Color temperature in K	3000 Kelvin
Light dimmer function	•
Ambient lighting white	•
Blower	
Dual-action blower	•
AC motor	•
Exhaust air	
Air throughput	Values upon request
Safety	
Safety shut-off	•
Single-ply safety glass (ESG)	•
Technical data	
Overall hood height for vented mode and external in inches (mm)	23 (583)
Overall hood height for recirculation and external in inches (mm)	23 (583)
Overall min. height for vented and external in in. (mm)	23 (583)
Canopy width in in.(mm)	35 1/2 (900)
Overall max. height for vented and external in in. (mm)	23 (583)
Canopy height in in.(mm)	23 (583)
Overall min. height for recirculation in in. (mm)	23 (583)
Canopy depth in in.(mm)	21 1/4 (537)
Overall max. height for recirculation in in. (mm)	23 (583)
Net weight in lbs. (kg)	62 (28.0)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•

DA 6996 W Pearl

Wall ventilation hood

with dimmable ambient lighting for a unique lighting mood in your kitchen.




EAN: 4002515780381 / Material number: 10418850 / Old Material Number: 28699630USA

Hard-wired	•
Total connected load in kW	0.37
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Standard accessories	
Reducer from 150 to 125 mm Ø	•
Communication module for Con@ctivity XKM 2000 DA	XKS 3000 Z
Non-return flap	•
Optional accessories	
OdorFree charcoal filter, can be reactivated	DKF 25-R
Duct Cover	DADC 6000

DA 6996 W Pearl

Wall ventilation hood

with dimmable ambient lighting for a unique lighting mood in your kitchen.

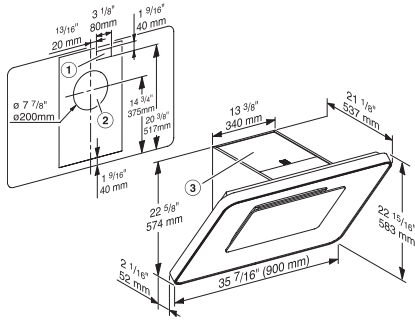

DA 6998 W (Installation drawing) – USA

1) Cut-out for cooker hoods with hard-wired connection rather than a plug., 2) Opening for ducting connection at the back. Vent Connection alternatively to the top., 3) Ventilation grille positioned at the top for recirculation. A distance of at least 200 mm must be maintained between the top of the appliance and the ceiling or any furniture units installed above the appliance.