

DAC 2247 Stella  
Ceiling extractor  
in compact design in 45 7/8 (1165) in (mm) width



- Suitable for every home – vented or recirculating
- Convenient operation – with Con@ctivity and remote control included
- Powerful – 473.81 (805) ft<sup>3</sup>/min (m<sup>3</sup>/h) in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Panel can be customized

EAN: 4002516805946 / Material number: 12565890 /  
Old Material Number: 28C2247SUSA

<b>General information</b>	
Model number	DAC 2247 Stella
Manufacturer material number	12565890
EAN number	4002516805946
Marketing class	Gold
<b>Design</b>	
Ceiling fan	•
<b>Construction type and design</b>	
Color	Stainless steel
<b>Operating modes</b>	
Recirculated mode	Can be retrofitted
OdorFree charcoal filter (order separately)	DKF 40-R
<b>Design</b>	
Edge extraction	•
<b>User convenience</b>	
Miele@home	•
Electronic controls	•
EasySwitch	•
ON/OFF switch	•
Power levels (number excl. Intensive)	3
Run-on time 5/15 min.	•
Booster levels	1
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
CleanCover	•
<b>Efficiency and sustainability</b>	
ECO motor (DC motor)	•
PowerManagement system	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	4
<b>Lighting</b>	
Number x W	2 x 7,2 W
Light intensity in Lx	450 lx
Color temperature in K	3500 Kelvin
<b>Blower</b>	
Dual-action blower	•
<b>Exhaust air</b>	
Air throughput in CFM in Booster	474
Air throughput with Booster level 1 (m <sup>3</sup> /h) according to EN 61591	473.81 (805)
<b>Safety</b>	
Safety shut-off	•
<b>Technical data</b>	
Canopy width in in.(mm)	45 7/8 (1165)
Overall min. height for vented and external in in. (mm)	11 3/4 (296)
Overall max. height for vented and external in in. (mm)	11 3/4 (296)
Canopy height in in.(mm)	11 3/4 (296)


DAC 2247 Stella  
Ceiling extractor  
in compact design in 45 7/8 (1165) in (mm) width



EAN: 4002516805946 / Material number: 12565890 /  
Old Material Number: 28C2247SUSA

Overall min. height for recirculation in in. (mm)	11 3/4 (296)
Canopy depth in in.(mm)	19 3/4 (500)
Overall max. height for recirculation in in. (mm)	11 3/4 (296)
Net weight in lbs. (kg)	50 (22.3)
Length of electrical wire in ft (m)	2 (0.7)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 1/8 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Plug type	NEMA plug: 5-15
Number of phases	1
Total connected load in kW	0.19
Voltage in V	120
Fuse rating in A	15
Frequency in Hz	60
<b>Installation note</b>	
Vent connection on side	•
Diameter of vent connection in in.(mm)	6 (150)
<b>Standard accessories</b>	
Non-return flap	•
Reducer from 150 to 125 mm Ø	•
Remote control	•

DAC 2247 Stella  
Ceiling extractor  
in compact design in 45 7/8 (1165) in (mm) width

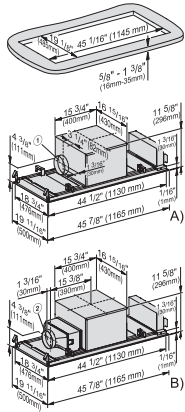

DAC2247, Installation drawings

A) Exhaust air mode, B) Recirculation mode with integrated odour filter, 1) Exhaust air connection  $\varnothing$  150 mm, The connection piece is on the left-hand side ex works., -The housing can be rotated by 90 degrees for exhaust air routing to the front or rear. To allow the housing to be rotated, there must be a free space of 100 mm in the ceiling in front of and behind the ceiling cut-out., -For an exhaust air duct to the right, the extractor bonnet must be installed rotated by 180 degrees., 2) Spigot  $\varnothing$  150 mm as air outlet in Plug&Play mode or for connecting an air duct in ducted recirculation mode. The connection piece is on the left-hand side ex works., -It is not possible to convert the spigot to the front or rear., -For an exhaust air duct to the right, the cooker bonnet must be installed rotated by 180 degrees.