

DAS 2920

Built-in ventilation hood
with EasySwitch controls for convenient operation



- Classic design – stainless-steel panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495857 / Material number: 11878500 /
Old Material Number: 28S2920SUSA

General information	
Model number	DAS 2920
Manufacturer material number	11878500
EAN number	4002516495857
Marketing class	Silver
Design	
Built-in ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
OdorFree charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
User convenience	
Electronic controls	•
EasySwitch	•
Booster levels	1
CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3,0 W
Light intensity in lx	300 lx
Color temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	498
Air throughput with Booster level 1 (m ³ /h) according to EN 61591	497.35 (845)
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	35 3/8 (896)
Canopy height in in.(mm)	1 1/2 (36)
Canopy depth in in.(mm)	10 3/4 (273)
Net weight in lbs. (kg)	36 (16.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum height above electric cooktops in mm	24 1/8 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Plug type	NEMA plug: 5-15
Number of phases	1
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15

DAS 2920
Built-in ventilation hood
with EasySwitch controls for convenient operation



EAN: 4002516495857 / Material number: 11878500 /
Old Material Number: 28S2920SUSA

Frequency in Hz 60

Installation note

Vent connection at top


•

Standard accessories

Non-return flap

•

DAS 2920
 Built-in ventilation hood
 with EasySwitch controls for convenient operation

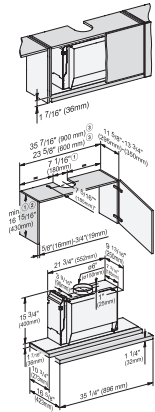

DAS2920, DAS4920, drawing – US

- 1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts.
 - 2) Exhaust air, recirculation with DUU 150 conversion kit.
 - 3) Installation is also possible in a 600 mm wide cabinet.
- *In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear (e.g. when using a front panel), the dimensions must be adjusted accordingly.