

## DAS 4720

Built-in ventilation hood

for installation in narrow upper cabinets with EasySwitch controls



- Classic design – stainless-steel panel, 30" wide
- Unique user convenience – Con@ctivity
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495925 / Material number: 11878520 /  
Old Material Number: 28S4720SUSA

<b>General information</b>	
Model number	DAS 4720
Manufacturer material number	11878520
EAN number	4002516495925
Marketing class	Gold
<b>Design</b>	
Built-in ventilation hood	•
<b>Construction type and design</b>	
Color	Stainless steel
<b>Operating modes</b>	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
OdorFree charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
<b>User convenience</b>	
Miele@home	•
Automatic function	Con@ctivity 3.0
Con@ctivity	•
Electronic controls	•
EasySwitch	•
Run-on time 5/15 min.	•
Booster levels	1
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
<b>Lighting</b>	
Number x W	1 x 3 W
Light intensity in lx	330 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
<b>Blower</b>	
Dual-action blower	•
<b>Exhaust air</b>	
Air throughput in CFM in Booster	498
Air throughput with Booster level 1 (m <sup>3</sup> /h) according to EN 61591	497.35 (845)
<b>Safety</b>	
Safety shut-off	•
<b>Technical data</b>	
Canopy width in in.(mm)	29 7/8 (758)
Canopy height in in.(mm)	1 1/2 (36)
Canopy depth in in.(mm)	10 3/4 (273)
Net weight in lbs. (kg)	36 (16.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•

DAS 4720

Built-in ventilation hood

for installation in narrow upper cabinets with EasySwitch controls




EAN: 4002516495925 / Material number: 11878520 /  
Old Material Number: 28S4720SUSA

Minimum height above electric cooktops in mm	24 1/8 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Plug type	NEMA plug: 5-15
Number of phases	1
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Frequency in Hz	60
<b>Installation note</b>	
Vent connection at top	•
<b>Standard accessories</b>	
Non-return flap	•

## DAS 4720

Built-in ventilation hood

for installation in narrow upper cabinets with EasySwitch controls

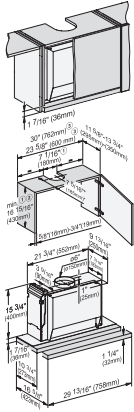

DAS4720 US, Installation drawings, VG USA

☐ Extraction mode: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted., ☐ Recirculation with recirculation conversion kit., ☐ Installation is also possible in a 600 mm wide unit., \* In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly.