




GE Appliances

DCD330GYAC/ WC - GE Commercial Front Loading Gas Dryer

Dryer Dimensions (in inches)

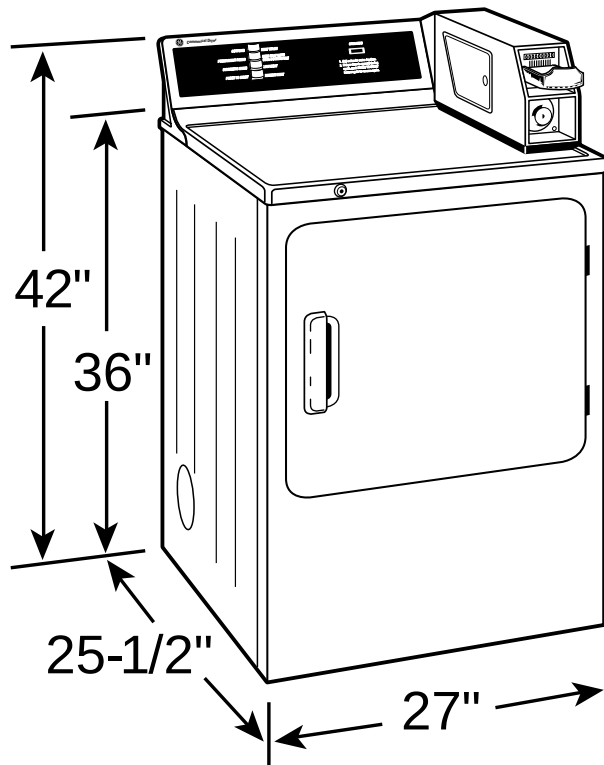

Exhaust Options: Shipped with exhaust to the rear.

Gas model offers 3-way venting: left, bottom or rear. Maximum recommended exhaust duct length is 15 feet of 4" rigid ducting with two 90° elbows and dampered wall cap. (See Installation Instructions)

Requirements:

Gas—120/240 Volts, 60 Hertz. An individual branch circuit fused for 15- or 20-amps is required for each dryer. Gas rate input, 22000 BTU/Hr. Factory equipped for natural gas. Tested for LP gas. A conversion kit is required for LP gas. Check installation instructions for correct kit number. Have a qualified technician install the conversion kit. Equipped with energy saving Glo-Bar ignition. Automatic heat-sensor shuts off gas supply if gas or electricity is interrupted. Automatic pressure regulator compensates for variations in gas pressure. (natural gas only)

Dryer Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Installation Information: For complete installation information see installation instructions packed with product.

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Listed by
Underwriters
Laboratories



GE Appliances

DCD330GYAC/ WC - GE Commercial Front Loading Gas Dryer

Dryer Exhausting Information—Use Metal Duct Only

Domestic Dryer Models	Number of 90° Turns	Best Performance		Maximum Length of 4" Dia. Rigid Metal Duct		Maximum Length of 4" Dia. Flexible Metal Duct	
		Exhaust Hood Type		Exhaust Hood Type		Exhaust Hood Type	
		A 4" Opening	B 2-1/2" Opening	A 4" Opening	B 2-1/2" Opening	A 4" Opening	B 2-1/2" Opening
Super & Extra-Large 6.0 Capacity Models All Electric Dryers	0	90 ft.	60 ft.	55 ft.	45 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.	40 ft.	30 ft.
	2	45 ft.	35 ft.	30 ft.	20 ft.	30 ft.	20 ft.
	3	35 ft.	25 ft.	20 ft.	15 ft.	20 ft.	15 ft.
Super & Extra-Large 6.0 Capacity Models All Gas Dryers	0	45 ft.	30 ft.	30 ft.	15 ft.	30 ft.	15 ft.
	1	35 ft.	20 ft.	20 ft.	10 ft.	20 ft.	10 ft.
	2	25 ft.	10 ft.	10 ft.	—	10 ft.	—
	3	15 ft.	—	—	—	—	—
Extra-Large 5.7 Capacity Electric and Gas Dryers	0	60 ft.	48 ft.	30 ft.	18 ft.	30 ft.	18 ft.
	1	52 ft.	40 ft.	22 ft.	14 ft.	22 ft.	14 ft.
	2	44 ft.	32 ft.	14 ft.	10 ft.	14 ft.	10 ft.
	3	32 ft.	24 ft.	—	—	—	—
	4	28 ft.	16 ft.	—	—	—	—

Special Installation Requirements

Alcove or Closet Installation:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer **MUST** be exhausted to the outside.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:
0" either side
3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- The closet should be vented to the outdoors to prevent gas pocketing in case of a gas leak in the supply line.
- No other fuel-burning appliance shall be installed in the same closet with the dryer.

Bathroom or Bedroom Installation:

- The dryer **MUST** be exhausted to the outdoors.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

Minimum Clearances other than Alcove or Closet Installation:

- Minimum clearances to combustible surfaces
0" both sides
3" rear

Specification Created 7/01

For complete information, see installation instructions packed with your dryer.

Important Note:

GE Kit Number WE14X70 needed when converting rear exhaust to bottom or side. (On large capacity models.)

Ducting Materials:

For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If "all rigid metal" duct cannot be used, then "flexible all metal" venting can be used, but it will reduce the maximum recommended duct length.

Exhaust Length Calculation:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4' rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. The maximum length for flexible ducts are less than for rigid duct.

A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.

Exhausting the dryer to the outside is strongly recommended to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet **must** be exhausted to the outside.

Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed Down.

Other terminations, such as louvered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.




Listed by
Underwriters
Laboratories



GE Appliances

DCD330GYAC/ WC - GE Commercial Front Loading Gas Dryer

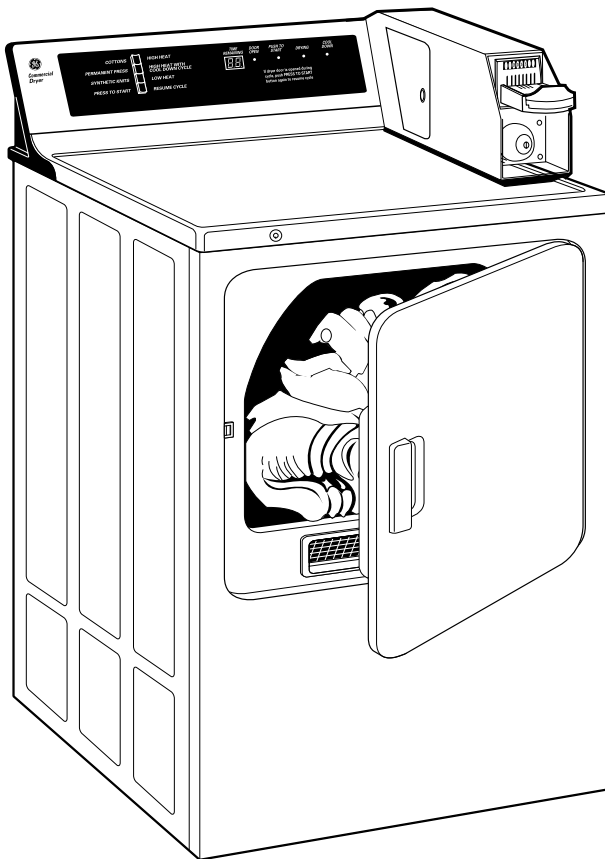

Features and Benefits

- Extra-Large 5.7 cu. ft. Capacity
- LED Cycle Countdown
- Automatic Dry Control
- 3 Cycles:
 - Cottons; Permanent Press; Synthetic Knits
- 3 Heat Selections
- Up-Front Lint Filter
- Reverse-A-Door
- 100% Front Serviceable
- Porcelain Drum Interior
- Model DCD330EYWC - White
- Model DCD330EYAC - Almond
- Model DCD330GYWC - White
- Model DCD330GYAC - Almond