

ESW 7010 AM

Handleless Gourmet warming drawer, 24" width and 5 5/8" height for preheating dishware, keeping food warm, and Slow Roasting.



- The ultimate in enjoyment – Slow Roasting
- Always at the right temperature – 4 operating modes
- Convenient and easy – Touch control and Miele@home
- Push2open – opening the drawer couldn't be easier
- Better safe than sorry – timer with automatic switch-off

EAN: 4002516487319 / Material number: 11794740 /
Old Material Number: 30701030USA

General information	
Model number	ESW 7010 AM
Manufacturer material number	11794740
EAN number	4002516487319
Construction type and design	
Gourmet drawer	•
VitroLine	•
ArtLine	•
No Handles	•
Construction type and design	
Color	Graphite grey
Operating modes	
Warm cups	•
Warm plates	•
Keeping food warm	•
Slow roast	•
Convenience features	
Prewarming of dishware	•
Keeping food warm	•
Perfect cooking results at low temperatures	•
User convenience	
Miele@home	•
Push2open mechanism	•
Fully telescopic runners for easy loading and unloading	•
Control panel with sensor control	•
Timer function	•
Sabbath program	•
Control panel with text	•
Stop programming	•
Cleaning convenience	
Flush control panel	•
Safety	
Cool front	•
Anti-slip mat	•
Safety cut-out	•
Accessory drawer	
Capacity	6 place settings
Technical data	
Temperature in °F (°C)	105-185 (40-85)
Appliance width in in. (mm)	23 3/8 (595)
Appliance height in in. (mm)	5 1/2 (141)
Appliance depth in in. (mm)	22 1/2 (570)
Useable interior height in in. (mm)	3 1/4 (80)
Plug type	NEMA plug: 5-15
Total connected load in kW	0.70
Voltage in V	120
Frequency in Hz	60
Fuse rating in A	16

ESW 7010 AM


Handleless Gourmet warming drawer, 24" width and 5 5/8" height
for preheating dishware, keeping food warm, and Slow Roasting.

EAN: 4002516487319 / Material number: 11794740 /
Old Material Number: 30701030USA

Number of phases	1
Connection wire with plug	•
Wire length in ft. (m)	6 (2.0)
Standard accessories	
Non-slip liner	1


ESW 7010 AM

Handleless Gourmet warming drawer, 24" width and 5 5/8" height for preheating dishware, keeping food warm, and Slow Roasting.

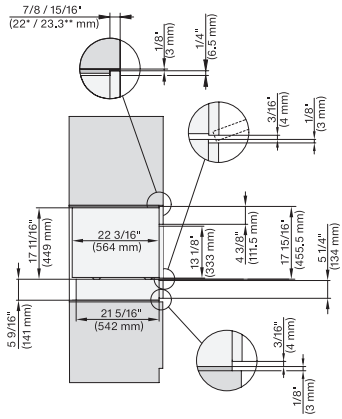


side view, Flush inset, DGC combi XL, ESW

7/8" – 22* mm – Glass, 15/16" – 23.3** mm – Stainless steel, DGC: Minimum installation height 36" – 914 mm from floor to the device installation surface

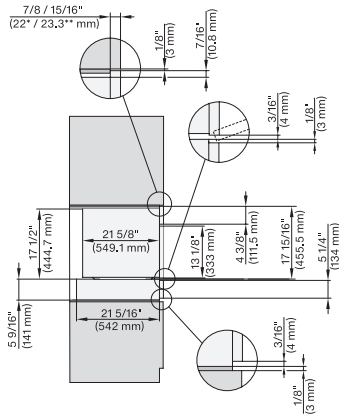


side view, Flush inset, combi, 450S, ESW

7/8" – 22* mm – Glass, 15/16" – 23.3** mm – Stainless steel

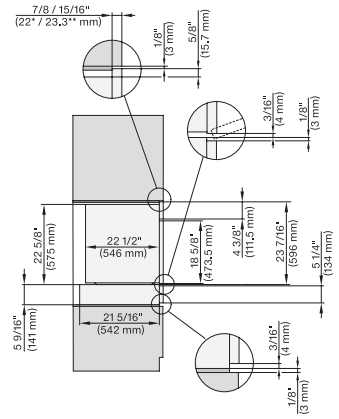


side view, Flush inset, combi, 650S, ESW

7/8" – 22* mm – Glass, 15/16" – 23.3** mm – Stainless steel

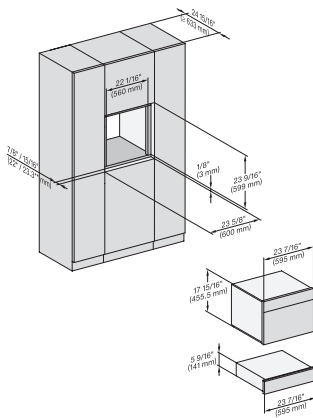


Einbau, Flush inset, combi, 450S, ESW

7/8" – 22* mm – Glass, 15/16" – 23.3** mm – Stainless steel, DGC: Minimum installation height 36" – 914 mm from floor to the device installation surface

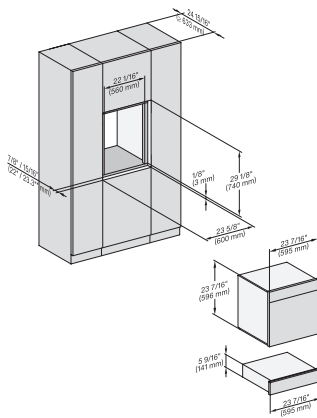


Installation Flush inset, combi, 650S, ESW

7/8" – 22* mm – Glass, 15/16" – 23.3** mm – Stainless steel

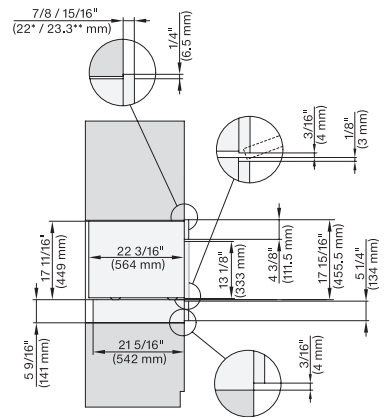


side view, Proud, combi, DGC XL ESW

7/8" – 22* mm – Glass, 15/16" – 23.3** mm – Stainless steel, DGC: Minimum installation height 36" – 914 mm from floor to the device installation surface

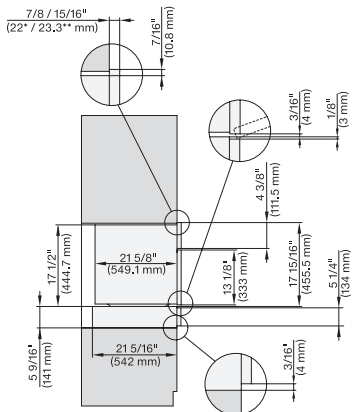


side view, Proud, combi, 450S ESW

7/8" – 22* mm – Glass, 15/16" – 23.3** mm – Stainless steel

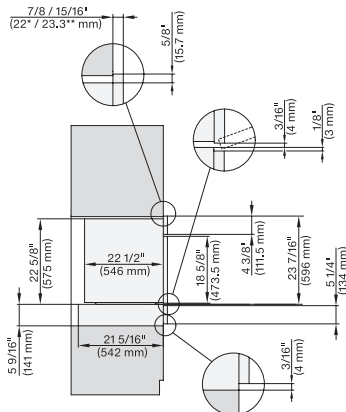

side view, Proud, combi, 650S, ESW

7/8" – 22* mm – Glass, 15/16" – 23.3** mm – Stainless steel

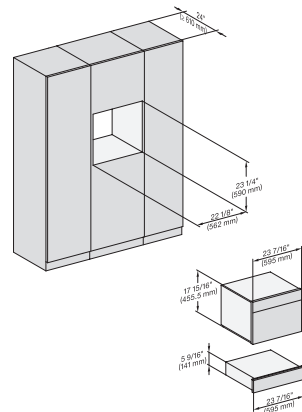


Installation Proud, combi, 450S ESW

DGC: Minimum installation height 36" – 914 mm from floor to the device installation surface

ESW 7010 AM

Handleless Gourmet warming drawer, 24" width and 5 5/8" height for preheating dishware, keeping food warm, and Slow Roasting.

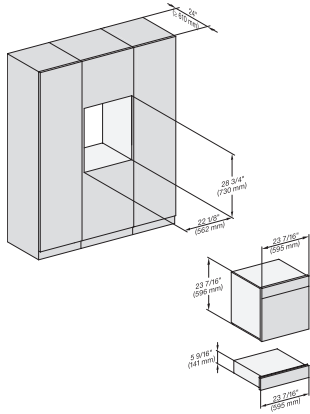

Installation Proud, combi, 650S ESW