

Version FISAB28B3SS-1 / Built-in 28" (70 cm) - 280 CFM
Collection Built-in

FEATURES AND PROPERTIES

Materials/Finishes Scotch brite stainless steel
Control Slider
Ducting type Extracting/Filtering
Installation type Insert
Lighting Led 2x1,2 W - 3200 K
Filters Metallic grease filter, removable and washable
 Charcoal filter (optional)

Ducting type
Dimensions 28 in
Minimum Electric hob distance 21 in
Minimum Gas hob distance 25 in
Notes Cut-out size 10 5/16" (262) x 19 5/16" (506);
 Recommended mounting height from cooking surface to hood bottom: 24" - 36"



Photograph is for information purposes only. May not correspond to the selected version

ELECTRICAL CONNECTION AND CONSUMPTION


Maximum consumption 150 W
Voltage/Frequency 110-120V 60Hz
Connection type Hood comes standard with Nema 5-15P power cord

BLOWER PERFORMANCE

Motor 280 CFM
Minimum sound level
Maximum sound level 49 dB (A)re1pW I.E.C. 60704-2-13

WEIGHTS AND DIMENSIONS

Gross weight 22 lbs
Net weight 14 lbs
Volume 4 ft
Packaging dimensions L 32 x H 16 x D16 in

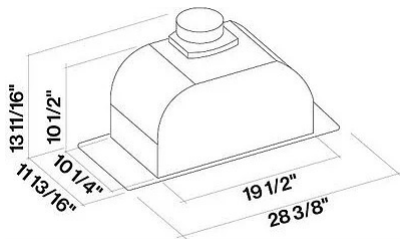

OPTIONAL ACCESSORIES

<i>Code</i>	<i>Description</i>
KACL.815	Protective cleaning cloths for stainless steel (box 10 pcs)
103050102	FFCHAR2C0BL - Round charcoal filter Ø212 mm - Type 2

ENGINE SPECIFICATIONS

Motor speed

Noise dB(A) re1pW I.E.C. 60704-2-13

Capacity

Maximum pressure (Pa)

Motor power (W)

Air outlet

CAPACITY / PRESSURE

TECNICAL SPECS OF COOKERHOOD WITH 450 M3/H (280 CFM) MOTOR

Motor Speed	1	2	3
Noise dB(A) re 1pW - I.E.C. 60704-2-13	41	51	60
Noise (sones) re 1pW - I.E.C. 60704-2-14	2,46	4,93	9,2
Capacity m3/h Normalized piping IEC 61591	141	202	317
Capacity CFM Normalized piping IEC 61591	83	119	186
Capacity m3/h at 0 Pa	144	208	327
Capacity CFM at 0 Pa	85	122	192
Pressure max (Pa)	90	180	370
Motor power (W)	45	60	125
Air outlet	120	120	120