

**Version** FOPYR48W12OS / Wall 48" (120 cm) - 1200 CFM  
**Collection** Outdoor

**FEATURES AND PROPERTIES**

**Materials/Finishes** Scotch brite stainless steel (AISI 304)  
**Control** Knob control  
**Ducting type** Extracting/Filtering  
**Chimney** Optional Chimney  
**Installation type** Wall  
**Lighting** LED Strip (3000K)  
**Filters** Professional Baffle Filters  
**Ducting type**  
**Dimensions** 48 in



Photograph is for information purposes only. May not correspond to the selected version

**ELECTRICAL CONNECTION AND CONSUMPTION**



**Maximum consumption** 680 W  
**Voltage/Frequency** 110-120V 60Hz

**BLOWER PERFORMANCE**


**Motor** 2x600 CFM  
**Minimum sound level** 0 dB (A)re1pW I.E.C. 60704-2-13  
**Maximum sound level** 0 dB (A)re1pW I.E.C. 60704-2-13

**WEIGHTS AND DIMENSIONS**

**Gross weight** 124 lbs  
**Net weight** 108 lbs  
**Volume** 31 ft  
**Packaging dimensions** L 53 x H 36 x D29 in

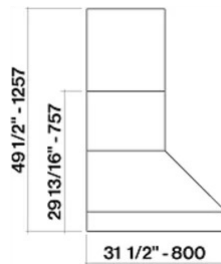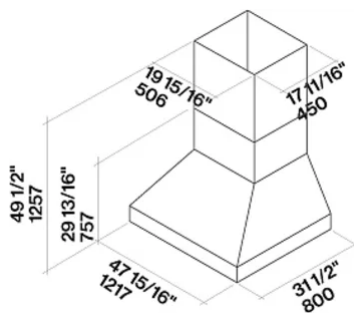

Lateral view

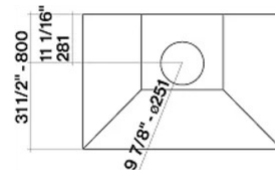

Top view