

GCWN2800D

GE® 3.8 DOE cu. ft. stainless steel capacity washer

Dimensions and Installation Information (in inches)

Circuit Requirements: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required.

Electrical Rating:


120V, 60Hz

Washer Note:

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

Installation Information:

Before installing, consult installation instructions packed with your washer.

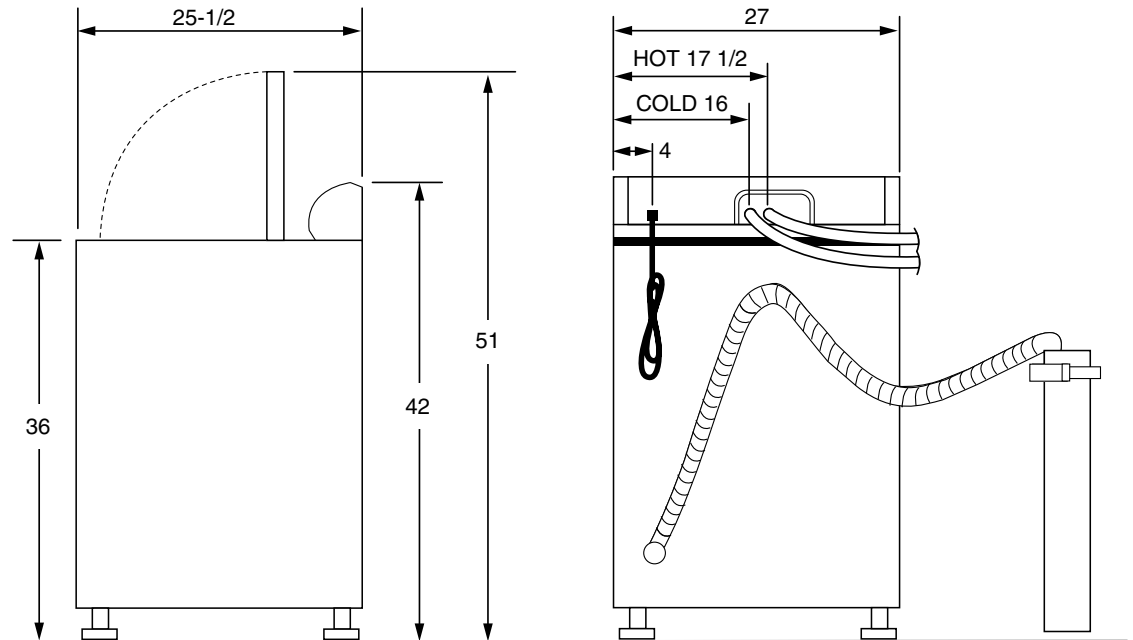

Side View

Rear View

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



imagination at work



Listed by
Underwriters
Laboratories

Specification Revised 2/15


360114

GCWN2800D

GE® 3.8 DOE cu. ft. stainless steel capacity washer

Features and Benefits

- Dual-Action agitator provides gentle, dual-wash action
- Rotary electromechanical controls make it simple to set cycles
- 13 wash cycles handle various fabrics and soils
- 5 water levels—select water level based on load size
- Bleach and fabric softener dispensers automatically operate with wash cycle
- Power Rinse - Optional deep rinse cycle ensures clothes are rinsed of soap residue and fabric softener
- 630-RPM spin speed—fast spin speeds remove water efficiently and minimize dry times
- Model GCWN2800DWS – White

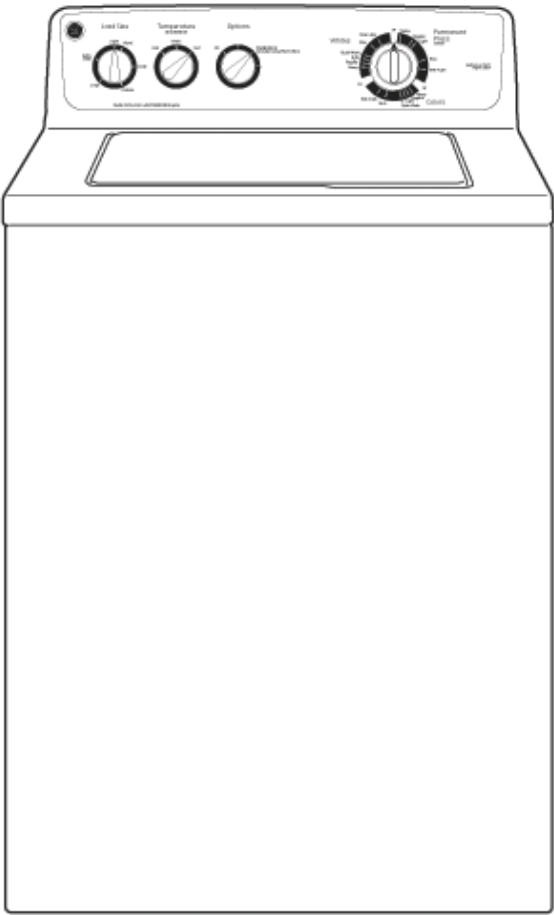

Modified Energy Factor (iMEF)*	8.4
Water Factor (iWF)*	1.29

*Certified by 10CFR-430 appendix J1