

GR304



FEATURES

- Control temperature precisely with four dual-stacked, sealed gas burners for higher highs, lower lows
- Enjoy quicker heat and more even cooking with this large capacity gas convection oven
- Produce crisper crusts and faster sears with the powerful infrared interior broiler
- Re-ignites flame automatically with our spark ignition system for improved temperature control and added safety
- Move pots and pans easily across continuous cast-iron grates
- Clean up sloshes and spills easily with the seamless, sealed, black porcelain-coated burner pans
- Find your kitchen style with a choice of iconic red, black, or brushed stainless control knobs

ACCESSORIES

- 2-Burner Wok Grate
- 2-Burner Wok Grate
- Bake Stone Kit
- Filler Trim (2-pc)
- Front Leg Covers
- Full-Extension Ball Bearing Rack
- Stainless Steel Kickplate
- Brushed stainless, brass or chrome bezels
- High altitude conversion kits available
- Signature red, black or brushed stainless control knobs
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



KNOB OPTIONS



TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 3 - 15,000 Btu burners


OVEN INTERIOR SPECIFICATIONS

- 30,000 Btu oven burner
- 18,000 Btu oven broiler


## PRODUCT SPECIFICATIONS

|                            |                            |
|----------------------------|----------------------------|
| Model                      | GR304                      |
| Dimensions                 | 29 7/8"W x 37"H x 28 3/8"D |
| Oven 1 Interior Dimensions | 24"W x 18 5/8"H x 17"D     |
| Oven 1 Usable Capacity     | 2.5 cu. ft.                |
| Oven 1 Overall Capacity    | 4.4 cu. ft.                |
| Door Clearance             | 19 1/2"                    |
| Weight                     | 413 lbs                    |
| Electrical Supply          | 110/120 VAC, 50/60 Hz      |
| Electrical Service         | 15 amp dedicated circuit   |
| Gas Supply                 | 3/4" ID line               |
| Gas Inlet                  | 1/2" NPT female            |
| Receptacle                 | 3-prong grounding-type     |

## ELECTRICAL




## GAS




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

## DIMENSIONS

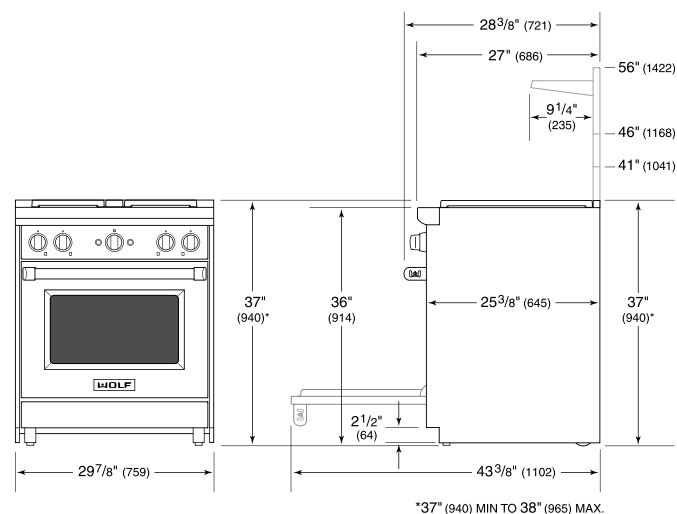

## STANDARD INSTALLATION

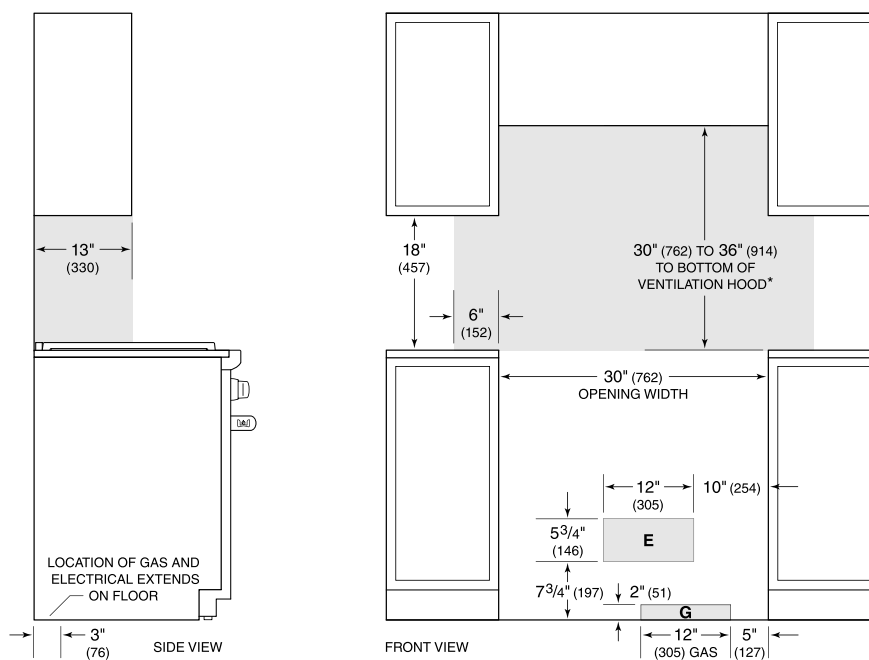

*\*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.*

**NOTE:** Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

*For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.*