

GR364G



FEATURES

- Control temperature precisely with four dual-stacked, sealed gas burners for higher highs, lower lows
- Rely on a 15,000 Btu infrared griddle to sear burgers, stir-fry vegetables, and more
- Enjoy quicker heat and more even cooking with this large capacity gas convection oven
- Clean up splashes and spills easily with the seamless, sealed, black porcelain-coated burner pans
- Produce crisper crusts and faster sears with the powerful infrared interior broiler
- Re-ignites flame automatically with our spark ignition system for improved temperature control and added safety
- Move pots and pans easily across continuous cast-iron grates
- Find your kitchen style with a choice of iconic red, black, or brushed stainless control knobs

ACCESSORIES

- 11" Cutting Board
- 2-Burner Wok Grate
- 2-Burner Wok Grate
- Bake Stone Kit
- Filler Trim
- Front Leg Covers
- Full-Extension Ball Bearing Rack
- Griddle Cleaning Kit
- Griddle Cleaning Pads
- Griddle Cleaning Solution
- Stainless Steel Kickplate
- Brushed stainless, brass or chrome bezels
- High altitude conversion kits available
- Signature red, black or brushed stainless control knobs
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

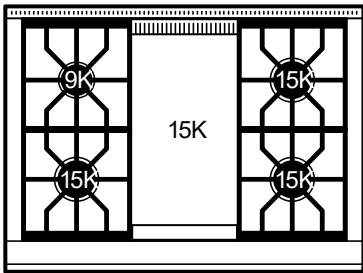

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 3 - 15,000 Btu burners
- 1 - 15,000 Btu griddle

OVEN INTERIOR SPECIFICATIONS


- 30,000 Btu oven burner
- 18,000 Btu oven broiler



PRODUCT SPECIFICATIONS


Model	GR364G
Dimensions	35 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	30"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	3.7 cu. ft.
Oven 1 Overall Capacity	5.5 cu. ft.
Door Clearance	19 1/2"
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type

DIMENSIONS

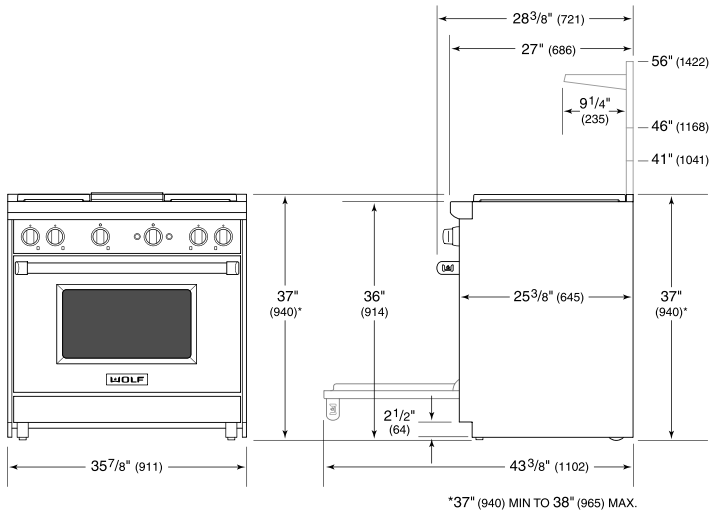


ELECTRICAL

GAS

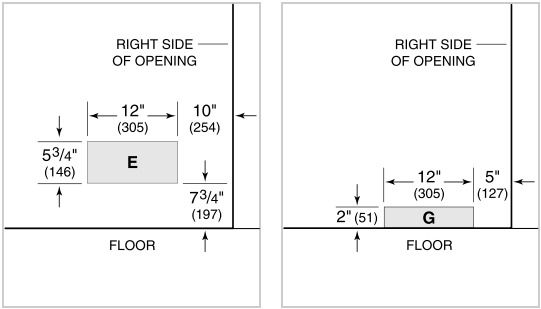

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

STANDARD INSTALLATION

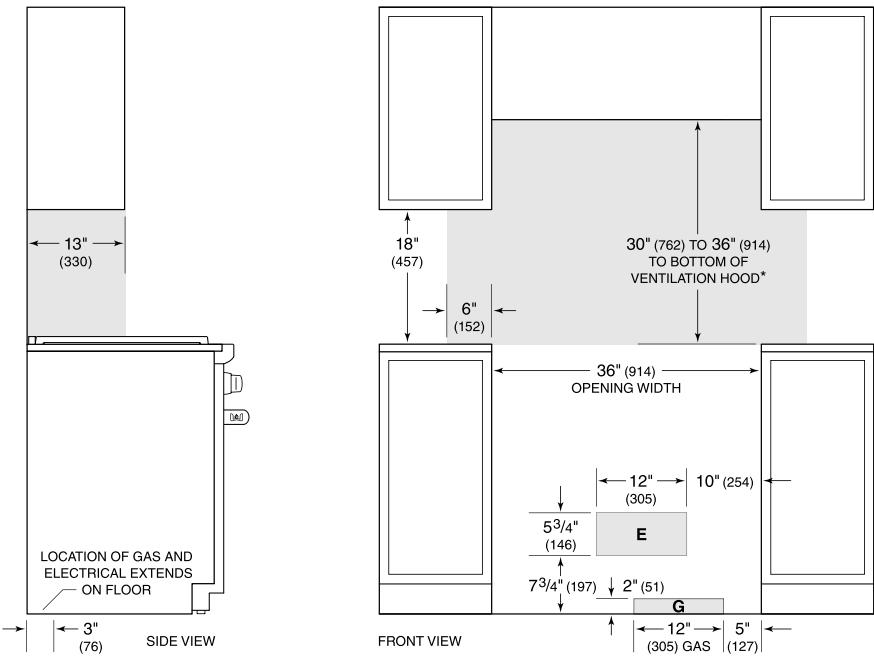

*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.