

GE PROFILE™ AND GE® BUILT-IN COOKTOPS

GE provides cooking inspiration through innovation.



We bring good things to life.

Built-In Electric Cooktops

GE Profile™ and GE® electric cooktops cater to every cooking need and style.



Electronic Touch-Control Cooktop

GE's latest electric cooktop offers a modern, understated look that's exceptionally easy to clean. Distinguished by a smooth, continuous surface with touch controls, this cooktop makes a sleek impression in any kitchen design.

The touch-control cooktop features an array of convenient extras, including a bridge element that connects the left front and rear elements, an energy-saving dual element that combines a 6" and 9" element all in one and a warming element that provides even, low-heat capability for delicate foods.



CleanDesign Electric Cooktop

The manual-control cooktop is made to perform beautifully. The ribbon elements are rendered nearly invisible beneath the ceramic-glass surface, and a unique textured pattern adds visual interest. The control knobs are closely arranged according to element location, making operation simple. The cooktop not only provides ease of use, but it's also designed for ultimate cleanability. There's no place for spills to hide, so cleanup is a snap. All your culinary energies can go toward cooking, not cleaning.



Electronic touch controls

The electronic control panel is innovatively styled with soft touch pads, a digital kitchen timer, and clean, easy-to-read graphics. A lockout option helps prevent unwanted operation.




Expandable heating elements

GE electric cooktops deliver an impressive lineup of performance capabilities. Among these is a bridge element that uses one to two elements to create an elongated cooking area.



Ease of cleaning

The frameless CleanDesign cooktop is virtually free of spill-catching crevices, making cleanup simple. And the ceramic-glass surface resists fingerprints and scratches.

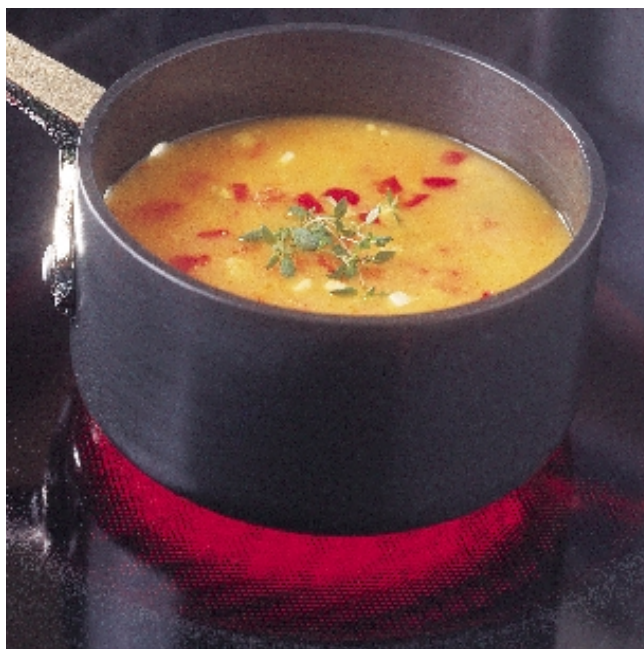

Electronic sensors

Sensors detect the presence of metal cookware. Depending on the size of the pan, a sensor selects a 6" or 9" element. If the pan is removed for more than a minute, another sensor will shut off the element.

Built-In Cooktops: 36" Electric CleanDesign

These models include • Smooth frameless ceramic-glass CleanDesign cooktop • Flush-mount installation capability (except Stainless steel models)
• Fingerprint- and scratch-resistant patterned glass cooktop • Five hot surface indicator lights **Note: bold = feature upgrade from previous model**



GE Profile™

36" Electronic Touch Control Cooktop

JP968BC Black on black

• Frameless cooktop • **Electronic touch controls** • **Pan presence sensor** • **Pan size sensor** • **Control lock-out** • **Kitchen timer** • Five ribbon heating elements: one 6", one 7" with warmer, one dual (6"/9") and two 7" with connecting bridge element

JP968SC Stainless steel (not shown)

JP968WC White on white (not shown)

JP968CC Bisque (not shown)



GE Profile

36" Electric CleanDesign Cooktop

JP960TC True white

• Frameless true white cooktop • Five ribbon heating elements: one 6", one 7", one dual (6"/9") and two 7" with connecting bridge element



GE Profile

36" Electric CleanDesign Cooktop

JP960KC True bisque

• Frameless true bisque cooktop • Five ribbon heating elements: one 6", one 7", one dual (6"/9") and two 7" with connecting bridge element



GE Profile

36" Electric CleanDesign Cooktop

JP960SC Stainless steel

• Frameless cooktop • **Five ribbon heating elements: one 6", one 7", one dual (6"/9") and two 7" with connecting bridge element**

JP960BC Black on black (not shown)

Built-In Cooktops: 36" Electric Coil



GE®

36" Electric Coil Cooktop

JP626WV White on white

• Porcelain-enameled lift-up cooktop • Two 8" and two 6" plug-in Calrod® heating elements • Infinite heat rotary controls • One-piece chrome drip bowls • Upfront color-matched glass control panel

JP626CD Bisque (not shown)

36" Electric CleanDesign Cooktops

	GE Profile	
	JP968	JP960
Features		
Number of elements	5 Ribbon	5 Ribbon
Dual 6"/9" heating elements	1 Ribbon (2500W)	1 Ribbon (2500W)
7" heating element	1 Ribbon w/Warmer (1500W)	1 Ribbon (1500W)
7" heating elements	2 Ribbon (1800W)	2 Ribbon (1800W)
Bridge element	1 Ribbon (800W)	1 Ribbon (800W)
Total wattage	4400W	4400W
6" heating elements	1 Ribbon (1200W)	1 Ribbon (1200W)
Hot surface indicator lights	5	5
Electronic touch controls	●	
Pan presence sensor	●	
Pan size sensor	●	
Kitchen timer	●	
Control lock capability	●	
Appearance		
Color appearance*	SS/WW/CC/BB	SS/WW/CC/BB
Frameless	●	●

*SS = Stainless steel, WW = White on white, CC = Bisque, BB = Black on black

36" Electric Coil Cooktops

	GE
	JP626
Features	
Lift-up cooktop with support rod	●
8" heating elements	2 Plug-In Calrod®
6" heating elements	2 Plug-In Calrod®
Infinite heat rotary controls	●
Control panel location	Upfront
Surface element "ON" indicator light	●
Appearance	
Color appearance*	WW/CC

*WW = White on white, CC = Bisque

Built-In Cooktops: 30" Electric CleanDesign

These models include • Smooth frameless ceramic-glass CleanDesign cooktop • Flush-mount installation capability (except stainless steel models)

• Fingerprint- and scratch-resistant patterned glass cooktop

Note: bold = feature upgrade from previous model



GE Profile™

30" Electronic Touch Control Cooktop

JP938BC Black on black

• Frameless cooktop • **Electronic touch controls** • **Pan presence sensor** • **Pan size sensor** • **Control lock-out** • **Kitchen timer** • Four ribbon heating elements: **one 6" with warmer**, one dual (6"/9") and two 7" with connecting bridge element • Four hot surface indicator lights

JP938SC Stainless steel (not shown)

JP938WC White on white (not shown)

JP938CC Bisque (not shown)



GE Profile

30" Electric CleanDesign Cooktop

JP930SC Stainless steel

• Frameless cooktop • Four ribbon heating elements: one 6", one dual (6"/9") and **two 7" with connecting bridge element** • Four hot surface indicator lights

JP930TC True white (not shown)

JP930KC True bisque (not shown)

JP930BC Black on black (not shown)



GE Profile

30" Electric CleanDesign Cooktop

JP350KC True bisque

• Frameless true bisque cooktop • Four ribbon heating elements: **one dual (6"/9")**, two 8" and one 6" • Four hot surface indicator lights

JP350SC Stainless steel (not shown)

JP350TC True white (not shown)

JP350WC White on white (not shown)

JP350BC Black on black (not shown)



GE®

30" Electric CleanDesign Cooktop

JP340WC White on white

• Frameless cooktop • **Four ribbon heating elements: two 6" and two 8"** • **Hot surface indicator light**

JP340BC Black on black (not shown)

Built-In Cooktops: 30" and 21" Electric Coil

These models include • Porcelain-enameled cooktop • Infinite heat rotary controls

Note: bold = feature upgrade from previous model



GE

30" Electric Coil Cooktop

JP326BV Black on black

• Two 8" and two 6" **plug-in Calrod® heating elements** • One-piece drip bowls • Color-matched glass control panel • Lift-up cooktop

JP326WV White on white (not shown)

JP326CC Bisque (not shown)

JP326CV Brushed-chrome (not shown)



GE

21" Electric Coil Cooktop

JP202D White on white

• One 8" and one 6" plug-in heating element • Infinite heat rotary controls • Removable one-piece chrome drip bowls • Heating element "ON" indicator light

JP201CB Stainless steel (not shown)

30" Electric CleanDesign Cooktops

	GE Profile			GE
	JP938	JP930	JP350	JP340
Features				
Number of elements	4 Ribbon	4 Ribbon	4 Ribbon	4 Ribbon
Dual 6"/9" heating elements	1 Ribbon (2500W)	1 Ribbon (2500W)	1 Ribbon (2500W)	
8" heating elements			2 Ribbon (2000W)	2 Ribbon (2000W)
7" heating elements	2 Ribbon (1800W)	2 Ribbon (1800W)		
Bridge element	1 Ribbon (800W)	1 Ribbon (800W)		
Total wattage	4400W	4400W		
6" heating elements	1 Ribbon w/Warmer (1200W)	1 Ribbon (1200W)	2 Ribbon (1200W)	(1200W)
Hot surface indicator lights	4	4	4	1
Electronic touch controls	•			
Pan presence sensor	•			
Pan size sensor	•			
Kitchen timer	•			
Control lock capability	•			
Appearance				
Color appearance*	SS/WW/CC/BB	SS/WW/CC/BB	SS/WW/WW/CC/BB	WW/BB
Frameless	•	•	•	•

*SS = Stainless steel, WW = White on white, CC = Bisque, BB = Black on black

30" and 21" Electric Coil Cooktops

	GE	
	JP326	JP201 JP202
Features		
Lift-up cooktop with support rod	•	
8" heating elements	2 Plug-In Calrod®	1 Plug-In
6" heating elements	2 Plug-In Calrod®	1 Plug-In
Infinite heat rotary controls	•	•
Control panel location	Right Side	Upfront
Surface element "ON" indicator light	•	•
Appearance		
Color appearance*	WW/CC/BB/BC	SS/WW
Frameless	•	•

*SS = Stainless steel, WW = White on white, CC = Bisque, BB = Black on black, BC = Brushed chrome

Built-In Gas Cooktops

GE gas cooktops give you the power to create inspired meals.



Deep-recessed gas cooktop

The preferred choice of serious chefs, the GE gas cooktop offers stunning appearance, full performance and simple cleanability.

A boldly designed grid of continuous burner grates extends the full width of the cooking surface. The heavy-duty grates keep pots level, allowing you to easily move them from one burner to another. Cooking flexibility is enhanced by the high-performance burners, which boast 15,000 BTUs of cooking power.



Gas-on-glass cooktop

GE gas-on-glass cooktops combine outstanding appearance and performance, along with the practical benefit of ease of cleaning.

The continuous burner grates are uniquely configured to provide stability for easy pot movement. Five sealed burners, mounted in easy-to-clean ceramic-glass, provide low and high heat settings for cooking versatility. Variable controls are positioned front and center, close at hand, for quick, convenient adjustment.

**Maximum Plus burner**

This 15,000-BTU burner instantly supplies the intense heat needed for sautéing, boiling and stir-frying.

**Precise Simmer burner**

This low-output simmer burner keeps sauces bubbling gently for hours without scorching.

**Continuous grates**

A professional-style grid of continuous burner grates allows easy pot movement. Some models have dishwasher-safe grates designed to withstand more than 20 years of washing.

**Ease of cleaning**

The sealed burner design helps contain spills, keeping them on top where they're easily wiped off.

Built-In Cooktops: 36" Gas

These models include • Sealed burners • Electronic pilotless ignition

Note: bold = feature upgrade from previous model



GE Profile™

36" Gas Deep Stainless Cooktop

JGP963SEF Stainless steel

- **Deep stainless cooktop** • Continuous deluxe cast-iron grates
- Five sealed gas burners • **15,000-BTU Maximum Plus burner** • Two Precise Simmer burners • Dishwasher-safe grates



GE Profile

36" Gas Deep Porcelain Cooktop

JGP963BEC Black on black

- **Deep porcelain cooktop** • Continuous deluxe cast-iron grates
- Five sealed gas burners • **15,000-BTU Maximum Plus burner**
- Two Precise Simmer burners • Dishwasher-safe grates

JGP963WEC White on white (not shown)

JGP963CEC Bisque (not shown)



GE Profile

36" Gas on Glass Cooktop

JGP962SEC Stainless steel

- **Gas on glass ceramic cooktop** • Continuous deluxe cast-iron grates • Five sealed gas burners • **15,000-BTU Maximum Plus burner** • Two Precise Simmer burners • **Dishwasher-safe grates**

JGP962TEC True white (not shown)

JGP962KED True bisque (not shown)

JGP962BEC Black on black (not shown)



GE®

36" Gas Cooktop

JGP960SED Stainless steel

- Tempered glass cooktop • Deluxe cast-iron grates • Five sealed gas burners • Two Precise Simmer burners • **12,000-BTU Maximum Output burner**



GE

36" Gas Cooktop

JGP636CED Bisque

- Tempered glass cooktop • Deluxe cast-iron grates • Five sealed gas burners • Two Precise Simmer burners • 12,000-BTU Maximum Output burner

JGP636WED White on white (not shown)

JGP636BED Black on black (not shown)



GE

36" Deep Porcelain Gas Cooktop

JGP628CEC Bisque

- Deep porcelain cooktop • Precise Simmer burner • Continuous grates

JGP628WEC White on white (not shown)

JGP628BEC Black on black (not shown)

Built-In Gas Cooktops

	GE Profile		GE		
	JGP963	JGP962	JGP960	JGP636	JGP628
Features					
Cooktop burners	5 Sealed	5 Sealed	5 Sealed	5 Sealed	4 Sealed
Max. Plus Burner 15,000 BTU	●	●			
Maximum Output burner			●	●	
Precise Simmer burner(s)	2	2	2	2	●
Electronic pilotless ignition	●	●	●	●	●
Cooktop grates	Continuous Deluxe Cast	Continuous Deluxe Cast	Deluxe Cast	Deluxe Cast	Continuous
One-piece drip pans			Porc.-Enam.	Porc.-Enam.	Porc.-Enam.
Controls	Upfront	Upfront	Upfront	Upfront	Upfront
Appearance					
Color appearance*	SS/WW/CC/BB	SS/WW/CC/BB	SS	WW/CC/BB	WW/CC/BB

*SS = Stainless steel, WW = White on white, CC = Bisque, BB = Black on black

A set of LP orifices is included with each cooktop for LP conversion. Factory set for Natural Gas.

Built-In Cooktops: 30" Gas

These models include • Sealed burners (except JGP320EV) • Electronic pilotless ignition

Note: bold = feature upgrade from previous model



GE Profile™

30" Gas Deep Porcelain Cooktop

JGP933WEC White on white

- **Deep porcelain cooktop** • Continuous deluxe cast-iron grates
- Four sealed gas burners • **15,000-BTU Maximum Plus burner**
- Precise Simmer burner • Dishwasher-safe grates

JGP933SEF Stainless steel (not shown)

- Deep stainless cooktop

JGP933CEC Bisque (not shown)

JGP933BEC Black on black (not shown)



GE Profile

30" Gas on Glass Cooktop

JGP932KED True bisque

- **Gas on glass ceramic cooktop** • Continuous deluxe cast-iron grates
- Four sealed gas burners • **15,000-BTU Maximum Plus burner**
- Precise Simmer burner • **Dishwasher-safe grates**

JGP932SEC Stainless steel (not shown)

JGP932TEC True white (not shown)

JGP932BEC Black on black (not shown)



GE®

30" Gas Cooktop

JGP930SED Stainless steel

- Tempered glass cooktop • Deluxe cast-iron grates • Four sealed gas burners • Precise Simmer burner • **12,000-BTU Maximum Output burner**



GE

30" Gas Cooktop

JGP336WED White on white

- **Tempered glass cooktop** • **Deluxe cast-iron grates** • Four sealed gas burners • Precise Simmer burner • **12,000-BTU Maximum Output burner**

JGP336CED Bisque (not shown)

JGP336BED Black on black (not shown)

Not all features available on all models.



GE
30" Deep Porcelain Gas Cooktop
JGP328BEC Black on black
• Deep porcelain cooktop • Four sealed gas burners • Precise
Simmer burner • Continuous grates
JGP328WEC White on white (not shown)
JGP328CEC Bisque (not shown)



GE
30" Gas Cooktop
JGP320EV White or black
• Lift-up cooktop • Glass control panel • Standard porcelain
steel grates • Four standard gas burners

Built-In Gas Cooktops

	GE Profile		GE			
	JGP933	JGP932	JGP930	JGP336	JGP328	JGP320
Features						
Cooktop burners	4 Sealed	4 Sealed	4 Sealed	4 Sealed	4 Sealed	4 Standard
Max. Plus Burner 15,000 BTU	•	•				
Maximum Output burner			•	•		
Precise Simmer burner(s)	•	•	•	•	•	
Electronic pilotless ignition	•	•	•	•	•	•
Cooktop grates	Continuous Deluxe Cast	Continuous Deluxe Cast	Deluxe Cast	Deluxe Cast	Continuous	Standard Steel
One-piece drip pans			Porc.-Enam.	Porc.-Enam.		Chrome
Controls	Right Side	Right Side	Right Side	Right Side	Right Side	Right Side
Appearance						
Color appearance*	SS/WW/CC/BB	SS/WW/CC/BB	SS	WW/CC/BB	WW/CC/BB	WH/BL

*SS = Stainless steel, WW = White on white, CC = Bisque, BB = Black on black, WH = White, BL = Black
A set of LP orifices is included with each cooktop for LP conversion. Factory set for Natural Gas.

Built-In Downdraft Cooktops

GE Profile™ downdraft cooktops make it easy to achieve a custom look.



GE Profile electric downdraft cooktops

Designed to fit seamlessly into any kitchen, GE Profile downdraft cooktops give your creativity free rein. The powerful vent eliminates the need for a range hood, allowing a variety of installation possibilities. These cooktops go wherever they're needed most, whether it's in an island or peninsula, along a wall or on a countertop.

Electric models provide quick cooking response with the elegant style of patterned ceramic-glass. The smooth surface is fingerprint- and scratch-resistant for easy cleaning.



GE Profile gas downdraft cooktops

Gas downdraft cooktops offer precise temperature control, with power capacities ranging from low simmer to high output. The four burners are electronically ignited and sealed to the cooktop for added cooking and cleaning convenience.



Powerful three-speed vent

Located in the center of the cooktop, the three-speed 400-CFM venting system eliminates the need for an overhead hood, and it pulls out for easy cleaning.



Easy-turn controls

Sturdy knob controls allow a wide range of heat settings, allowing you to set the cooktop to the exact temperature your recipe demands.



Bridge element

The bridge element expands your cooking options, giving you the flexibility of using one or two elements to create an elongated cooking area.



Ease of cleaning

The frameless ceramic-glass cooktop offers a smooth surface with no nooks or crannies to catch crumbs or drips.

Built-In Cooktops: 30" Electric Downdraft

These models include • Smooth frameless ceramic-glass CleanDesign cooktop • Four ribbon heating elements: one 6", one dual (6"/9") and two 7" with connecting bridge element • Four hot surface indicator lights • Powerful 400 CFM downdraft venting system • Three-speed fan • Upfront controls



GE Profile™
30" Electric Downdraft Cooktop
JP989SD Stainless steel
JP989TD True white (not shown)
JP989BD Black on black (not shown)



GE Profile
30" Electric Downdraft Cooktop
JP989KD True bisque

Built-In Cooktops: 30" Gas Downdraft

These models include • Glass-ceramic cooktop • Four sealed gas burners • Continuous cast-iron grates • Electronic pilotless ignition • Powerful 400 CFM downdraft venting system • Three-speed fan • Upfront controls



GE Profile
30" Gas Downdraft Cooktop
JGP989TC True white



GE Profile
30" Gas Downdraft Cooktop
JGP989BC Black on black
JGP989KC True bisque (not shown)

Built-In Cooktops: 36" Gas Downdraft



GE Profile

36" Gas Integrated Downdraft Cooktop

JGP656WB White on white

• Tempered glass cooktop • Four sealed gas burners • Cast-iron grates • Electronic pilotless ignition • 350-CFM retractable downdraft venting system • Upfront variable-speed fan control • JXBA56WW or JXBA56BB Downdraft Venting Kit required for installation • Optional JXRB57 kit for installation of blower and motor below the floor. Use optional GE accessory cover (JXBC57) for outdoor installation of blower and motor.

JGP656BB Black on black (not shown)

Shown with JVB96SA Telescopic Downdraft unit.

Integrated Downdraft Gas Cooktop

	GE Profile
	JGP656
Features	
Cooktop burners	Sealed
Electronic pilotless ignition	●
Burner grates	2
Downdraft exhaust (CFM)	350
Optional blower mount capabilities	●
3-1/4" x 10" rectangular duct	●
6" Round duct	●
Upfront variable-speed fan control	●
Removable grease filters	●
Appearance	
Color appearance*	WW/BB
Upfront controls	●
Telescopic cover plate	WW/BB

*WW = White on white, BB = Black on black

IMPORTANT: Cooktop is shipped separately. JXBA56BB or JXBA56WW (motor, blower and downdraft housing assembly required. Must be ordered with cooktop.)

JXLP56 LP Conversion Kit. LP orifices for LP conversion.

Factory set for natural gas.

JXBC57 Outdoor Cover. Optional accessory may be ordered for installation of motor and blower assembly on outside wall.

JXRB57 Remote Installation Kit. Optional accessories may be ordered for installation below the floor.

A minimum 36" side-to-side undercounter clearance is required for ease of installation.

Unit is furnished with a 4-foot, 110V electric cord.

Built-In Electric Downdraft Cooktops

	GE Profile
	JP989
Features	
Downdraft exhaust (CFM)	400
Three-speed downdraft vent fan	●
Number of elements	4
Dual 6"/9" heating elements	1 Ribbon (2500W)
7" heating elements	2 Ribbon (1800W)
Bridge element	1 Ribbon (800W)
Total Wattage	4400W
6" heating elements	1 Ribbon (1500W)
Infinite heat controls	●
Hot surface indicator lights	4
Heating element "ON" indicator light	●
Appearance	
Color appearance*	SS/WW/CC/BB
Frameless	●

*SS = Stainless steel, WW = White on white, CC = Bisque, BB = Black on black

Built-In Gas Downdraft Cooktops

	GE Profile
	JGP989
Features	
Cooktop burners	Sealed
Electronic pilotless ignition	●
Glass ceramic surface	White/Bisque/Black
Burner grates	2 Double
Downdraft exhaust (CFM)	400
Appearance	
Color appearance*	WW/CC/BB
Frameless	●

*WW = White on white, CC = Bisque, BB = Black on black

A set of LP orifices is included with each cooktop for LP conversion. Factory set for Natural Gas.

Built-In Modular Cooktops

GE Profile™ and GE® modular cooktops offer amazing design and cooking flexibility.



Electric modular cooktops

GE modular cooktops can be customized to suit your specific cooking needs and tastes.

Electric modular cooktops are available with Calrod® heating elements, ribbon heating elements, a griddle or a grill with cover.



Gas modular cooktops

Like their electric counterparts, gas modular cooktops give you a variety of flexible cooking options. Among these are a two-burner gas module, griddle or grill with cover. Simply plug the module you want into the cooktop, and unplug it for easy cleaning and storage.

A patio grill with fixed grill burners on each side is also available for your outdoor patio or sunroom.



Downdraft vent

The three-speed downdraft vent draws smoke and odors down and out of the kitchen. The system uses a powerful blower, making it perfect for island or peninsula installation.




Cooking flexibility

Modular cooktops deliver unique performance capabilities with versatile cooking modules, including a grill option that brings outdoor-style grilling indoors and a griddle accessory that's great for family-size breakfasts.

Optional Select-Top™ Modules *(available at additional cost)*

ELECTRIC MODULES



Grill Module

Front- and rear-controlled heating element for more cooking flexibility and energy savings. One-piece grill grate and porcelain-enameled reflector pan can be removed for cleaning in sink or dishwasher.



Griddle Accessory

(For use with optional grill module) Place over heating element and reflector pan from optional grill module. Griddle accessory has a non-stick coating and is self-draining.




Ribbon Module

Patterned glass top with one 8" and one 6" ribbon heating element.



Coil Module

One 8" and one 6" plug-in heating element with removable one-piece drip bowls.



Grill Cover

Covers grill area when not in use. Available in Black on black and White on white.

GAS MODULES




Two-Burner Gas Module

Two standard gas burners offer a range of temperature settings for cooking versatility.




Griddle Module

Includes front- and rear-controlled heating. One-piece grill grate is non-stick coated.



Griddle

(For use with optional grill module) Place over heating element and reflection pan from optional grill module. Griddle accessory has a non-stick coating and is self-draining.



Grill Cover

Covers grill area when not in use. Available in Black on black and White on white.

Built-In Cooktops: Electric Downdraft Select-Top™ Modular

These models include • Infinite heat rotary controls • Powerful 400-CFM downdraft venting system
• Heating element "ON" indicator light **Note: bold = feature upgrade from previous model**



GE Profile™

30" Dual Modular Cooktop

JP389WV White on white

- Three-speed fan • Porcelain-enameled cooktop
- Both sides accept optional cooking modules

Shown with optional Ribbon module JXDR50VW and Grill module JXDL44N.



GE Profile

30" Dual Modular Cooktop

JP389BV Black on black

- Three-speed fan • Porcelain-enameled cooktop
- **Both sides accept optional cooking modules**

Shown with optional Ribbon modules JXDR50VB.



GE®

30" Single Modular Cooktop

JP385WV White

- Porcelain-enameled cooktop • Fixed 6" and 8" plug-in coil heating elements
- Left side accepts optional cooking modules

Shown with optional Grill module JXDL44N.



GE

30" Single Modular Cooktop

JP385BV Black

- Porcelain-enameled cooktop • Fixed 6" and 8" plug-in coil heating elements
- **Left side accepts optional cooking modules**

Shown with optional Grill module JXDL44N.

Built-In Cooktops: 30" Patio Grill



GE

30" Patio Grill

JP380BV Black

- Porcelain-enameled cooktop • Fixed grill elements each side
- Infinite heat rotary controls • Powerful downdraft venting system
- Heating element "ON" indicator light • Optional grill covers (JXDM4) available at additional cost

U.L. approved for outdoor use only.

Select-Top™ Modular Downdraft Cooktops and Patio Grill

	GE Profile	GE	
	Dual Modular	Single Modular	Patio Grill
	JP389	JP385	JP380
Features			
Configuration	Dual Modular	Single Modular	Outdoor Grill
Infinite heat controls	Rotary	Rotary	Rotary
Heating element "ON" indicator light	●	●	●
Downdraft exhaust (CFM)	400	400	375
Single-speed downdraft vent fan		●	●
Three-speed downdraft vent fan	●		
Fixed plug-in coil elements		One 6", One 8"	Fixed Grill (each side)
Accessories			
Ribbon heating elements (one 8" and one 6")	JXDR50VW JXDR50VB	JXDR50VW JXDR50VB	
Coil heating elements (one 6", one 8" element with removable one-piece bowls)	JXDC44RWH JXDC43RBL	JXDC44RWH JXDC43RBL	
Grill Module*	JXDL44N	JXDL44N	
Griddle Accessory	JXDD44R	JXDD44R	
Grill Cover	JXDM3 JXDM2	JXDM3 JXDM2	JXDM4
Appearance			
Color appearance**	WW/BB	WW/BB	BB

*Grill Module includes Coil heating element, one-piece Grill Grate, and porcelain reflector pan.

**WW = White on white, BB = Black on black

Built-In Cooktops: 30" Gas Downdraft Modular Cooktop



GE Profile

30" Gas Single Modular Cooktop

JGP389WEV White on white

- Fixed standard gas burners (right side) • Left side accepts optional cooking modules • Powerful downdraft venting • Electronic pilotless ignition • Upfront controls

Shown with optional Grill module JXGG89.

JGP389BEV Black on black (not shown)

Built-In Gas Downdraft Modular Cooktops

	GE Profile
	JGP389*
Features	
Configuration	Single Modular
Accepts modules	Left Side
Fixed gas cooktop burners (right side)	Standard
Electronic pilotless ignition	●
Downdraft vent fan	●
Downdraft exhaust (CFM)	375
Appearance	
Color appearance**	WW/BB
Upfront controls	●

*Left side accepts optional modules that must be ordered and are available at additional cost. Shipped with fixed standard gas burners, right side.

**WW = White on white, BB = Black on black

Optional Modules (available at additional cost)

Two-burner gas module for standard burners:

JXGB89W (White on white)

JXGB89B (Black on black)

Gas grill module: JXGG89

Griddle for use with optional Grill module: JXGL89

Grill Cover:

JXGC89W (White on white)


JXGC89B (Black on black)

Not all features available on all models.


Built-In Cooktops: 36" and 30" Electric CleanDesign

Models JP968, 960, 938, 930, 350, 340 (in inches)

Counter Installation Dimensions (in inches)

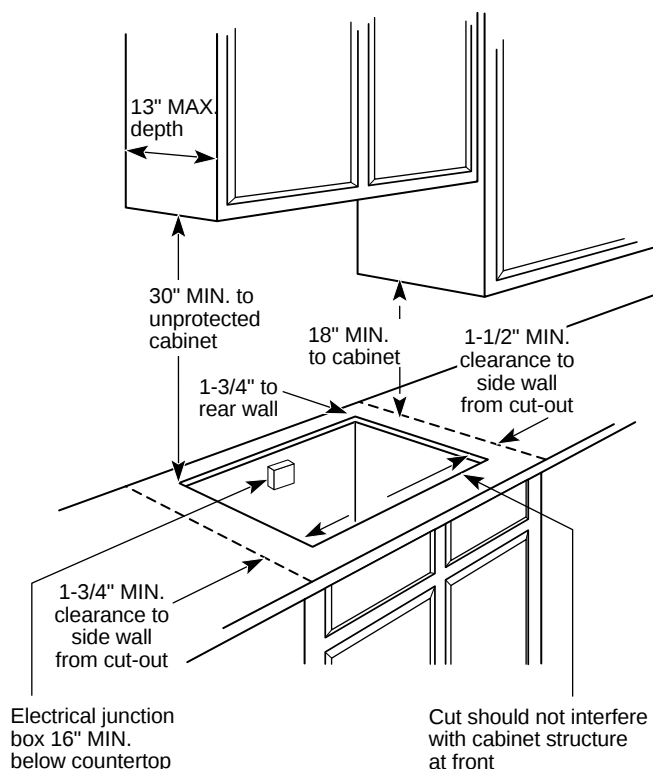

Cooktop Dimensions (in inches)

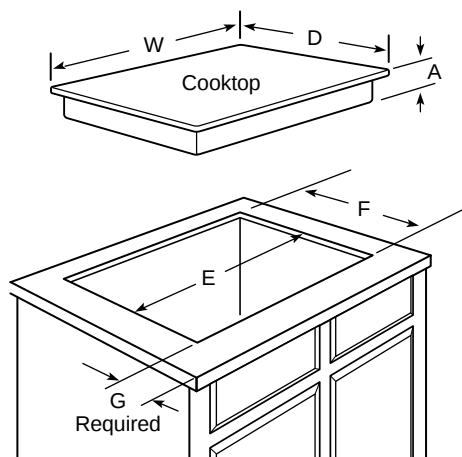

Built-in CleanDesign Cooktops:

Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

Installation Information:

Before installing, consult installation instructions packed with product for current dimensional data.

36" Ribbon cooktops (excluding JP968) are approved for use over GE 30" Single Wall Ovens only. 30" Ribbon cooktops (excluding JP938) are approved for use over GE 30" Single Wall Ovens. All 30" ribbon cooktops can be installed over 27" wall ovens except stainless model JKP18SD. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

Note: If installing with a GE Profile™ Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

Note: Consult cabinet and countertop manufacturer's specs for flush mount installation prior to install.

Filler Trim Kit

When replacing an old GE 30" cooktop (with larger opening) with Models JP938/930/350/340, use the following one-piece trim kit to fill in the over-size hole. Available at additional cost.

JXTR31W (True White)

JXTR31C (True Bisque)

JXTR31B (Black—use with black glass cooktops with a white, bisque or black pattern)

Flush Mount Installation Kit

Accommodates both 36" and 30" installations.

Not for use with stainless steel models.

JXFLMTW (True White)

JXFLMCC (True Bisque)

JXFLMBB (Black—use with black glass cooktops with a white, bisque or black pattern)

Cooktop Dimensions (in inches)

Model	Overall			Cutout			To Edge of Front Counter (Min.)
	W	D	A	E	F	G	
JP968WC/CC/BC	36	20-3/8	3-1/4*	33-7/8	19-1/8	2-1/2	
JP960TC/KC/BC	36	20-3/8	3-1/4*	33-7/8	19-1/8	2-1/2	
JP938WC/CC/BC	29-3/4	20-7/8	3-1/4*	28-1/2	19-5/8	2-1/2	
JP930TC/KC/BC	29-3/4	20-7/8	3-1/4*	28-1/2	19-5/8	2-1/2	
JP350TC/WC/KC/BC	29-3/4	20-7/8	3-1/4*	28-1/2	19-5/8	2-1/2	
JP340WC/BC	29-3/4	20-7/8	3-1/4*	28-1/2	19-5/8	2-1/2	

*Depth of unit at conduit connection location (rear) is 6-1/4" on models JP968/938 and 4-5/8" on models JP960/930/350/340.

Stainless Steel Cooktop Dimensions (in inches)


Model	Overall			Cutout			To Edge of Front Counter (Min.)
	W	D	A	E	F	G	
JP968SC	36-1/8	21	3-1/4*	33-7/8	19-1/8	2-1/2	
JP960SC	36-1/8	21	3-1/4*	33-7/8	19-1/8	2-1/2	
JP938SC	29-7/8	21-1/2	3-1/4*	28-1/2	19-5/8	2-1/2	
JP930SC	29-7/8	21-1/2	3-1/4*	28-1/2	19-5/8	2-1/2	
JP350SC	29-7/8	21-1/2	3-1/4*	28-1/2	19-5/8	2-1/2	

*Depth of unit at conduit connection location (rear) is 6-1/4" on models JP968/938 and 4-5/8" on models JP960/930/350.

Built-In Cooktops: 36", 30" and 21" Electric Coil

Models JP626, 326, 202, 201 (in inches)

Counter Installation Dimensions (in inches)

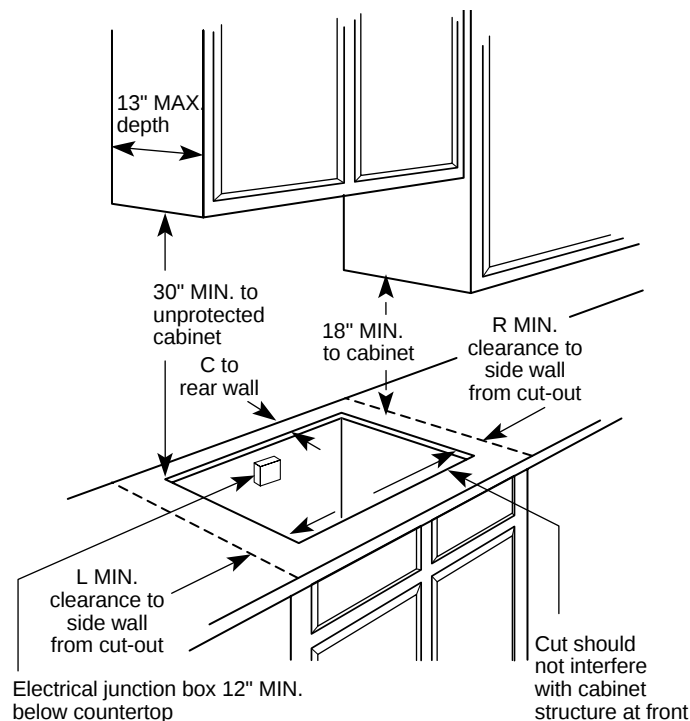

Built-In Electric Cooktops

Required free area between the bottom of the cooktop and any combustible material, i.e., shelving is 5" minimum on models JP626/326 and 1-1/2" minimum on models JP201/202. Free area not required when installing wall oven underneath. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

Installation Information:

Before installing, consult installation instructions packed with product for current dimensional data.


Cooktop models JP326WV/326CC/326BV/326CV are approved for use over select GE 30" or 27" Single Wall Ovens. JP626WV/626AV are approved for use over GE 30" Single Wall Ovens only. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

Cooktop models JP201CB and JP202D are approved for use over GE undersink dishwasher model GSM2100. Refer to cooktop installation instructions packed with product for current dimensional data.

Note: If installing with a GE Profile Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

Note: The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.

Built-In Cooktop Dimensions (in inches)

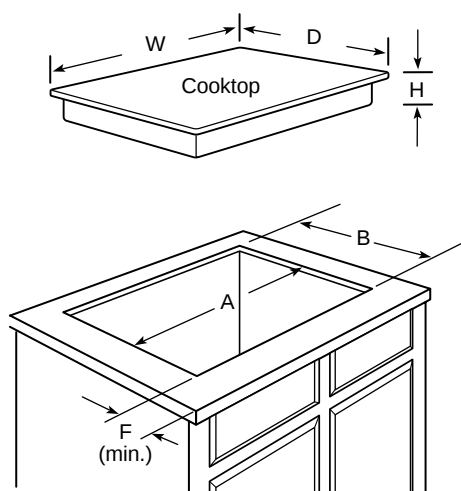

Dimensions (in inches)


Model	Overall		Cutout		Minimum Spacing To Nearest Combustible Wall			To Edge of Front Counter (Min.)
	W	D	A	B	C	R	L	
JP626	35-1/2	21	33-7/8	19-1/8	1-3/4	6	6	2-1/2
JP326	30-1/4	21-1/4	28-1/2	19-5/8	1-3/4	2	5-1/2	2-1/2
JP202	21-1/4	16-5/8	20-1/8	16-1/8	2	2	2	2-3/4
JP201	21-1/4	16-5/8	20-1/8	16-1/8	2	2	2	2-3/4

Filler Trim Kit—When replacing an old GE 30" cooktop (with larger opening) with Models JP326WV, JP326CC, JP326BV, JP326CV, use the following one-piece trim kit to fill in the over-size hole. Available at additional cost.
JXTR31W (White)
JXTR31C (Bisque)
JXTR31B (Black)

Built-In Cooktops: 36" and 30" Gas

Models JGP963, 962, 960, 636, 628, 933, 932, 930, 336, 328, 320 (in inches)

Counter Installation Dimensions (in inches)

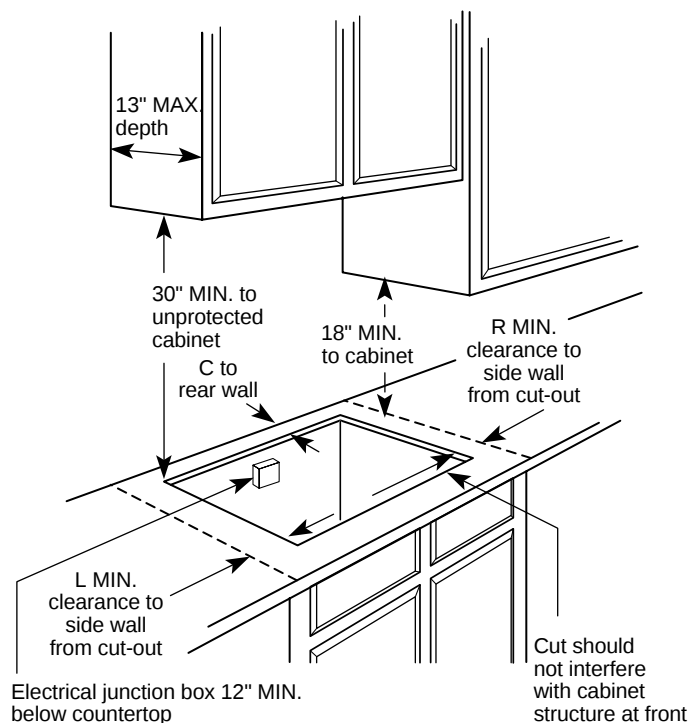

Installation With Single Wall Oven Information:

30" Gas Cooktops are approved for use over GE 27" Wall Ovens. 36" and 30" Gas Cooktops are approved for use over 30" Wall Ovens. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

Optional Gas Range Wok Accessory

(Available at additional cost)

JXWK = Wok accessory holder sits on top of maximum burner grate to hold a **round-bottom** wok. For use with JGP960/930/636/336 models only.


JXWK2 = Wok accessory holder sits on top of maximum burner grate to hold a **round-bottom** wok. For use with JGP963/933/962/932 models only.

Dimensions (in inches)

Model	Overall			Cutout		Minimum Spacing To Nearest Combustible Wall			To Edge of Front Counter
	W	D	H	A	B	C	L	R	F
JGP963	36	21	3-3/16	33-7/8	19-1/8	2-1/4	3-3/4	6	2-1/2
JGP933	30	21	3-3/16	28-1/2	19-5/8	2-1/4	3-3/4	6	2-1/2
JGP962	36	20-7/16	3-1/16	33-7/8	19-1/8	2-1/4	3-3/4	6	2-1/2
JGP932	29-3/4	21	3-3/16	28-1/2	19-5/8	2-1/4	3-3/4	6	2-1/2
JGP960	36	21	3-1/16	33-7/8	19-1/8	2-1/4	3-3/4	6	2-1/2
JGP636	36	21	3-1/16	33-7/8	19-1/8	2-1/4	3-3/4	6	2-1/2
JGP628	36	21	3-3/16	33-7/8	19-1/8	2-1/4	3-3/4	6	2-1/2
JGP930	30	21	2-1/2	28-1/2	19-5/8	2-1/4	3-3/4	6	2-1/2
JGP336	30	21	2-1/2	28-1/2	19-5/8	2-1/4	3-3/4	6	2-1/2
JGP328	30	21	3-3/16	28-1/2	19-5/8	2-1/4	3-3/4	6	2-1/2
JGP320	30-1/4	21-1/4	3-9/32	28-1/2	19-5/8	1-3/4	3	3	3-1/4

* Allow 5-3/4" depth at rear for electrical and gas connections.


Cooktop Dimensions (in inches)

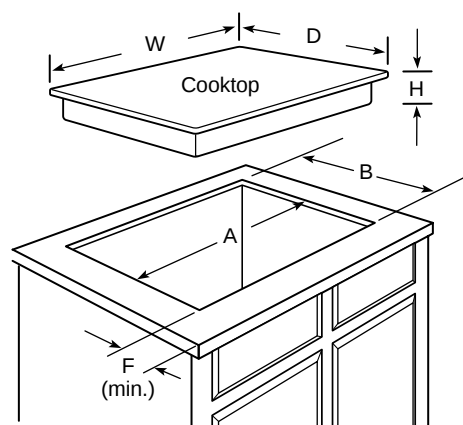


Note: All gas cooktop models require 7/16" free area below cooktop height to combustible material. 0" clearance is required between left and right sides of cooktop below countertop. Requires 18" minimum from countertop to adjacent overhead cabinets.* *AGA requirement.

Note: If installing with a GE Profile™ Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

Gas Connection Models JGP963/962/636/628




Gas Connection Models JGP933/932/336/328/320




Built-In Cooktops: 36" Integrated Downdraft Gas

Model JGP656 (in inches)

Cabinet Requirements Dimensions (in inches)

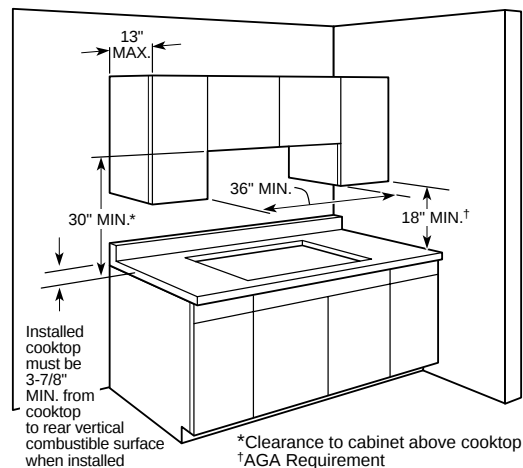



Gas and Electrical Supply Location Dimensions (in inches)

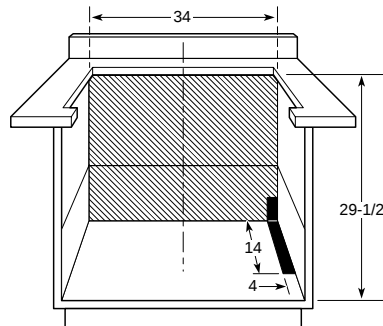

Gas and Electrical Supply Location


The gas supply pipe and the electrical supply receptacle entering the cabinet should not be positioned as shown in the shaded areas. The cooktop is equipped with a 4' power supply cord and should reach any desired location on cabinet walls.

Downdraft Gas Cooktops Dimensions (in inches)

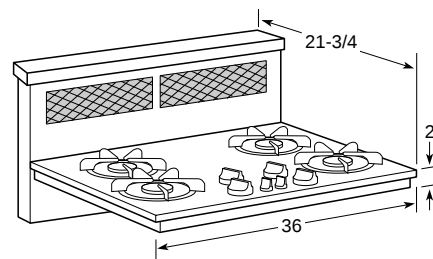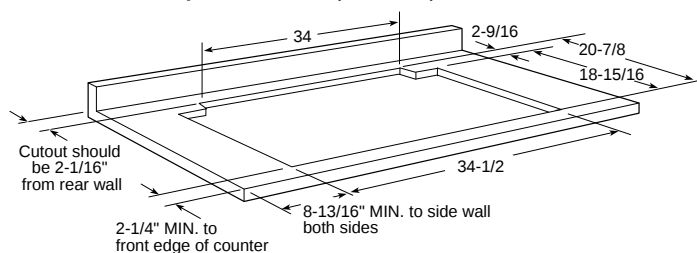


Venting Options (Through the Floor)


Must use JXBC57 or JXRB57 kit

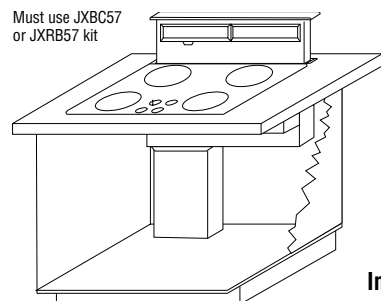


In Cabinet Discharge (Down)

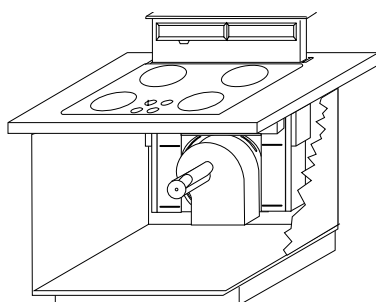

In Cabinet Discharge (Right)

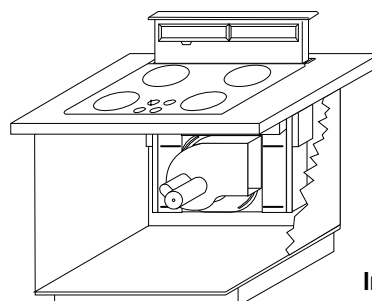

In Cabinet Discharge (Left)

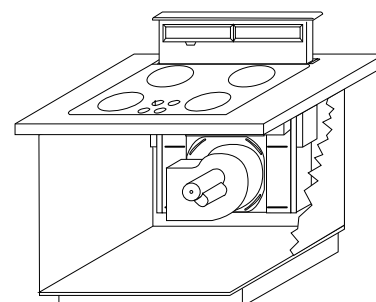


Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.


Built-In Cooktops: 30" Electric and Gas Downdraft

Models JP989, JGP989 (in inches)

Built-In Electric and Gas Downdraft Cooktops Dimensions (in inches)

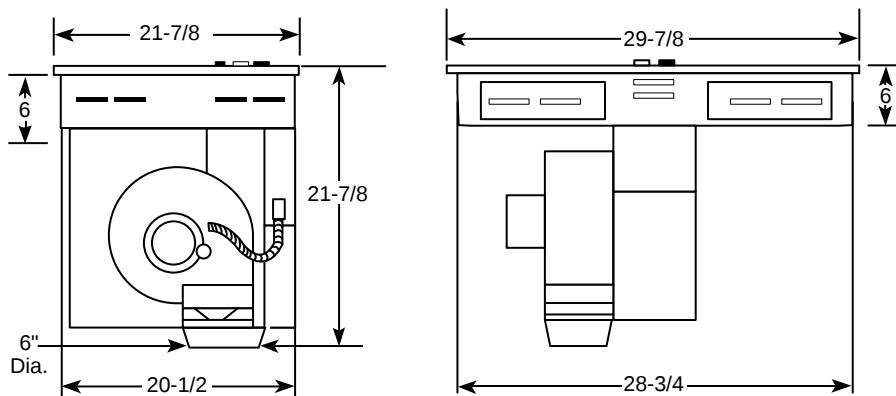

Built-In Electric and Gas Cutout Dimensions (in inches)

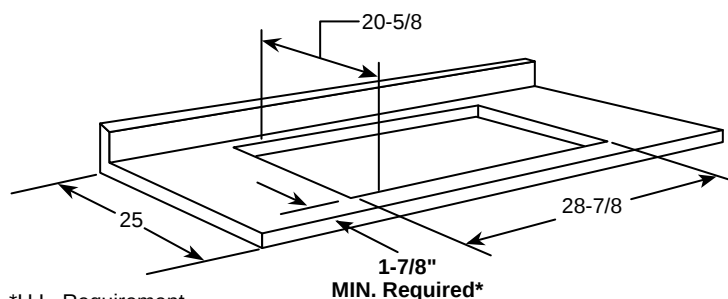


*U.L. Requirement.

MIN. Required*

Note: A 5" minimum spacing to adjacent side wall is required

Built-In Electric and Gas Cabinet Dimensions (in inches)

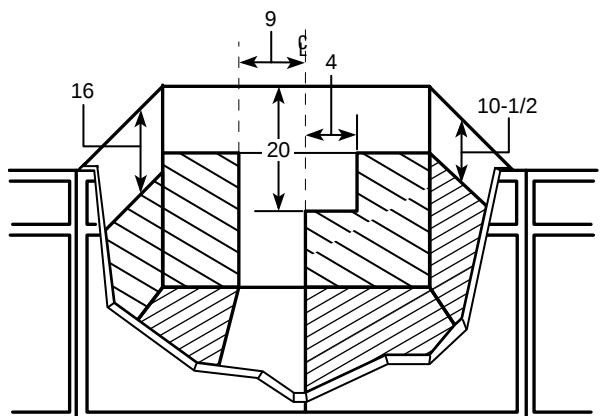

Receptacle Location

Install an approved junction box within shaded area shown in diagram. Junction box must be at least 10-1/2" below top of cabinet.

Wall Installation

Wall installations require 25" countertop depth. When cabinet is flush against the wall, the fan housing can be rotated to the horizontal position for direct venting through rear wall. Make a countertop cutout in the range cabinet according to unit dimensions and installation type. Duct hole is positioned in back of cabinet for through-the-wall ducting. Requires special offset adapter JXRW89.

Peninsula or Island Installation

For peninsula/islands a minimum 26" countertop depth is suggested. Blower should be in vertical position. Island or peninsula cabinets may require adjustment in cutout depth and/or location within the width dimensions. Duct hole is positioned in bottom of cabinet for island or peninsula installation.

Slab Installation

For peninsula or island installation and rear wall ducting, **6" PVC duct or locally approved piping should be used if installing under a poured concrete slab.**

Installing the Ductwork

Use galvanized or aluminum duct in 6" round or 3-1/4" x 10" size, or combination of both. **PVC duct or locally approved piping should be used if installing under a poured concrete slab.** Local building code must be followed in specifying type and schedule of all duct used.

Note: Ductwork must be vented to outside. Do not vent into a wall, ceiling, crawlspace, attic or any concealed space. Always use an appropriate roof or wall cap with damper. **Laundry-type wall caps should never be used.** For maximum efficiency use the shortest and straightest duct run possible, with as few fittings as possible. For satisfactory performance the duct run should not exceed 100 feet equivalent length. Refer to the table of equivalent lengths (shown in installation instructions) for various duct configurations.

Note: Electrical cable is not supplied with unit

JXRW89 Rear Wall Installation Kit


Optional accessories may be ordered for installation on rear wall.

JXCK89 Electrical Connection Kit

Optional accessory kit for JP989 electric downdraft cooktop only, includes junction box and conduit.

Installation Information:



Before installing, consult installation instructions packed with product for current dimensional data.

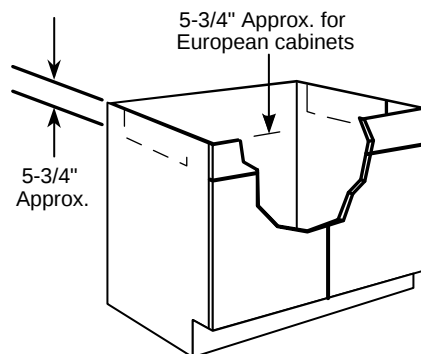


Preparing the Cabinet for Installation

In some cabinets, the sides may need to be scooped or cut down 5-3/4" as shown (right) and the corner braces removed in order to accommodate the cooktop.


Built-In Electric and Gas Downdraft Cooktops Venting Options

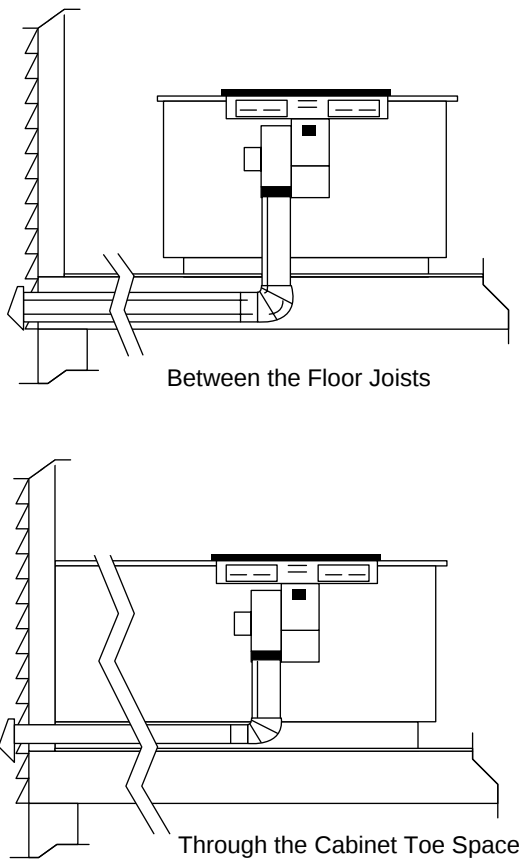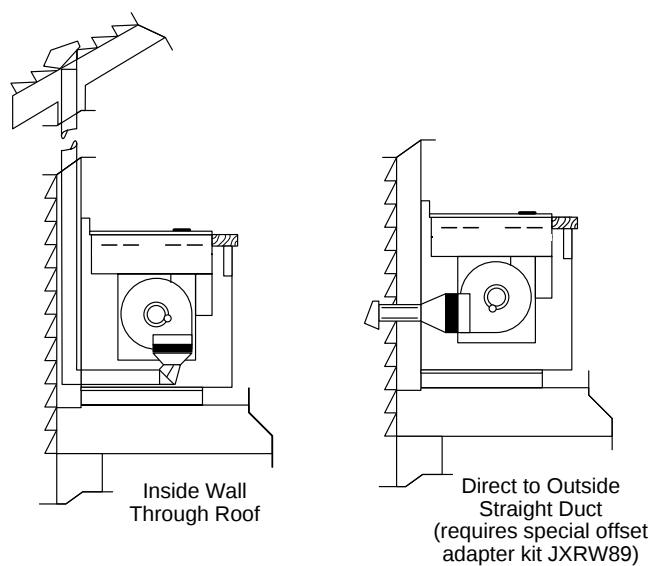

Built-In Electric and Gas Downward Venting (in inches)

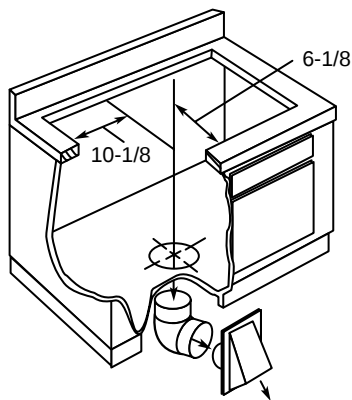


Built-In Electric and Gas Rear Wall Venting (in inches)

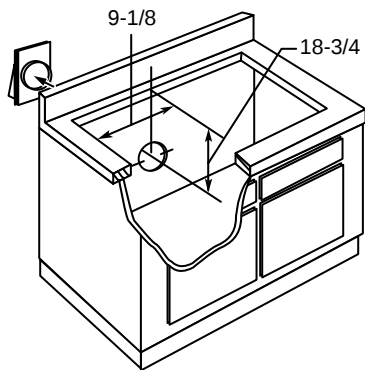

Built-In Cooktops: Downdraft Electric Select-Top™ Modular and Patio Grill

Built-In Downdraft Cooktops Dimensions (in inches)

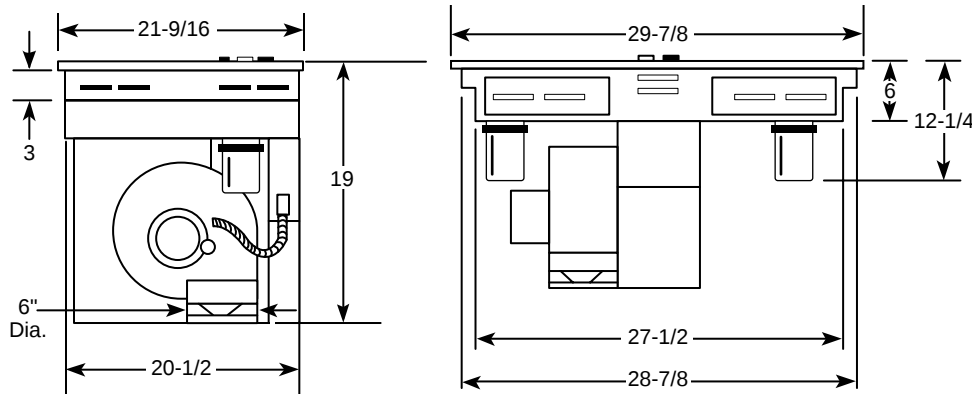

Cooktop Options

GE lets you customize your cooktop with flexible modules to suit your taste. These optional versatile modules—*Grill, Coil, Ribbon, Griddle Opening Accessory and Grill Cover*—are available at additional cost. Simply plug the modules you want into either side of the cooktop (single modular cooktops accept modules on left side only) and unplug them for easy cleaning and storage.

Grill Module, JXDL44N

Includes front/rear controlled heating element, one-piece grill grate, and porcelain-enameled reflector pan.

Grill Cover (For model JP380 patio grill only.)

Covers grill area when not in use

JXDM3—White on white, JXDM2—Black on black, JXDM4—Black on black

Griddle Accessory, JXDD44R (Use with optional Grill Module.)

Place over heating element and reflector pan from optional grill module. Griddle accessory has a non-stick coating and is self-draining.

Ribbon Modules

Patterned glass top with one 8" and one 6" ribbon heating element

JXDR50VW—White on white, JXDR50VB—Black on black,


Coil Modules

One 8" and one 6" plug-in heating element with one-piece bowls

JXDC43RBL—Black porcelain-enameled, JXDC44RWH—White porcelain-enameled

Cutout Dimensions (in inches)

Note: These cooktops are U.L. approved for indoor use only. Model JP380BV is U.L. approved for outdoor use only.

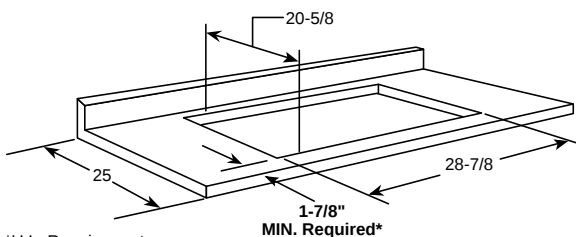

*U.L. Requirement.

Note: A 6" minimum spacing to adjacent side wall is required

Wall Installation

Wall installations require 25" countertop depth. When cabinet is flush against the wall, the fan housing can be rotated to the horizontal position for direct venting through rear wall. Make a countertop cutout that is centered in the range cabinet according to unit dimensions and installation type. Duct hole is positioned in back of cabinet for through-the-wall ducting.


Peninsula or Island Installation

For peninsula/islands a minimum 26" countertop depth is suggested. Blower should be in vertical position. Island or peninsula cabinets may require adjustment in cutout depth and/or location within the width dimensions. Duct hole is positioned in bottom of cabinet for island or peninsula installation.

Slab Installation


For peninsula or island installation and rear wall ducting, **PVC duct or locally approved piping should be used if installing under a poured concrete slab.**

Cabinet Dimensions (in inches)

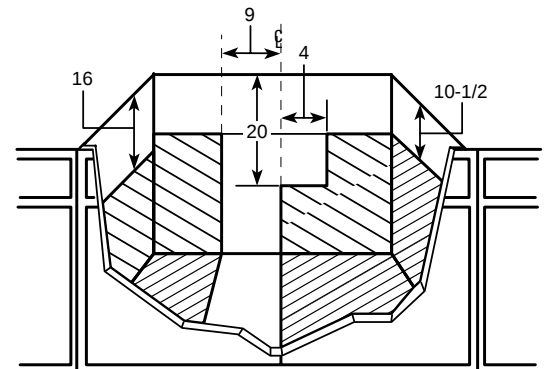

Receptacle Location

Install an approved junction box within shaded area shown in diagram. Junction box must be at least 10-1/2" below top of cabinet.




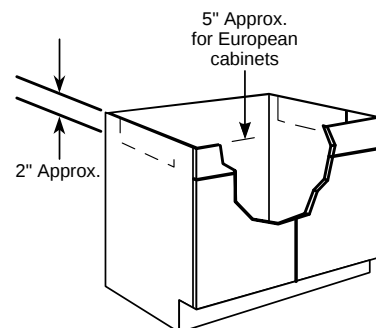


Preparing the Cabinet for Installation


In some cabinets, the sides may need to be scooped or cut down 2" as shown right) and the corner braces removed in order to accommodate the cooktop.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.


Venting Options

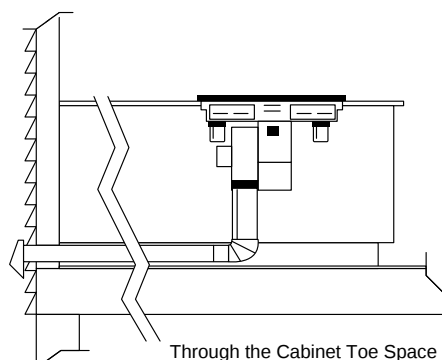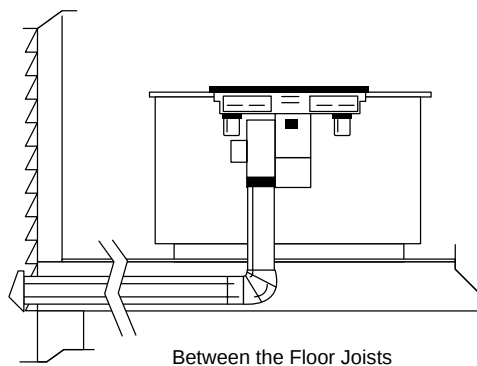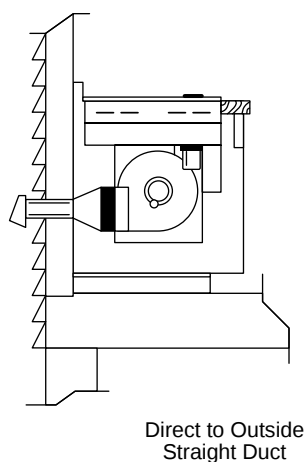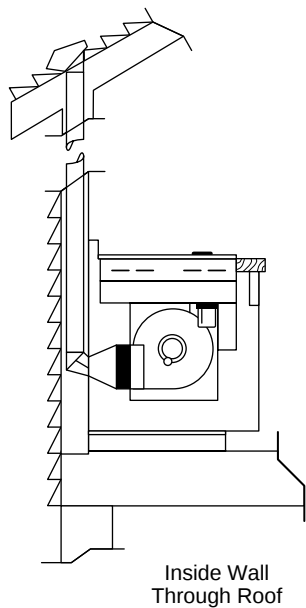

Downward Venting (in inches)

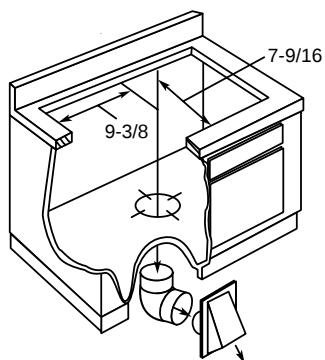

Rear Wall Venting (in inches)

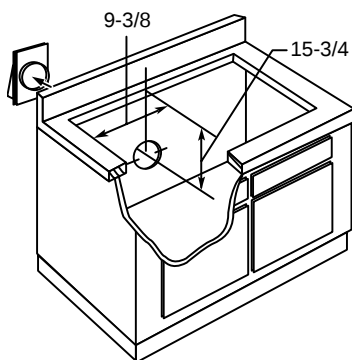



Installing the Ductwork

Use minimum 26-gauge galvanized or 24-gauge aluminum duct in 6" round or 3-1/4" x 10" size, or combination of both. **PVC duct or locally approved piping should be used if installing under a poured concrete slab.**

Note: Ductwork must be vented to outside. Do not vent into a wall, ceiling, crawlspace, attic or any concealed space. Always use an appropriate roof or wall cap with damper. **Laundry-type wall caps should never be used.** For maximum efficiency use the shortest and straightest duct run possible, with as few fittings as possible. For satisfactory performance the duct run should not exceed 100 feet equivalent length. Refer to the table of equivalent lengths (shown in Pub. No. 49-8552) for various duct configurations.

Built-In Cooktops: Downdraft Gas Modular

Model JGP389 (in inches)

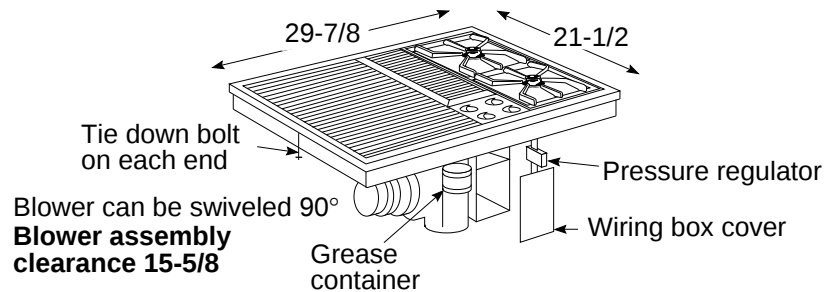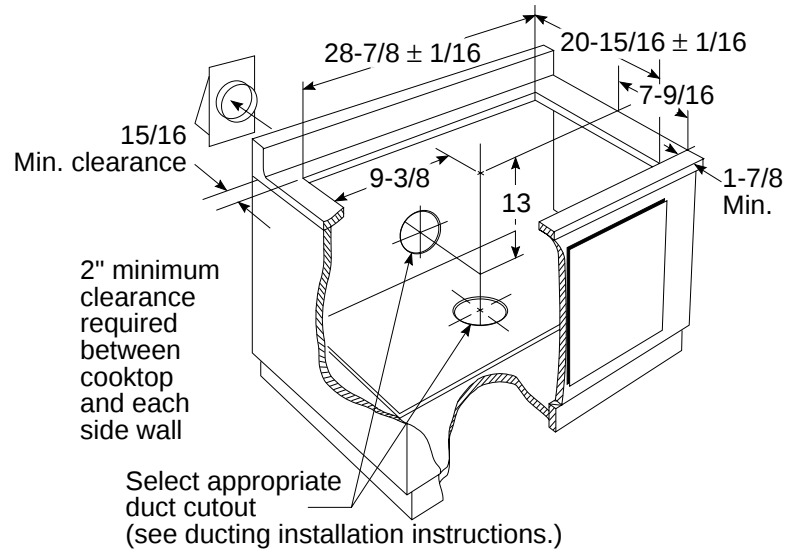

Optional Modules (Available at additional cost)

Two-Burner Gas Module
(standard burners)—
JXGB89W—White on white
JXGB89B—Black on black
Gas Grill Module—JXGG89
Griddle—JXGL89
(use with optional
Grill module)
Grill Cover—
JXGC89W—White on white
JXGC89B—Black on black

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

GE provides cooking inspiration through innovation.



**Frameless CleanDesign
Electric Cooktop**

GE Profile™ and GE® radiant cooktops make a dramatic difference in the kitchen, both in terms of style and performance. With a sleek, smooth surface and easy-to-use controls, these cooktops offer the best of both worlds.



Deep-Recessed Gas Cooktop

GE Profile and GE deep-recessed gas cooktops provide professional styling, along with many practical conveniences. Wide-ranging BTU output gives you precise control over heat intensity, while the porcelain cooking wells contain spills.



Gas-on-Glass Cooktop

GE Profile gas-on-glass cooktops offer sophistication in design and ease of cleaning. The frameless glass surface lends a clean, built-in look to your kitchen, and the sealed burners help keep spills from dripping.

Industry-leading service support from—



GE is the appliance brand most often mentioned among the brands rated as offering the best products and services in America.*

*Source: Louis Harris Poll – 2000

America's
#1
Preferred
Appliance
Brand

GEAppliances.com

Everything you want to know about GE appliances.

The GE Answer Center®

800.626.2000

Questions? Call anytime.

GE Genuine Parts

800.626.2002

Accessories to enhance, upgrade or fix it.

GE Appliance Service

800.432.2737

(800.GE.CARES)

Product service at your convenience.



GE Appliances

General Electric Company
Louisville, Kentucky 40225
GEAppliances.com



Listed by
Underwriters
Laboratories

Pub. No. 3-X191-1
PC32565

© 2002 General Electric Company

Before purchasing any appliance on which the Federal Trade Commission requires an energy label, read important energy cost and efficiency information available from your retailer.

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.