





Profile Performance Series™

JT950AAAA - GE Profile Performance™ 30" Double Wall Oven

Dimensions (in inches)

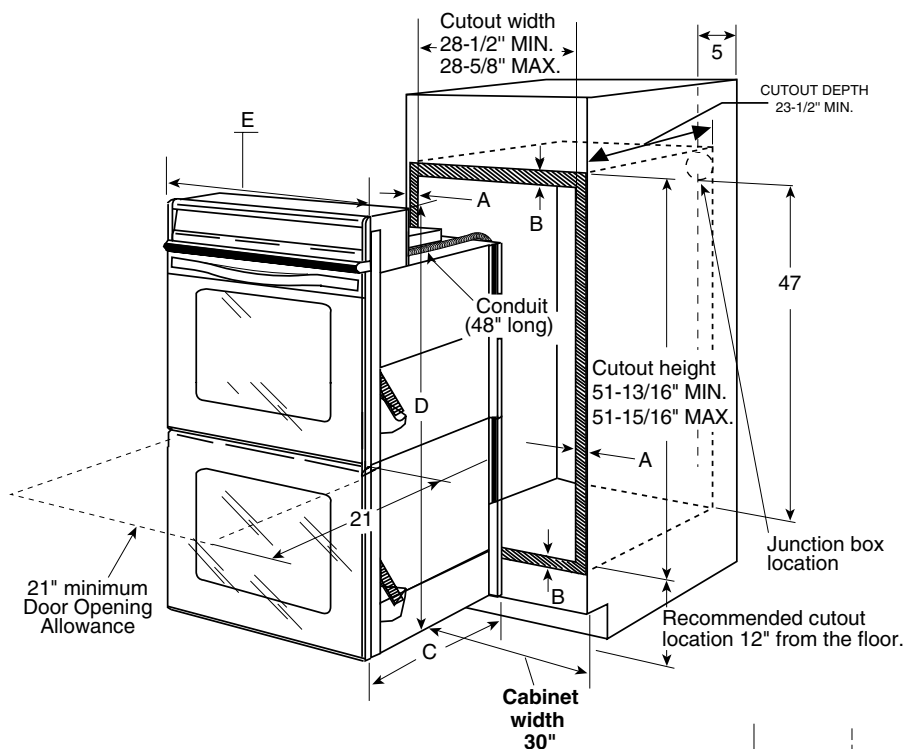

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT
THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE



Specification Revised 2/00

KW Rating	
240V	7.2
208V	5.4
Breaker Size	
240V	40 Amps [†]
208V	30 Amps [†]

Cabinet	30"
A – Overlap of Oven Over Side Edges of Cutout	11/16" – 3/4"
B – Overlap of Oven at Bottom of Cutout	1"
Oven	
C – Overall Depth	23-1/2"
D – Overall Height	52-15/16"
E – Overall Width	30"

[†]**Note:** Check local codes for required breaker size

Installation Information: Before installing, consult installation instructions [Pub. No. 31-10198] packed with product for current dimensional data.

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least 194°

For answers to your Monogram®,
GE Profile Performance Series™,
GE Profile™ or GE appliance questions, call
GE Answer Center® service, 800.626.2000.




Listed by
Underwriters
Laboratories



Profile Performance Series™

JT950AAAA - GE Profile Performance™ 30" Double Wall Oven

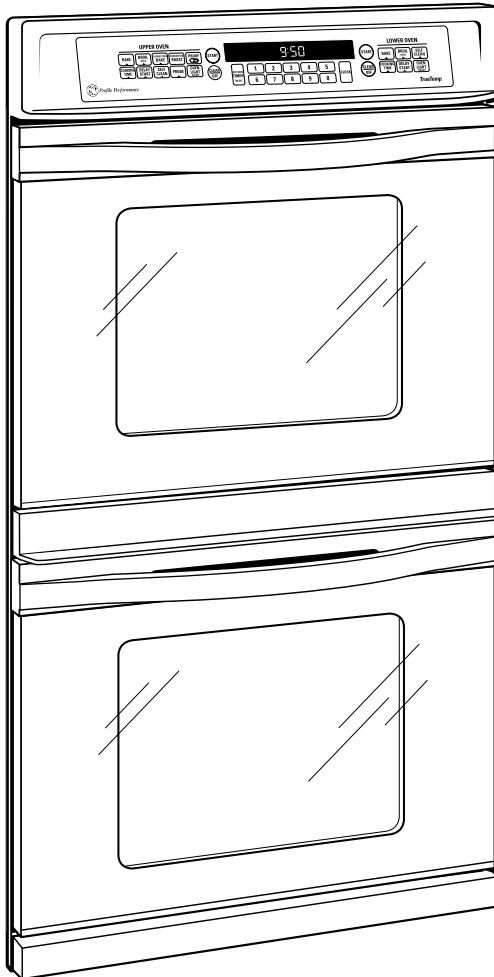

Features and Benefits

- TrueTemp™ System
- Convection Upper Oven:
 - Large 3.8 Cu.Ft. Self-Cleaning Oven w/ Delay Clean Option
 - 3 Oven Racks / 7 Embossed Rack Positions
 - Convection Bake
 - Convection Roast
 - Roasting Rack
- Bread Proofing Mode
- Baking Rack
- Thermal Lower Oven:
 - Large 4.2 Cu.Ft. Self-Cleaning Oven w/ Delay Clean Option
 - 2 Oven Racks / 6 Embossed Rack Positions
- SmartSet Electronic Oven Controls
- Automatic Meat Thermometer
- Variable Broil / Six-Pass Broil Element
- Hidden Bake Elements
- Broiler Pan with Grid
- Up-Front Oven Lights
- Big-View Windows
- Integrated Designer-Style Handles
- 30" Oven Cabinet Width Required
- Model JT950WAWW - White on white
- Model JT950BABB - Black on black
- Model JT950AAAA - Almond on almond
- Model JT950SASS - Stainless Steel
- Model JT950CACC - Bisque