





Profile Performance Series™

JVB96SASS - GE Profile Performance™ 36" Telescopic Downdraft System

Overall Dimensions (in inches)

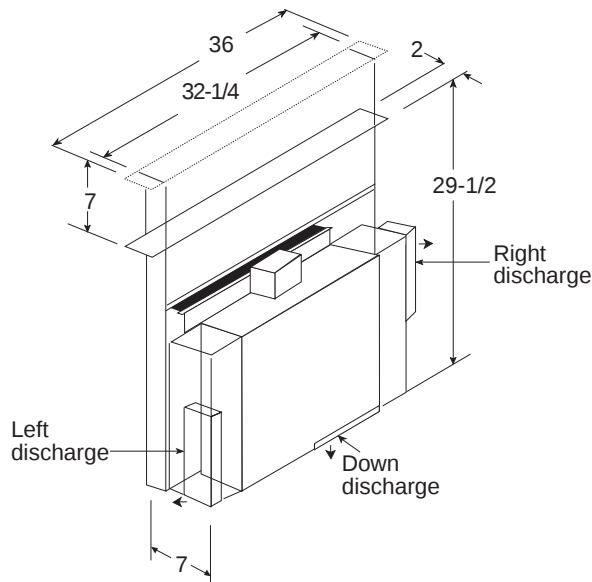


Counter Cutout Information

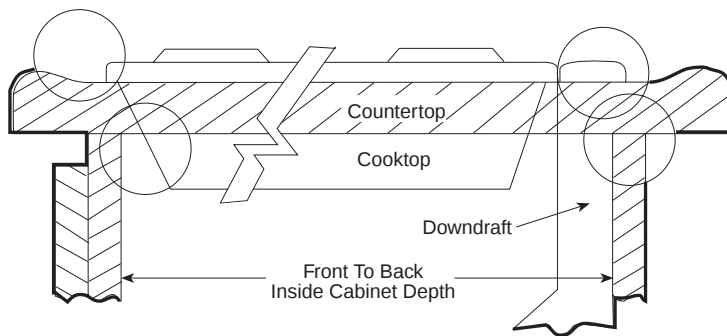

Revised 11/98

Venting Island to Outside Wall (in inches)

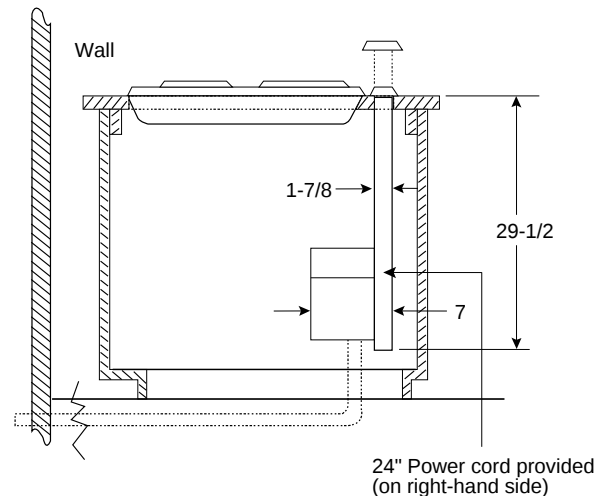

Important: A minimum 26" cabinet depth is required in the installation of a telescopic downdraft system. **Most standard cabinets are only 24" deep.**

Note: Dimensions shown are for reference only. Before cutting out countertop, refer to instructions packed **with downdraft and cooktop.**

Note: Duct run not to exceed 100 equivalent ft.

Note: Installation in cabinets/countertops against the wall will not be possible in most applications. Against the wall installations are limited to dimensions requirements. Refer to installation instructions packed with product for further details.

KW Rating

120V	4.0
------	-----

Note: Approved for use with the following GE cooktops—36" and 30" electric models, 36" and 30" gas sealed burner models and 36" and 30" induction models. **Not approved for use with standard burner gas cooktops.**

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

For answers to your Monogram®, GE Profile Performance Series™, GE Profile™ or GE appliance questions, call GE Answer Center® service, 800.626.2000.



Listed by
Underwriters
Laboratories




Profile Performance Series™

JVB96SASS - GE Profile Performance™ 36" Telescopic Downdraft System

Venting Duct Information

Duct Pieces	Equivalent Length*	Duct Pieces	Equivalent Length*
 6" Round Straight	1 ft. (per foot length)	 3-1/4" x 10" to 6" Round Transition	5 ft.
 3-1/4" x 10" Straight	1 ft. (per foot length)	 6" Round to 3-1/4" x 10" Transitions 90° Elbow	20 ft.
 6" 90° Elbow	15 ft.	 3-1/4" x 10" to 6" Round Transition 90° Elbow	12 ft.
 6" 45° Elbow	9 ft.	 6" Round Wall Cap with Damper	21 ft.
 3-1/4" x 10" 90° Elbow	16 ft.	 3-1/4" x 10" Wall Cap with Damper	27 ft.
 3-1/4" x 10" 45° Elbow	5 ft.	 6" Round Roof Cap	20 ft.
 3-1/4" x 10" 45° Elbow	24 ft.	 6" Round Roof Vent	24 ft.
 6" Round to 3-1/4" x 10" Transitions	7 ft.	SHOULD NOT EXCEED 100 EQUIVALENT FT. *Equivalent length of duct pieces are based on actual test conducted by GE Evaluation Engineering and reflect requirements for good venting performance with a downdraft rated at 500 CFM	

Plan the Ductwork

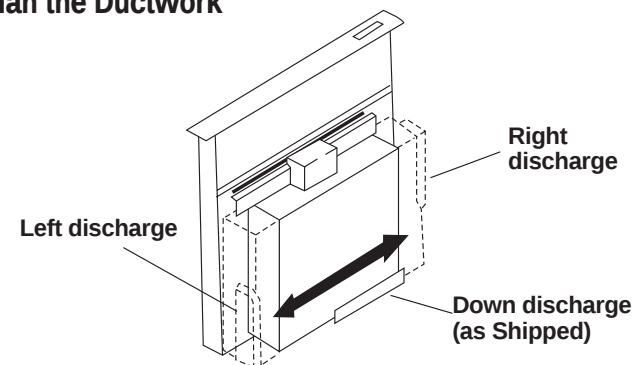

1. This downdraft blower system is designed for use with 3-1/4 " x 10" ductwork (can be transitioned to 6" round). Three different discharge directions are available with side-to-side adjustment for the accurate alignment of ductwork.
2. For best performance: choose the ducting option which allows the shortest length of ductwork and a minimum number of elbows and transitions. Check location of floor joists, wall joists, wall studs, electrical wiring or plumbing for possible interference.

Steps to Determine Flexible Ducting's Equivalent length

1. Measure the actual amount of offset (Maximum 3" recommended). The effect upon airflow is dependent upon the amount of offset.
2. Calculate the equivalent ducting allowances using:
 (___ in. offset) x (14 Ft. per inch)
 = ___ Ft. equivalent length.


For answers to your Monogram®,
 GE Profile Performance Series,™
 GE Profile™ or GE appliance questions, call
 GE Answer Center® service, 800.626.2000.





Profile Performance Series™

JVB96SASS - GE Profile Performance™ 36" Telescopic Downdraft System

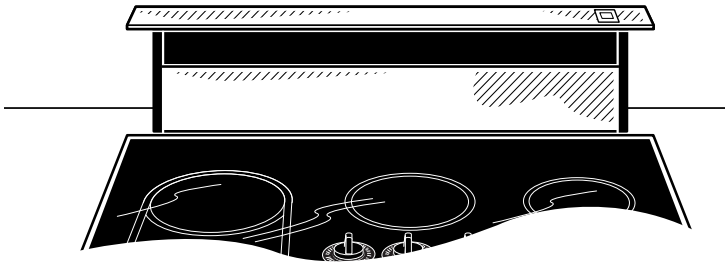

Features and Benefits

- 36" Telescopic Downdraft System
- 500 CFM Performance with Variable Speed Fan Control
- Raises to 7" Over Cooktop Surface
- Retracts When Not in Use
- Ideal for Island or Peninsula Installations
- 3-1/4" x 10" Rectangular Duct
- Model JVB96SASS - Stainless Steel