


KM 6360  
Induction Cooktop  
with PowerFlex cooking area for maximum versatility and performance.

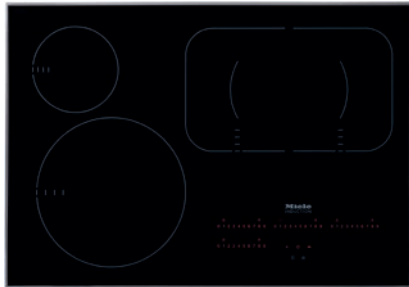


- Quick selection using numerical linear keybanks – Direct control plus
- Attractive design – 30 5/8 (775) in (mm) wide with stainless steel frame
- Versatile and fast – 4 cooking zones incl. 1 PowerFlex area
- Communication with the ventilation hood – automatic Con@ctivity function
- Broad performance spectrum – keep warm function and TwinBoost

EAN: 4002515472910 / Material number: 09775890 / Old Material Number: 26636052USA

<b>Heating type</b>	
Fuel type	Induction
<b>Design</b>	
Independent of oven	•
<b>Design</b>	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Stainless steel frame	•
Print design	LightPrint
Proud installation	•
<b>Cooking zone details</b>	
No. of rings	4
<b>PowerFlex cooking zones</b>	
No.	2
Diameter in inches	Ø 150 – 230
Power in W	2200
Booster in W	3100
TwinBooster in W	3850
<b>1st cooking zone/cooking area</b>	
Position	front left
Type	Variable cooking zone
Size in mm	Ø 180-280
Max. Booster power rating in W	3100
Max. rating in W	2500
<b>2nd cooking zone/cooking area</b>	
Position	rear left
Type	Variable cooking zone
Size in mm	Ø 100-160
Max. Booster power rating in W	1900
Max. rating in W	1450
<b>3rd cooking zone/cooking area</b>	
Position	Rear center right
Type	PowerFlex bridge
Size in mm	230x390
Max. Booster power rating in W	5000
Max. rating in W	3550
Max. TwinBooster power rating in W	7700
<b>User convenience</b>	
Operation via sensor controls	Multiple direct dial
Automatic function	Con@ctivity 2.0
Pan and pan size recognition	•
Display colour	Red
Auto heat-up	•
Keeping warm	•
Stop & Go function	•
Safety switch-off	•
Individual setting options (e.g. buzzers)	•
Minute minder	•
<b>Cleaning convenience</b>	
Easy to clean ceramic glass	•


KM 6360  
 Induction Cooktop  
 with PowerFlex cooking area for maximum versatility and performance.

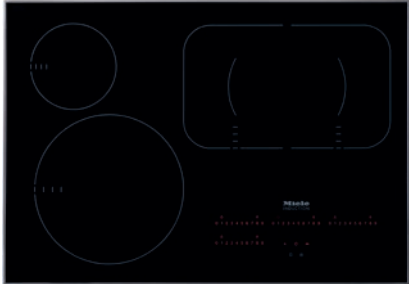

EAN: 4002515472910 / Material number: 09775890 / Old Material Number: 26636052USA

Safety	
Safety cut-out	•
Lock function	•
System lock	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions (width) in in. (mm)	30 5/8 (775)
Dimensions (height) in in. (mm)	5 1/8 (128)
Dimensions in mm (depth)	21 1/2 (544)
Cutout dimensions (width) in in. (mm)	28 5/8 (724)
Cutout dimensions (depth) in in. (mm)	20 1/2 (518)
Casing height incl. connection box in mm	4 7/8 (121)
Weight in lbs. (kg)	46 (21)
Total connected load in kW	7.70
Power cord length in in. (m)	3 (1.2)
Voltage in V	240
Frequency in Hz	60
Standard accessories	
Power cord	Yes

KM 6360  
 Induction Cooktop  
 with PowerFlex cooking area for maximum versatility and performance.

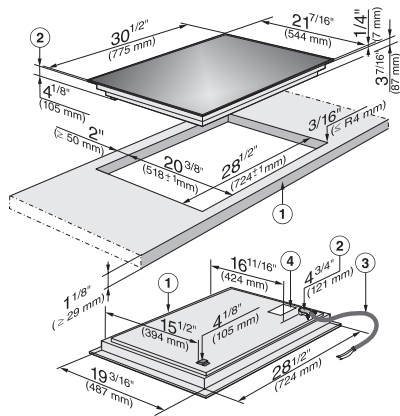

KM 6360 (Installation drawing)

1) Front, 2) Casing depth, 3) Flexible metal Extension hose  
 L = 47 1/4" (1200 mm), 4) Data plate