


KM 6365

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

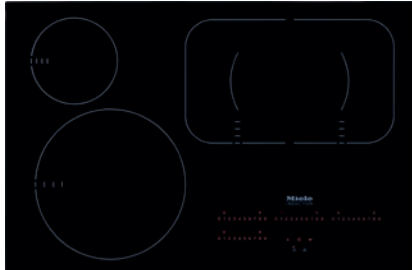

- Quick selection using numerical linear keybanks – Direct control plus
- Modern design – 30 3/8 (770) in (mm) wide for flush-mounted installation
- Versatile and fast – 4 cooking zones incl. 1 PowerFlex area
- Shortest heating-up times – TwinBooster
- Food always cooked to perfection – keeping warm function


EAN: 4002515472927 / Material number: 09775900 / Old Material Number: 26636562USA

| | |
|--------------------------------------|-----------------------|
| Heating type | |
| Fuel type | Induction |
| Design | |
| Independent of oven | • |
| Design | |
| Elegant glass ceramic surface | • |
| Flush | • |
| Ceramic surface colour | Black |
| Print design | LightPrint |
| Cooking zone details | |
| No. of rings | 4 |
| PowerFlex cooking zones | |
| No. | 2 |
| Diameter in inches | Ø 150 – 230 |
| Power in W | 2200 |
| Booster in W | 3100 |
| TwinBooster in W | 3850 |
| 1st cooking zone/cooking area | |
| Position | front left |
| Type | Variable cooking zone |
| Size in mm | Ø 180-280 |
| Max. Booster power rating in W | 3100 |
| Max. rating in W | 2500 |
| 2nd cooking zone/cooking area | |
| Position | rear left |
| Type | Variable cooking zone |
| Size in mm | Ø 100-180 |
| Max. Booster power rating in W | 1900 |
| Max. rating in W | 1450 |
| 3rd cooking zone/cooking area | |
| Position | Rear center right |
| Type | PowerFlex bridge |
| Size in mm | 230x390 |
| Max. Booster power rating in W | 5000 |
| Max. rating in W | 3550 |
| Max. TwinBooster power rating in W | 7700 |
| User convenience | |
| Operation via sensor controls | Multiple direct dial |
| Automatic function | Con@ctivity 2.0 |
| Pan and pan size recognition | • |
| Display colour | Red |
| Auto heat-up | • |
| Keeping warm | • |
| Stop & Go function | • |
| Safety switch-off | • |
| Minute minder | • |
| Cleaning convenience | |
| Easy to clean ceramic glass | • |
| Safety | |
| Safety cut-out | • |

KM 6365

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

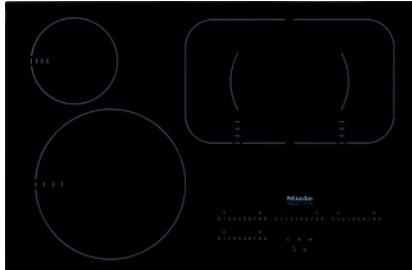


EAN: 4002515472927 / Material number: 09775900 / Old Material Number: 26636562USA

| | |
|-------------------------|---|
| Lock function | • |
| System lock | • |
| Overheating protection | • |
| Residual heat indicator | • |


| Technical data | |
|--|--------------|
| Dimensions (width) in in. (mm) | 30 3/8 (770) |
| Dimensions (height) in in. (mm) | 4 7/8 (121) |
| Dimensions in mm (depth) | 20 1/4 (512) |
| Casing height incl. connection box in mm | 5 1/8 (128) |
| Internal cutout dimensions in mm (width) with flush installation | 748 |
| Internal cutout dimensions in mm (depth) with flush installation | 490 |
| Weight in lbs. (kg) | 46 (21) |
| External cutout dimensions in mm (width) with flush installation | 774 |
| External cutout dimensions in mm (depth) with flush installation | 516 |
| Total connected load in kW | 7.70 |
| Voltage in V | 240 |
| Frequency in Hz | 60 |
| Standard accessories | |
| Power cord | Yes |

KM 6365
 Induction Cooktop
 with PowerFlex cooking area for maximum versatility and performance.

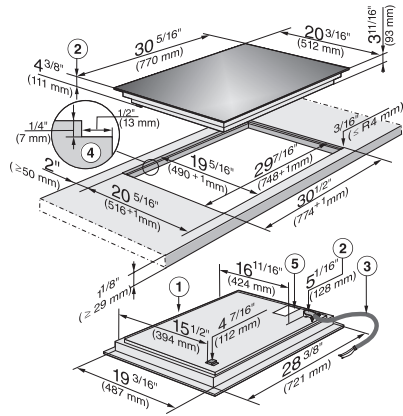


KM 6365 (Installation drawing)

1) Front, 2) Casing depth, 3) Flexible metal Extension hose
 L = 47 1/4" (1200 mm), 4) Stepped cut-out, 5) Data plate

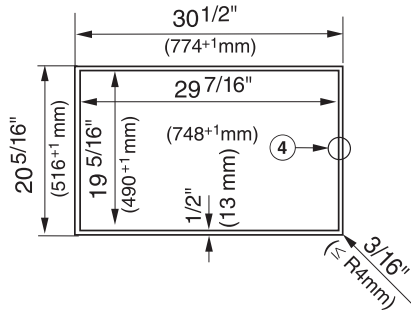


KM 6365 (Installation drawing)

4) Wooden frame 1/2" / 13 mm (not supplied with appliance)

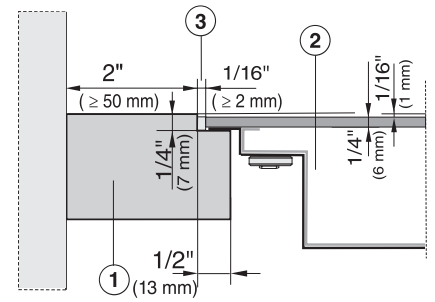

KM 6365 (Installation drawing)

1) Worktop, 2) Hob, 3) Width of gap

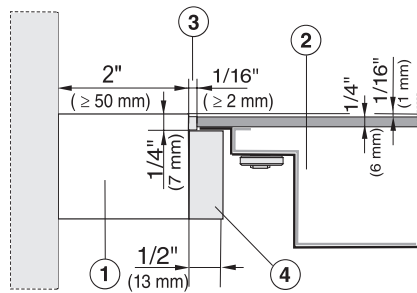

KM 6365 (Installation drawing)

1) Worktop, 2) Hob, 3) Width of gap, 4) Wooden frame 1/2" / 13 mm (not supplied with appliance)