



24" Marvel Dispensers for Beer or Wine

Model # ML24BN

Performance

- Dynamic cooling technology delivers rapid cool down, frost-free operation and precise temperature stability
- Integrated drain system keeps spillage under control and removable components make for easier cleaning
- Double-insulated tower reduces foam on pour and prevents condensation
- Now even quieter operation thanks to exclusive design enhancements to buffer and minimize sound

Storage Capabilities

- 5.7 cu. ft. capacity
- The original dispenser to store half kegs, tall quarter kegs, pony kegs, sixth barrels, Cornelius kegs, growlers, bottles or cans
- Lo-Boy coupler makes it easier to store, tap and swap out tall U.S. type D half barrels
- (2) stow-on-board, commercial-grade stainless-steel shelves convert unit to a full refrigerator to store perishables
- Secure gas tank storage area and drain basin
- Anti-scuff interior floor shield and stainless steel threshold protect against cabinet wear and tear from loading and unloading kegs
- Rear port gives external gas tank option

Touchpad Controls

- Multifunction Marvel Intuit™ Integrated Controls allow you to select a precise cabinet temperature from 34° F to 60° F

Aesthetics

- Finished cabinet for built-in or freestanding installation
- Beer and wine tap kits with single or twin tap options
- Easy-to-install panel overlay model features soft-close integrated hinge for a truly flush fit with cabinetry
- Finish options: stainless steel, black or overlay (panel ready)

Additional Convenience

- Close Door Assist System™ gently and automatically draws door to a close, ensuring door is never accidentally left ajar
- Black toe kick adjustable to 4" with leveling legs
- 1-year parts and labor warranty, 5-year sealed system parts warranty

Finish Options



Stainless Steel



Solid Overlay
(Panel Ready)*



Black



Ordering Options

STEP ONE: CHOOSE YOUR BUILT-IN CABINET

Black Door, Right Hinge	ML24BNS2RB
Black Door, Left Hinge	ML24BNS2LB
Stainless Steel Door, Right Hinge	ML24BNS2RS
Stainless Steel Door, Left Hinge	ML24BNS2LS
Panel-Ready Overlay Door, Integrated Right Hinge (Handle Not Included)*	ML24BNP3RP
Panel-Ready Overlay Door, Integrated Left Hinge (Handle Not Included)*	ML24BNP3LP

STEP TWO: CHOOSE YOUR TAP†


Wine Single Tap Kit with Nitro Tank and Fittings	S42418647-ACCY
Wine Twin Tap Kit with Nitro Tank and Fittings	S42418648-ACCY
Beer Single Tap Kit with CO ₂ Tank and Fittings	S42418645-ACCY
Beer Twin Tap Kit with CO ₂ Tank and Fittings	S42418646-ACCY

*Easy installation! No panel kit required. Consult your cabinet maker for overlay panel and handle options.


†Includes tower/tap, regulator, Lo-Boy copuler, gas hose, hose clamps, faucet wrench, tower gasket, tower mounting screws, gas tank, drain pan for undercounter installation



Product Dimensions

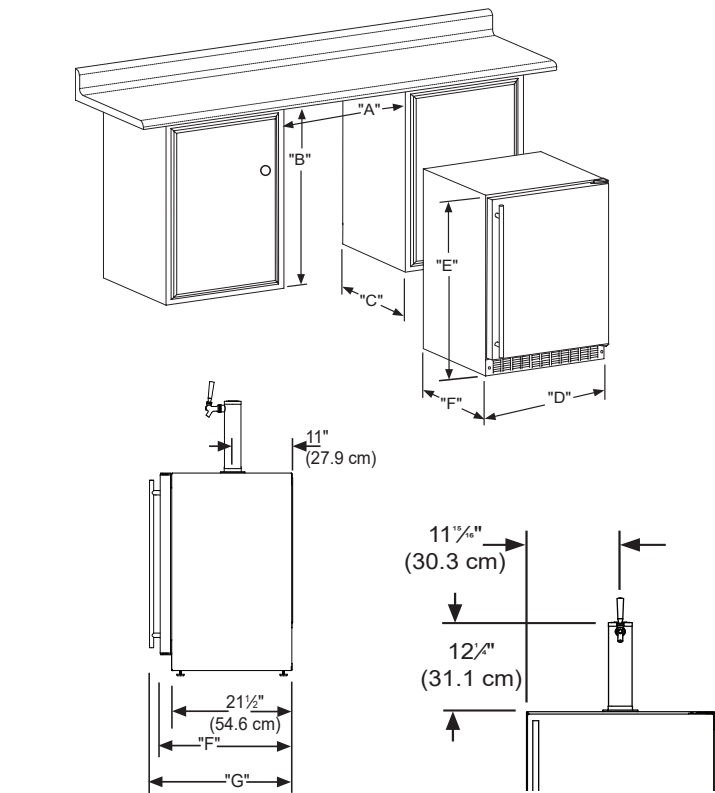

Panel Overlay Dimensions

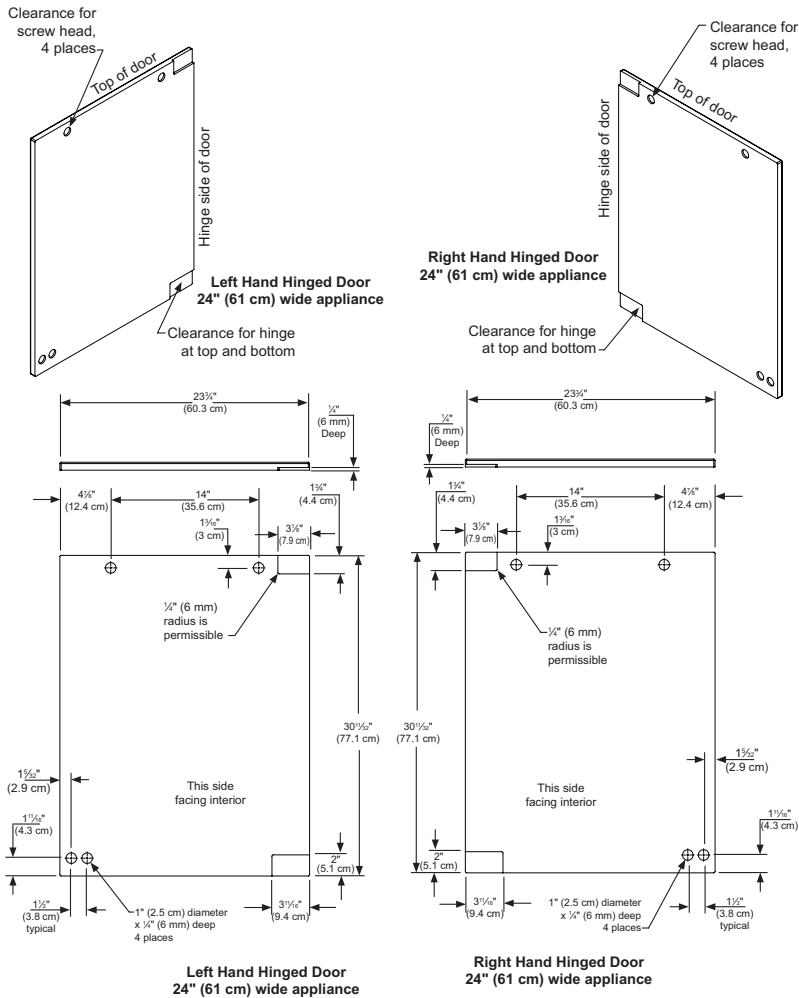

Rough-In Dimensions

A. Rough-In Width	24"	
B. Rough-In Height	Solid Door	34" to 35"
	Overlay Door	34 1/4" to 35 1/4"
C. Rough-In Depth	24"	

Product Dimensions

D. Width	23 7/8"	
E. Height	Solid Door	33 3/4" to 34 3/4"
	Overlay Door	34" to 35"
Depth to Front of Case	21 1/2"	
F. Depth to Front of Door	Solid Door	23 23/32"
	Overlay Door	22 7/8" Without Handle
G. Depth to Handle	25 21/32" (Stainless Steel, Black)	
Depth with door at 90°	Solid Door	46 13/32"
	Overlay Door	46 1/2"

Product Features

Interior Cabinet Finish	White
Capacity	5.7 cu. ft. Half kegs, tall quarter kegs, pony kegs, sixth barrels, Cornelius kegs, growlers, bottles / cans
Shelving System	Stow-on-board
Shelf Fronts	Stainless steel
Other Storage	CO ₂ tank (beer tap kit) Nitro tank (wine tap kit)
Interior Lighting	NA
Toe Grill Finish	Black
Hinge	Classic Hinge (Integrated Hinge on Panel Overlay Model)
Handle	Slim Designer Handle (Panel Overlay Does Not Include Handle)
Control Type	Intuit™
Temperature Range	34° to 60° F
Lock	No
Electrical Requirements	120V / 60Hz / 15A
Length of Power Cord	6'
Shipping Weight	160 lbs
Finishes	Stainless Steel, Black, Overlay
Vacation Mode	Yes
Agency Approvals	CSA

For comprehensive installation instructions, please visit www.marvelrefrigeration.com to access the owner's guide.