



# 24" Marvel Dual Zone Wine and Beverage Center with 3-in-1 Split Convertible Shelf™

Model # ML24WB

## Performance

- Two independently-controlled temperature zones offers dual options for wine and beverage storage
- Upper zone environment is ideal for wine storage (45° F to 60° F) and the lower zone is designed for beverages and perishables (34° F to 42° F)
- Dynamic Cooling Technology™ delivers the industry's best temperature stability and rapid cool down, safely bringing wine to temperature without compromising integrity
- Vibration Neutralization System™ protects wine from agitation, allowing it to come to full maturation
- Thermal-efficient cabinet ensures optimum preservation and energy efficiency while maximizing capacity
- Argon-filled, UV-resistant tinted dual pane glass door protects contents from damaging ultraviolet light, while conserving energy
- Now even quieter operation thanks to exclusive design enhancements to buffer and minimize sound

## Storage Capabilities

- 5.1 total cu. ft.
  - 1.85 cu. ft. upper zone stores 16 bottles of wine on (2) 8-bottle roller-glide wine racks with heavy-gauge wire to safely cradle each wine bottle
  - 3.27 cu. ft. lower zone can hold (112) 12-oz cans, (64) longneck bottles or an additional 6 wine bottles
  - 3-in-1 Split Convertible Shelf™ offers cantilevered glass shelving that converts to 3 or 6-bottle wine rack

## Touchpad Controls

- Multifunction Marvel Intuit™ Integrated Controls feature convenient settings for the ultimate programmability and allow you to select a precise temperature for each zone
- Vacation mode conserves energy during times when the unit is not in use

## Aesthetics

- Two-stage, arctic white theater-style LED lighting and midnight black interior
- Solid black shelf fronts
- Easy-to-install panel overlay option features soft-close integrated hinge for a truly flush fit with cabinetry
- Finish options: stainless steel or overlay (panel ready)

## Additional Convenience

- Close Door Assist System™ gently and automatically draws door to a close, ensuring door is never accidentally left ajar
- Black toe kick adjustable to 4" with leveling legs
- 1-year parts and labor warranty, 5-year sealed system parts warranty



## Ordering Options

|                                                                              |            |
|------------------------------------------------------------------------------|------------|
| Stainless Frame Glass Door, Right Hinge                                      | ML24WBG1RS |
| Stainless Frame Glass Door, Left Hinge                                       | ML24WBG1LS |
| Panel-Ready Framed Glass Door, Integrated Right Hinge (Handle Not Included)* | ML24WBF2RP |
| Panel-Ready Framed Glass Door, Integrated Left Hinge (Handle Not Included)*  | ML24WBF2LP |
| Panel-Ready Solid Overlay Door, Integrated Right Hinge                       | ML24WBP2RP |
| Panel-Ready Solid Overlay Door, Integrated Left Hinge                        | ML24WBP2LP |

\*Easy installation! No panel kit required. Consult your cabinet maker for overlay panel and handle options.



## Finish



Stainless Steel Finish




Framed Overlay (Panel Ready)\*




Solid Overlay (Panel Ready)\*

Product Dimensions (Framed Door)

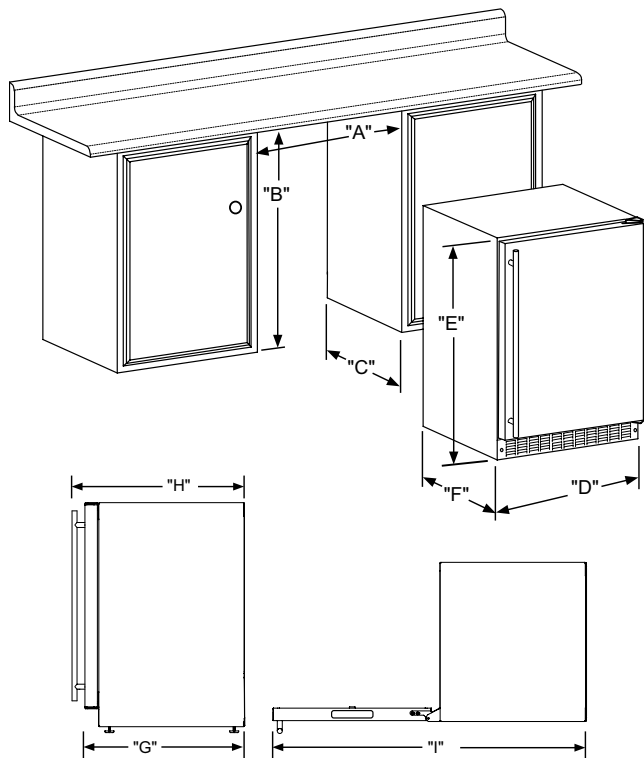

Panel Overlay Dimensions (Framed Door)

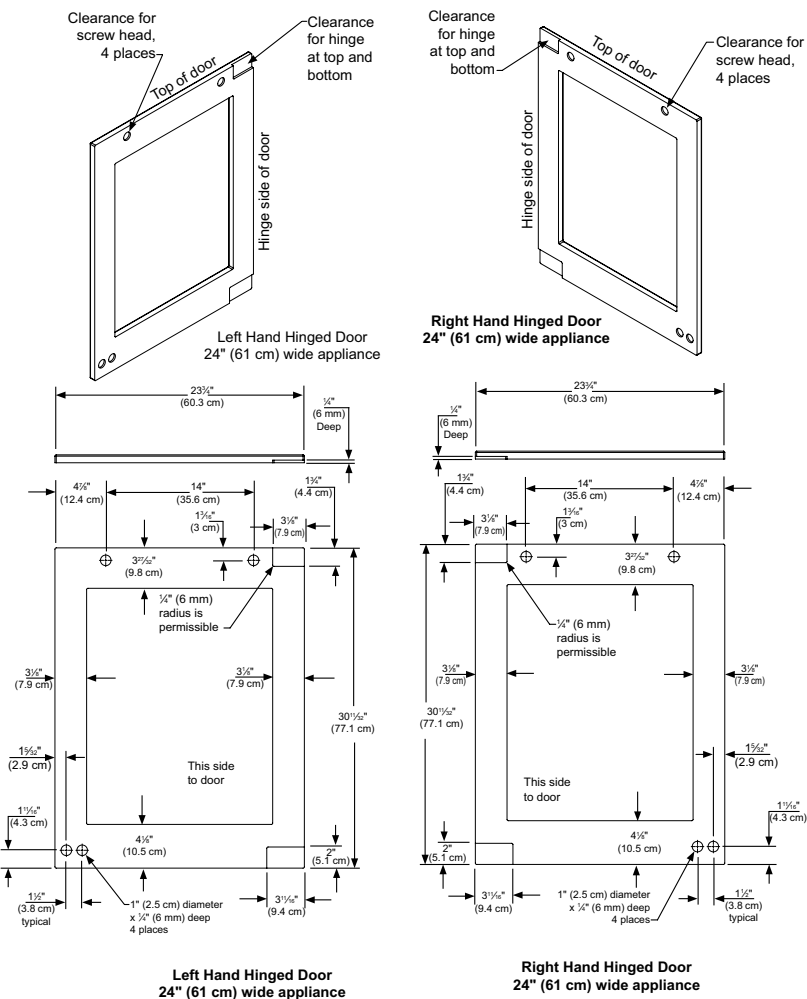

Rough-In Dimensions

|                    |              |                    |
|--------------------|--------------|--------------------|
| A. Rough-In Width  | 24"          |                    |
| B. Rough-In Height | Solid Door   | 34" to 35"         |
|                    | Overlay Door | 34" 1/4 to 35" 1/4 |
| C. Rough-In Depth  | 24"          |                    |

Product Dimensions


|                           |                             |                        |
|---------------------------|-----------------------------|------------------------|
| D. Width                  | 23 7/8"                     |                        |
| E. Height                 | Solid Door                  | 33 3/4" to 34 3/4"     |
|                           | Overlay Door                | 34" to 35"             |
| F. Depth                  | 21 1/2                      |                        |
| G. Depth to Front of Door | Solid Door                  | 23 23/32"              |
|                           | Overlay Door                | 22 7/8" Without Handle |
| H. Depth to Handle        | 25 21/32" (Stainless Steel) |                        |
| I. Depth with door at 90° | Solid Door                  | 46 13/32"              |
|                           | Overlay Door                | 46 1/2"                |

Product Features



|                         |                                                                             |
|-------------------------|-----------------------------------------------------------------------------|
| Interior Cabinet Finish | Black                                                                       |
| Capacity                | Upper Zone:<br>Up to 16 wine bottles<br>Lower Zone:<br>Up to 112 12-oz cans |
| Shelving System         | Roller-Glide System                                                         |
| Shelf Fronts            | Black                                                                       |
| Other Storage           | Bottom Storage                                                              |
| Interior Lighting       | White LED                                                                   |
| Toe Grill Finish        | Black                                                                       |
| Hinge                   | Classic Hinge                                                               |
| Handle                  | Slim Designer Handle<br>(Panel Overlay Does Not Include Handle)             |
| Control Type            | Intuit™                                                                     |
| Temperature Range       | Upper Zone: 45° to 60° F<br>Lower Zone: 34° to 42° F                        |
| Lock                    | No                                                                          |
| Electrical Requirements | 120V / 60Hz / 15A                                                           |
| Length of Power Cord    | 6'                                                                          |
| Shipping Weight         | 160 lbs                                                                     |
| Finishes                | Stainless Steel, Overlay                                                    |
| Vacation Mode           | Yes                                                                         |
| Agency Approvals        | CSA, ENERGY STAR                                                            |

For comprehensive installation instructions, please visit [www.marvelrefrigeration.com](http://www.marvelrefrigeration.com) to access the owner's guide.


# Panel Overlay Dimensions (Solid Door)

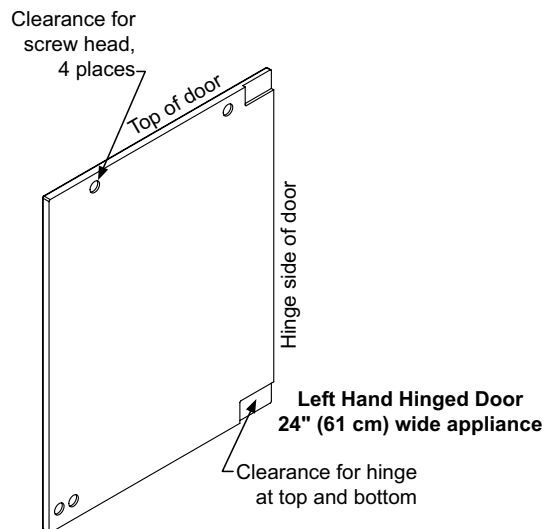

**Right Hand Hinged Door**  
24" (61 cm) wide appliance

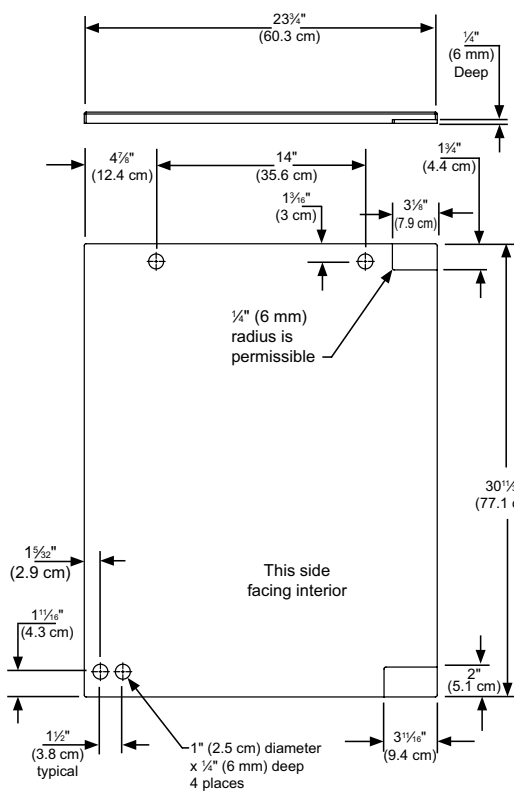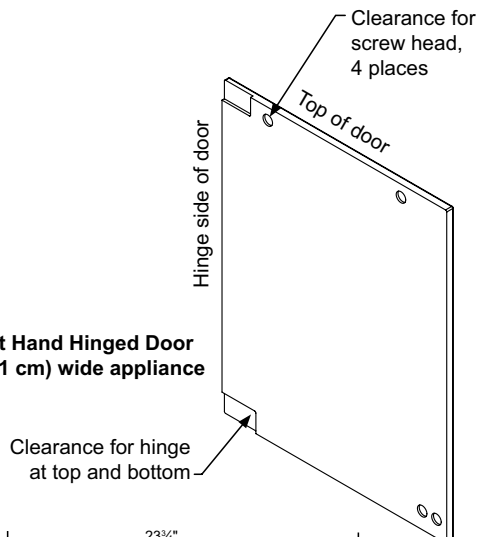

**Left Hand Hinged Door**  
24" (61 cm) wide appliance

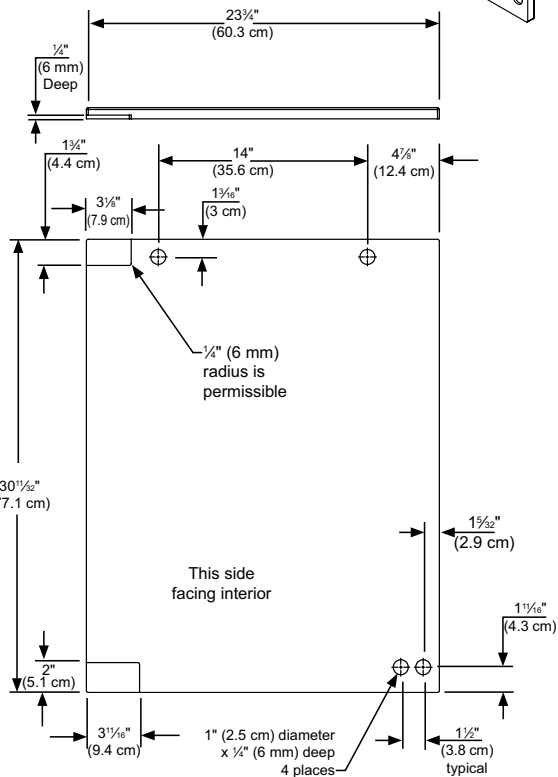

**Right Hand Hinged Door**  
24" (61 cm) wide appliance

For comprehensive installation instructions, please visit [www.marvelrefrigeration.com](http://www.marvelrefrigeration.com) to access the owner's guide.