



HIGH-VALUE FEATURES IN AN ECONOMICAL PACKAGE

4.1 Cu. Ft Impeller Washer

MLV41N1AWW White

The Midea Impeller Top Load Washer features a large, 4.1 Cu. Ft. capacity and 8 pre-set cycles including extra rinse and soak options, a stainless-steel tub and a look-through lid.

Large, 4.1 Cu. Ft. Capacity

The larger tub sizes let you fit more towels and sheets in a single load saving time and effort.

Look-Through Lid

Easily see where your laundry is in the cycle without opening the lid and stopping the washer.

8 Pre-set Cycles

A variety of pre-sets let you match the cycle to the garments you're washing: Normal, Delicate, Heavy Duty, Drain and Spin, Rinse and Spin, Bulky Items, Tub Clean, Quick Wash.

4.1 Cu. Ft. Impeller Washer

Model MLV41N1AWW



SPECIFICATIONS

Models		MLV41N1AWW
UPC		810004812536
Color		White
PERFORMANCE		
DOE		Yes
ENERGY STAR®		-
IMEF (cu. ft./kWh/cycle)		1.57
IWF (gallons/cycle/cu. ft.)		6.5
Max Spin Speed (RPM)		680
Vibration Reduction		Yes
UL Certification		Yes
FEATURES		
Capacity (cu. ft.)		4.1
No. of Cycles		8 (Normal, Delicate, Heavy Duty, Drain & Spin, Rinse & Spin, Bulky Items, Tub Clean, Quick Wash)
No. of Options		6 (Delay, Child Lock, Soak, Extra Rinse, Fabric Softener, Water Plus)
Automatic Temperature Control		Yes
Automatic Load Sensing		Yes
No. of Soil Levels		4 (Extra Heavy, Heavy, Medium, Light)
No. of Temperature Selections		4 (Hot, Warm, Cold Tap, Cold)
Detergent Dispenser		Bleach, Softener
Delay Start		Yes, up to 24 hours
Child Lock		Yes
Water Plus		Yes
Extra Rinse		Yes
Soak		Yes
Safe Shut Lid		Yes
Time-Remaining Display		Yes
End-Of-Cycle Signal		Yes
ELECTRICAL		
Power Supply		120V/60hz
Input Power (W)		600
Amperage (A)		10
UL Listed		Yes
Power Cord Included		Yes
PHYSICAL ATTRIBUTES		
Tub/Drum Material		Stainless Steel
Included Accessories		Drain Hose, Hose Holder, Hose Clamp & Screw
Control Panel		Dial / Membrane
Lid / Trim		Glass / White
Color		White
Dimensions (W*D*H)	in	27 x 28.1 x 43.3
	cm	68.6 x 71.4 x 110
Warranty		Parts & Labor, 1 Year

4.1 Cu. Ft Impeller Washer & 6.7 Cu. Ft. Front Load Dryer

Models MLV41N1AWW, MLE41N1AWW, MLG41N1AWW


Alcove or Closet or Wall Insert/Recessed Installations

Minimum clearances between the unit and adjacent walls or other surfaces:

Sides (in / cm)	1 / 2.5	Rear (in / cm)	6 / 15.2
Top (in / cm)	24 / 61	Closet Front (in / cm)	2 / 5.1
Gap between the end of water valve and the wall (in / cm)		5 / 12.7	

If installing in an alcove or closet, minimum clearances for closet door:

Minimum total area of two unobstructed air openings (in ² / cm ²)	72 / 465	Minimum clearance at the top and bottom (in / cm)	3 / 7.6
--	----------	---	---------

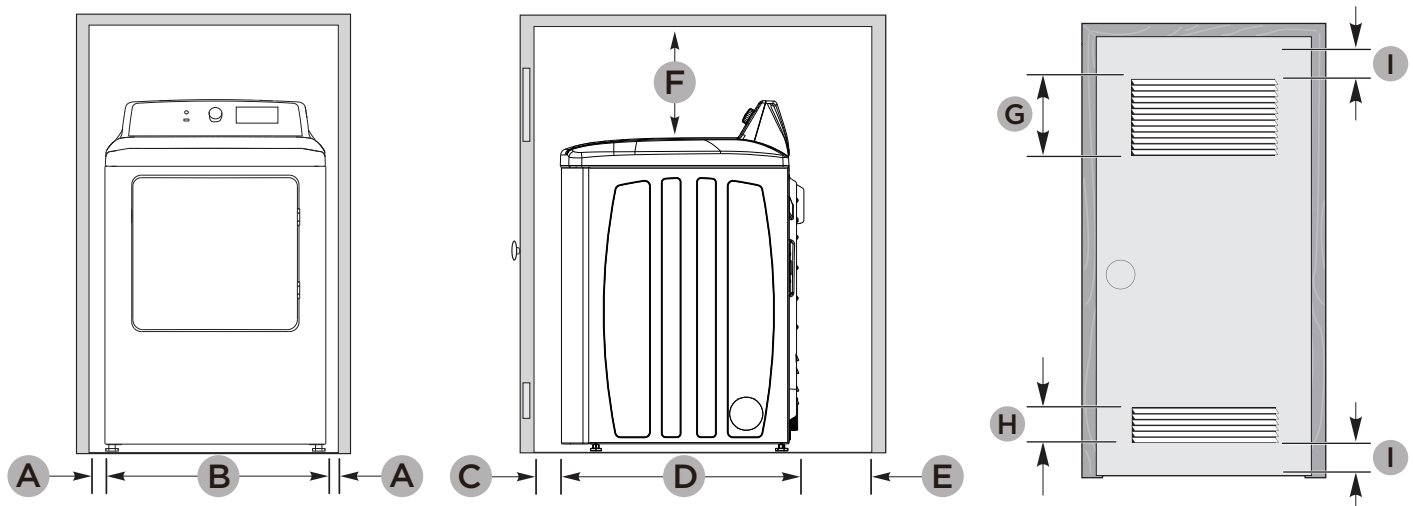

A (in / cm)	1 / 2.5	D (in / cm)	30.1 / 76.5	G (in ² / cm ²)	48 / 310
B (in / cm)	27 / 68.6	E (in / cm)	5 / 12.7	H (in ² / cm ²)	24 / 155
C (in / cm)	2 / 5.1	F (in / cm)	24 / 61	I (in / cm)	3 / 7.6

WARNING

- The dryer must be exhausted to the outside to reduce risk of fire when installed any place inside the house.
- No other fuel-burning appliance should be installed in the same closet as the dryer.