



15" Marvel Outdoor Crescent Ice Machine

Model # MO15CRS1XS

Performance

- Now produces up to 25 lbs of crescent ice per day
- Minimizes water usage, only 3 gallons average daily rate
- Daily ice production rate nearly 4x greater than standard household ice maker
- Certified for outdoor use to withstand elements like rain, corrosion, high humidity and heat
- Designed to operate in temperatures from 50° to 100° F
- Thermal-efficient insulated cabinet ensures optimum energy efficiency and cooling performance
- Crescent ice cube dimensions: 1/2" W x 3/4" H x 2 1/4" L

Storage Capabilities

- Stores 25 lbs of crescent ice
- Removable ice bin for convenient access and easier cleaning

Aesthetics

- Corrosion-resistant stainless steel exterior, sturdy pro-style handle and rugged stainless steel toe kick
- Finish: stainless steel

Additional Convenience

- No pump or drain required
- Field reversible door for added flexibility
- On/Off switch within quick reach at the front of the unit
- Four 1" leveling legs are independently adjustable for precise built-in installation
- 1-year parts and labor warranty, 5-year sealed system parts warranty



Ordering Option

Solid Stainless Steel Door, Field Reversible, Stainless Professional Handle


MO15CRS1XS

Finish




Stainless Steel



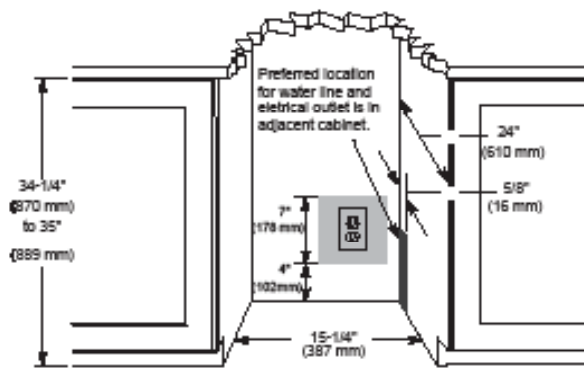

Rough-In Dimensions

Rough-In Width	15 1/4"
Rough-In Height	34 1/4" to 35"
Rough-In Depth	24"

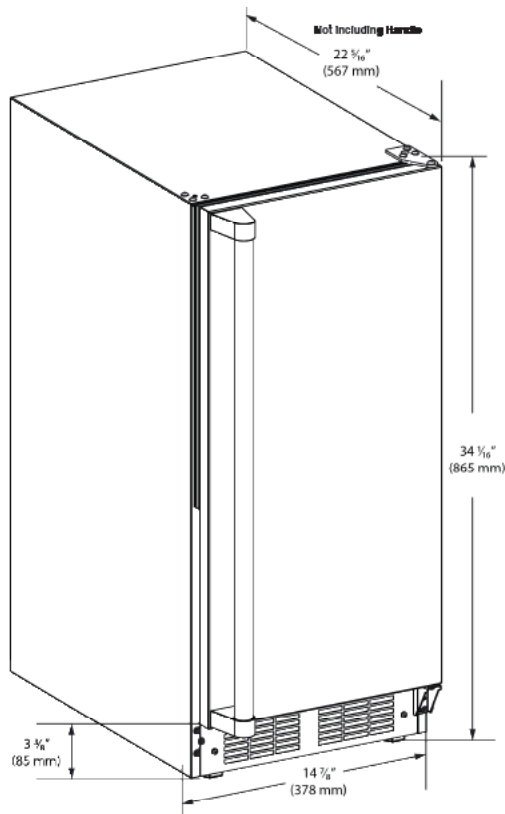

Product Dimensions

Width	14 7/8"
Height	34 1/16" to 35 1/16"
Depth of Cabinet	20 3/4"
Depth to Front of Door	22 5/16"
Depth to Handle	25 7/8"
Depth with door at 90°	36 7/8"

Product Features

Interior Cabinet Finish	White
Capacity	Up to 25 lbs of crescent ice
Shelving System	NA
Shelf Fronts	NA
Other Storage	Ice Bin
Interior Lighting	NA
Toe Grill Finish	Stainless Steel
Hinge	Classic Hinge
Handle	Professional
Control Type	NA
Temperature Range	NA
Lock	No
Electrical Requirements	115V / 60Hz / 15A
Length of Power Cord	6'
Product Weight	83 lbs
Shipping Weight	90 lbs
Finishes	Stainless Steel
Vacation Mode	No
Agency Approvals	UL