


Series 6, Induction Cooktop, 36", Black, Without Frame NIT8666UC

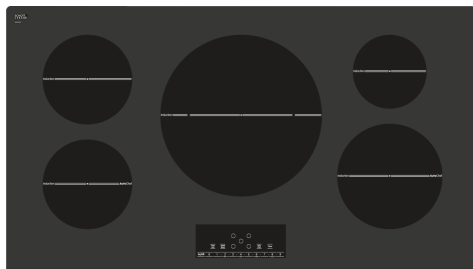

HEZ390210	System pan diameter 15 cm
HEZ390220	System pan diameter 19 cm
HEZ390230	System pan diameter 21cm

The 800 Induction Cooktop is Sleek in Design, and Features AutoChef® Technology Which Maintains Precise Cooking Temperatures.

- **DirectSelect:** direct, simple selection of the desired cooking zone, power and additional functions.
- **PerfectFry:** no more worrying about scorching.
- **Power Boost:** up to 35% faster heating compared to highest power level.
- **Quick Start:** start straight away and select the desired cooking level.
- **Timer with switch-off function:** turns off the assigned cooking zone after the set time.

UPC code: 825225904700
 Color: Black
 Energy source: Electric
 Fuse protection: 40 A
 Volts: 208-240 V
 Frequency: 60 Hz
 Power Cord Length: 37"
 Plug Type: No Plug
 Required Cutout Size (HxWxD) (in): 4 1/8" x 34 7/8" x 20"
 Minimum distance from counter front (in): 2 1/4"
 Minimum distance from rear wall (in): 2"
 Overall appliance dimensions (HxWxD) (in): 5/16"+4 1/8" x 37" x 21 1/4"
 Product Packaging Dimensions (HxWxD): 7 1/16" x 42 1/8" x 26 5/8"
 Net Weight: 49.000 lbs
 Gross Weight: 60.000 lbs
 Total Number of Heating Elements: 5



4 242002 749983

**Series 6, Induction Cooktop, 36",
Black, Without Frame
NIT8666UC**

**The 800 Induction Cooktop is Sleek in
Design, and Features AutoChef®
Technology Which Maintains Precise
Cooking Temperatures.**

Design


- Also Available with Stainless Steel Frame: NIT8666SUC

Efficiency


Convenience

- Each Element has an independent Countdown Timer
- PreciseSelect® - Direct Cooking Level Selection (17 Settings)
- Improved Installation Flexibility: Only 36" Induction Cooktop in its Class that Requires a 40amp Breaker
- ChildLock - Prevents the Cooktop from Being Accidentally Switched On, Locks Temperature Settings if in Use
- SafeStart - Ensures that Element is Only Activated, if Suitable Cookware is in Position; no Activation When Other Metal Objects are Placed on Element

Series 6, Induction Cooktop, 36", Black, Without Frame NIT8666UC

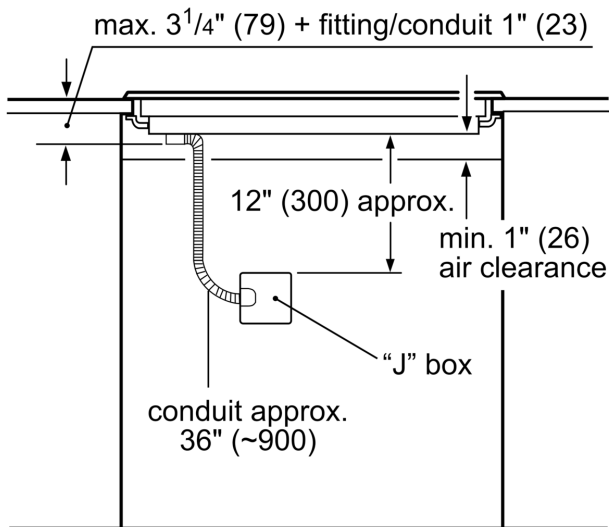


Measurements in inches (mm)

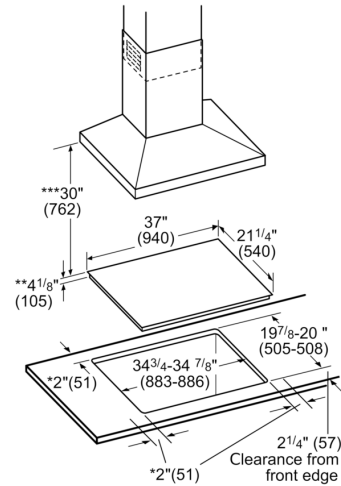

- * Minimum clearance from the cooktop cutout to the wall
- ** Installed depth includes a gap of 1" (26 mm) for ventilation
- *** Minimum clearance between the cooktop surface and lower edge of the exhaust hood.

measurements in inches (mm)

30" Built-in oven - under induction cooktop

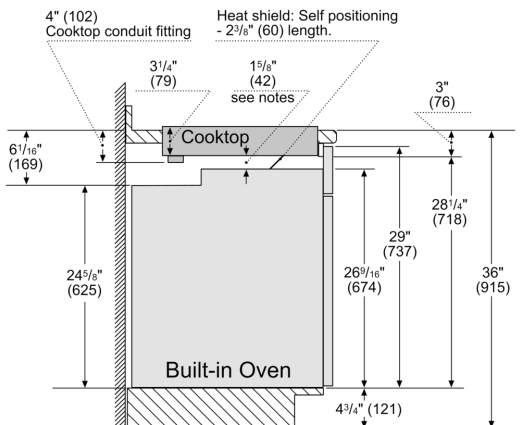

Notes:

Dimensions based on standard countertop height (36" with 4 3/4" toe kick including base plate).

The built-in oven can be installed below the induction cooktop as long as there is a minimum 1" (26) clearance between the bottom of the cooktop and the top of the oven.

measurements in inches (mm)