

## PUR 88 W

### 30-inch wall-mounted ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design – stainless steel canopy 29 1/2 (748) in (mm) wide
- Powerful – 512.06 (870) ft<sup>3</sup>/min (m<sup>3</sup>/h) in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating

EAN: 4002515941638 / Material number: 10743170 /  
Old Material Number: 28428654USA

<b>General information</b>	
Model number	PUR 88 W
Manufacturer material number	10743170
EAN number	4002515941638
Marketing class	Silver
<b>Design</b>	
Wall ventilation hood	•
<b>Construction type and design</b>	
Color	Stainless steel
<b>Operating modes</b>	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF12-900
<b>User convenience</b>	
Electronic controls	•
Operation	Light-touch switches with LEDs
Power levels (number excl. Intensive)	3
Booster levels	1
CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
<b>Lighting</b>	
Number x W	2 x 3 W
Light intensity in Lx	330 lx
Color temperature in K	3000 Kelvin
<b>Blower</b>	
Dual-action blower	•
<b>Exhaust air</b>	
Air throughput in CFM in Booster	510
Air throughput with Booster level 1 (m <sup>3</sup> /h) according to EN 61591	512.06 (870)
<b>Safety</b>	
Safety shut-off	•
<b>Technical data</b>	
Canopy width in in.(mm)	29 1/2 (748)
Overall hood height for vented mode and external in inches (mm)	27 (685)–39 5/8 (1005)
Overall height for recirculation mode ventilation hoods in mm	32 1/8 (815)–44 3/4 (1135)
Overall min. height for vented and external in in. (mm)	27 (685)
Overall max. height for vented and external in in. (mm)	39 5/8 (1005)
Canopy height in in.(mm)	2 1/2 (62)
Overall min. height for recirculation in in. (mm)	32 1/8 (815)
Canopy depth in in.(mm)	19 3/4 (500)
Overall max. height for recirculation in in. (mm)	44 3/4 (1135)
Net weight in lbs. (kg)	51 (23.0)
Length of electrical wire in ft (m)	4 (1.5)

PUR 88 W

30-inch wall-mounted ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.




EAN: 4002515941638 / Material number: 10743170 /  
Old Material Number: 28428654USA

Standard plug fitted	•
Minimum height above electric cooktops in mm	24 1/8 (610)
Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Plug type	NEMA plug: 5-15
Number of phases	1
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Frequency in Hz	60
<b>Installation note</b>	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
<b>Standard accessories</b>	
Non-return flap	•
Reducer from 150 to 125 mm Ø	•

## PUR 88 W

30-inch wall-mounted ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

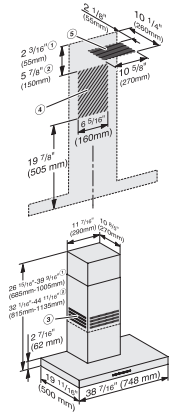

PUR88W, DAP1727 (Installation drawing) – USA/CDN

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)