

PUR 98 W

Wall ventilation hood

with EasySwitch light-touch switches for convenient operation and LED lighting



- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating

EAN: 4002515941256 / Material number: 10743150 / Old Material Number: 28419854USA

Construction type	
Wall ventilation hood	•
Operating modes	
Recirculated mode	Convertible
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF 12-P
Design	
Color	Stainless steel
RAL colours possible as special order	•
Customization possible on request	•
Variable height available as special order	•
Variable width available as special order	•
Control panel	
Electronic controls	•
Power levels (number excl. Intensive)	3
Programmable Intensive switch-off	•
Cleaning convenience	
Easy-to-clean CleanCover hood liner	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	3
Lighting	
LED	•
Number x W	3 x 3 W
Light intensity in Lx	450 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Extraction	
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Overall hood height for vented mode and external in inches (mm)	27 (685)–39 5/8 (1005)
Overall hood height for recirculation and external in inches (mm)	32 1/8 (815)–44 3/4 (1135)
Canopy width in in.(mm)	35 3/8 (898)
Overall min. height for vented and external in in. (mm)	27 (685)
Overall max. height for vented and external in in. (mm)	39 5/8 (1005)
Canopy height in in.(mm)	2 1/2 (62)
Overall min. height for recirculation in in. (mm)	32 1/8 (815)
Canopy depth in in.(mm)	19 3/4 (500)
Overall max. height for recirculation in in. (mm)	44 3/4 (1135)
Minimum height above electric hobs in mm	24 1/8 (610)
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	56 (25.0)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Total connected load in kW	0.35

PUR 98 W

Wall ventilation hood

with EasySwitch light-touch switches for convenient operation and LED lighting




EAN: 4002515941256 / Material number: 10743150 / Old Material Number: 28419854USA

Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation notes	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Accessories supplied	
Non-return flap	•
Optional accessories	
OdorFree charcoal filter	DKF 12-900

PUR 98 W

Wall ventilation hood

with EasySwitch light-touch switches for convenient operation and LED lighting

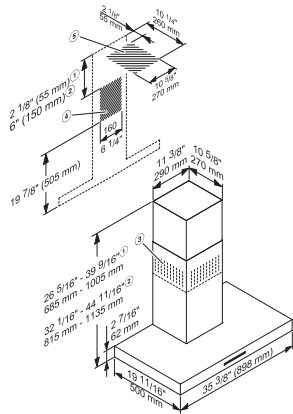

PUR 98 W (Installation drawing) – USA/CDN

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)