

Job Name: _____

Purchaser: _____

Submitted To: _____

Construction: _____

Reference: _____

Approval: _____

Date: _____

Submitted By: _____

Unit: _____

Drawing #: _____

QS24WP2BEA



Indoor Accessories


Remote Controller (Included)	WJ26X35394
Wired Controller	QACT17B
Refrigerant Detection Sensor (RDS)	UALS01A

Specifications

Cooling	Rated Cooling Capacity Btu/hr	24,000
Heating	Rated Heating Capacity Btu/hr	25,000
Power	Voltage, Cycle, Phase V/Hz/Phase	208-230/60/1
	Operating Voltage Range	187-253 VAC
Indoor Unit	Fan Speed Stages	5 + Auto
	Airflow CFM: Cooling (Turbo/High/Med/Low/Quiet)	800/730/630/535/440
	Motor Speed RPM: Cooling (Turbo/High/Med/Low/Quiet)	1300/1200/1050/900/750
	Indoor Sound Level dB: Cooling (Turbo/High/Med/Low/Quiet)	54/50/47/44/38
	Airflow CFM: Heating (Turbo/High/Med/Low/Quiet)	800/730/630/535/440
	Motor Speed RPM: Heating (Turbo/High/Med/Low/Quiet)	1300/1200/1050/900/750
	Indoor Sound Level dB: Heating (Turbo/High/Med/Low/Quiet)	54/50/47/44/38
	Auto Up-Down Louver	Yes
	Auto Left-Right Louver	Yes
	Dimension: H x W x D in (mm)	13 1/2 x 44 3/8 x 9 1/8 (343 x 1126 x 232)
	Weight (Net/Ship)- lbs (kg)	34.86/43.03 (15.8/19.5)
	Drain Pipe Size O.D in	5/8
	WiFi*	Built-in
Refrigerant Line	Factory-Installed Refrigerant Detection Sensor (RDS)	No
	Refrigerant Detection Sensor (RDS) Compatible	Yes
	Liquid O.D. in	1/4
	Suction O.D. in	1/2

*WiFi includes SmartHQ™ Home and SmartHQ™ Service compatibility.

QS24WP2BEA

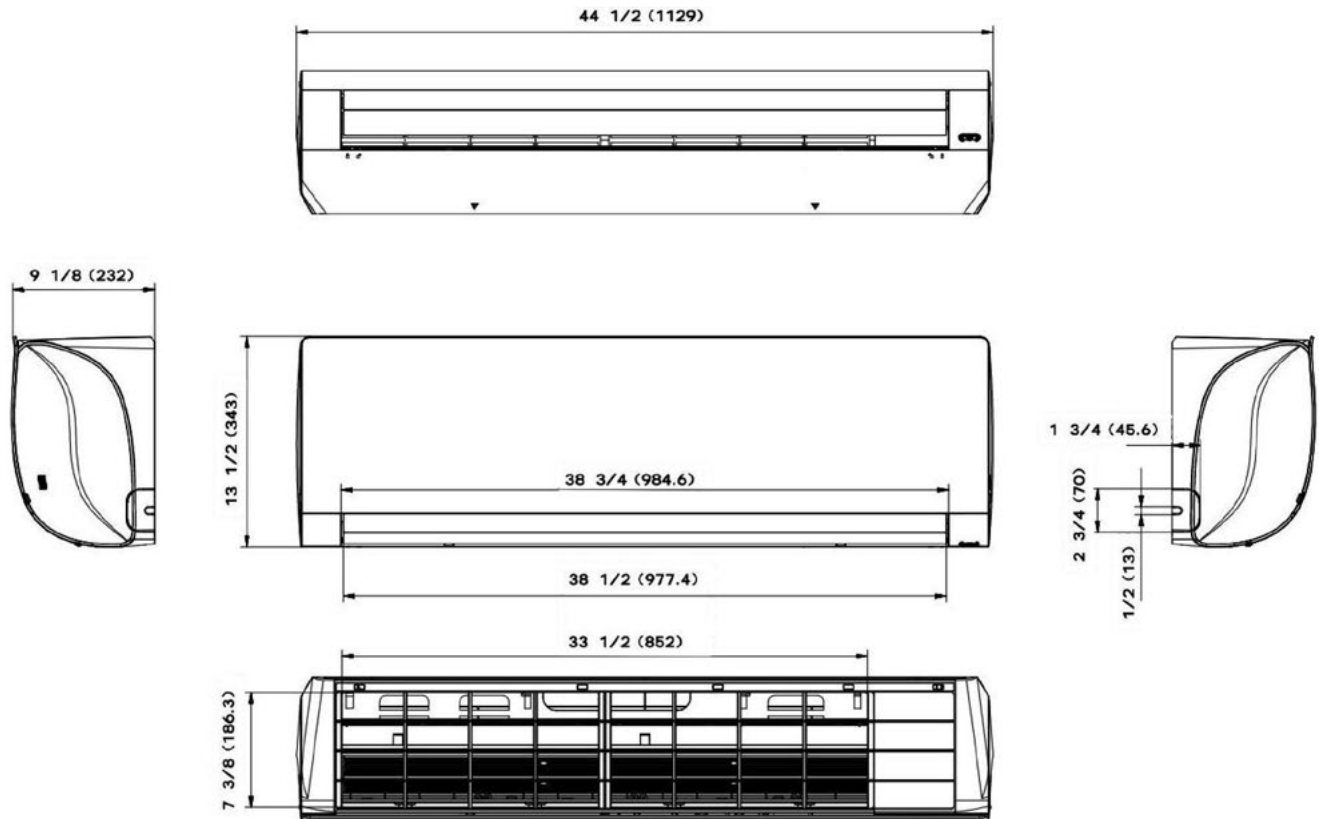

Note: Dimensions are shown in inches (millimeters)

SUBMITTAL REVISION HISTORY

03-31-25: Submittal release.**04-21-25:** Updates: heating & cooling CFM; heating & cooling RPM; cooling sound level; dimensions.