


# SEU122B



Product family	Cooktop
Installation	Ultra-low profile
Dimensions	12"
Power supply	Electric
Type	Ceramic
EAN code	8017709240929



## Aesthetic



Aesthetics	Universal
Color	Black
Finishing	Glass
Material	Glass
Glass	Ceramic
Glass edge	Beveled
Control setting type	Touch controls
Controls position	Front
Silkscreen color	Gray

## Technical Features



Front-center - Ceramic - single - 1.00 kW - Ø 14.8 cm  
 Rear-center - Ceramic - single - 1.40 kW - Ø 18.4 cm


Automatic switch-off in case of over-heating	Yes	Residual heat indicator	Yes
Automatic switch-off in case of overflow	Yes		

## Electrical Connection

Nominal power	2400 W	Type of electric cable supplied	Yes, Single phase
Current	22 A	Frequency	60 Hz

---

Voltage	120 V	Power cord length	47 1/4 "
Electric cable type	Single phase	Terminal box	3 poles

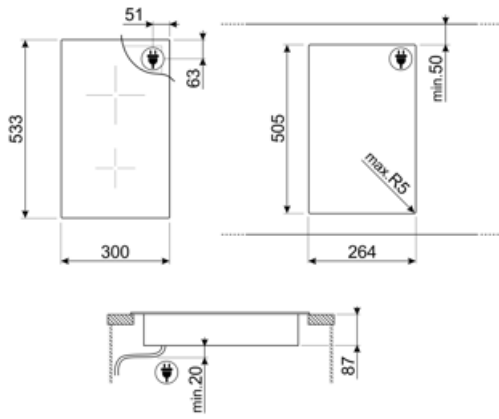

---

## Not included accessories

---










### SCRP

Induction and ceramic hobs and teppanyaki scraper

---

## Symbols glossary (TT)

---

- |  |   |   |   |
|--|---|---|---|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary.                     |  | Ultra-low profile: Installation of product with flat edge - height of 1 mm.   |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.  |
|  | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.       |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Touch control   |   |   |