



# SEU304EMTB



Product family	Cooktop
Installation	Ultra-low profile
Dimensions	30"
Power supply	Electric
Type	Ceramic
EAN code	8017709240981

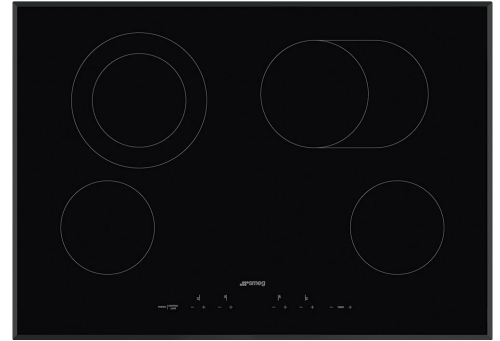

## Aesthetic



Color	Black
Finishing	Glass
Material	Glass
Glass	Ceramic
Glass edge	Beveled
Control setting type	Touch controls
Controls position	Front
Silkscreen color	Gray

## Options



End cooking timer	1	Showroom mode	Yes
End-of-cooking acoustic alarm	Yes	Child safety lock	Yes
Limited power consumption option	Yes	Quick start	Yes
Limited Power Consumption Mode in W	4000 W		

## Technical Features



Front-left - Ceramic - single - 1.20 kW - Ø 14.8 cm  
 Rear-left - Ceramic - double - 1.00 - 1.00 kW - Ø 14.8 - Ø 21.4 cm

Rear-right - Ceramic - Flexible - 1.60 - 2.40 kW - Ø 17.0 - 26.5x17.0 cm

Front-right - Ceramic - single - 1.20 kW - Ø 14.8 cm


Automatic switch-off in case of over-heating Yes

Residual heat indicator Yes

Automatic switch-off in case of overflow Yes

## Electrical Connection

Nominal power	6800 W	Electric cable type	Single phase
Current	20 A	Frequency	60 Hz
Voltage	240 V	Power cord length	47 1/4 "
Voltage 2 (V)	208 V	Terminal box	6 poles

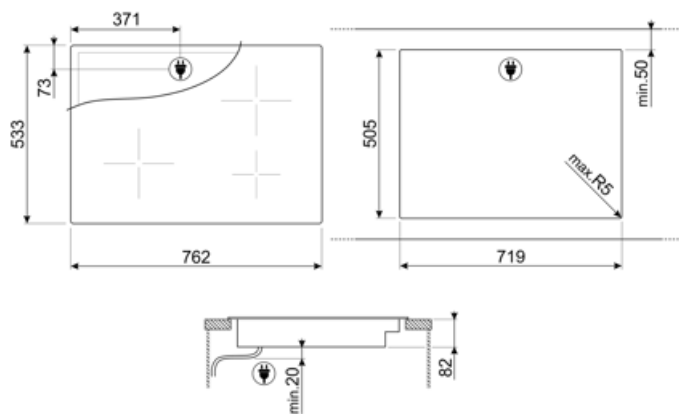

---

## Not included accessories












---



### SCRP

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary (TT)

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	Touch control		