

SIMU315D



Product family
Installation
Dimensions
Power supply
Type
EAN code

Cooktop
Proud or flush mounted
15"
Electric
Induction
8017709344061



Aesthetic



Aesthetics
Color
Finishing
Material
Glass
Glass edge
Control setting type
Slider
Slider
Controls position
Silkscreen color

Universal
Black
Glass
Glass
Eclipse ceramic
Straight edge
Touch control - Backlit white
Yes
White
Front
Gray

Program / Functions



Cooking zones 2
Time-setting options Automatic switch-off
Cooking zones with Booster 2
No. of Flexible zones 2
Main on/off switch Yes
Power levels 9
Cooking zones 2

Options

	Multi-zone	Yes		End-of-cooking acoustic alarm	Yes
	Flexible zone	MultiZone		Residual time indicator	Yes
	Multi-zone	Yes		Limited power consumption option	Yes
	Multi-zone	Yes		Limited Power Consumption Mode in W	2400 a 7400 - step 100 W
	Keep-warm automatic function	Yes		Showroom mode	Yes
	Grill function	Yes		Child safety lock	Yes
	End cooking timer	4		Twin-zone option	Yes
	Pause option	Yes		Quick start	Yes
	Minute minder	1		Quick level selection	Yes

Technical Features



Front-center - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3000 kW - 22x18 cm

Rear-center - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3000 kW - 22x18 cm

38.5x23.0 cm

Multizone center - Booster 3700 kW

38.5x23.0 cm

Automatic pan diameter adjustment Yes

Automatic switch-off in case of overflow Yes

Automatic pot detection 3.5" minimum

Residual heat indicator Yes


Permanent Automatic Pot Detection with indication of the relative control

Protection from accidental start Yes

Automatic switch-off in case of over-heating Yes

Electrical Connection

Nominal power	3700 W	Electric cable type	Single phase
Current	16 A	Frequency	60 Hz
Voltage	240 V	Power cord length	47 1/4 "
Voltage 2 (V)	208 V	Terminal box	5 poles

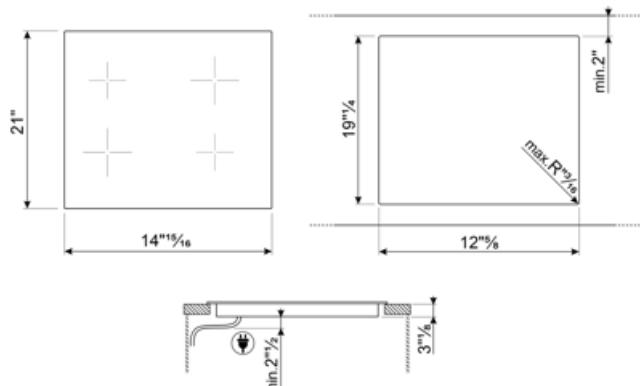

Compatible Accessories



SCRP

Induction and ceramic hobs and
teppanyaki scraper



TPK

Stainless steel grill plate to cook
Teppanyaki dishes

Symbols glossary

	Automatic merge of zones for a bigger area		...
	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	Evolution Slider totally Back-lighted ghost effect		The slider control panel allows you to adjust the power simply by passing your finger across the touch device.
	Additional maximum power level for a better energy consumption		Darkness becomes light
	ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.		Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.
	Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility		Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.
	PAUSE_72dpi		Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).
	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	TWIN_ZONE_72dpi		...
	...		