T361B902SP

36-INCH BUILT-IN 2-DOOR BOTTOM FREEZER

FREEDOM® COLLECTION, PANEL-READY







FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES	
Refrigerator	36°F (2°C) to 46°F (8°C)
SuperCool	36°F (2°C) for approximately 6 hours
Energy Saving (Economy) Mode	Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C)
Freezer	-11°F (-24°C) to 7°F (-14°C)
SuperFreeze®	-22°F (-30°C) for approximately 52 hours

GENERAL PROPERTIES		
Panel Ready	Yes	
Reversible Door Swing	Yes	
SoftClose® Door	Yes*	
SoftClose® Drawers	Yes	
Carbon Air Filter	Yes	
Lighting	LED Sidewall and Theater Lighting	
Refrigerator Shelves	3	
Adjustable Shelves – Refrigerator	2	
Shelf Material	Glass w/Aluminum Profile	
Full Extension Drawers @ 115° Door Opening Angle	Yes	
Full Extension Drawers @ 90° Door Opening Angle	Yes	
Adjustable Temperature Drawer	1	
Humidity Managed Drawer	1	
Door Bins – Refrigerator	2	
Gallon Door Bins – Refrigerator	1	
Defrost Process – Freezer	Frost-Free	
Freezer Baskets	2	
Ice Maker with Diamond Ice System	Yes	
Door Open Alarms	Yes	
Open Door Assist	Yes	
SuperCool	Yes	
SuperFreeze®	Yes	
Special Modes	Sabbath, Economy, Vacation	
CAPACITY		
Total Capacity (cu. ft.)	19.6 cu. ft.	
Refrigerator Capacity (cu. ft.)	14.0 cu. ft.	
Freezer Capacity (cu. ft.)	5.6 cu. ft.	
TECHNICAL DETAILS		
Watts (W)	350 W	
Current (A)	15 A	
Volts (V)	110-120 V	
Frequency (Hz)	60 Hz	
Power Cord Length (in.)	118	
Plug Type	120V-3 Prong	
DIMENSIONS & WEIGHT		
Appliance Dimensions (H x W x D) (in.)	83 ³ / ₄ "** x 35 ³ / ₄ " x 24"	
Required Cutout Size (H x W x D) (in.)	84" x 36" x 25"	
Net / Gross Weight (lbs)	456 / 499 lbs	
EFFICIENCY		
ENERGY STAR® Qualified	Yes	
Annual Energy Consumption	531 kWh	
*To verify if you have a refrigeration unit with Soft-Close capability please contact our customer		

^{*}To verify if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328

Page 1 of 3 3 / 20

team by calling 1-800-735-4328. **Height adjustable + / -1/2" (+ / -13 mm)

36-INCH BUILT-IN 2-DOOR BOTTOM FREEZER






WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

^{*}Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

CUTOUT DIMENSIONS




Furniture return

A: Area for installation of power connection.


B: Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced in areas A and B.

C: Recess depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel.

Stainless steel models contain a panel-ready base unit, ready-to-install stainless steel door(s) with a right or left door swing and handle(s).




TOP VIEW CLEARANCE



** Door handle must be added to this dimension

 Depends on the thickness of the furniture door.
3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).



Page 2 of 3 3 / 20


T361B902SP

36-INCH BUILT-IN 2-DOOR BOTTOM FREEZER

FREEDOM® COLLECTION, PANEL-READY



PRODUCT AND PANEL DIMENSIONS

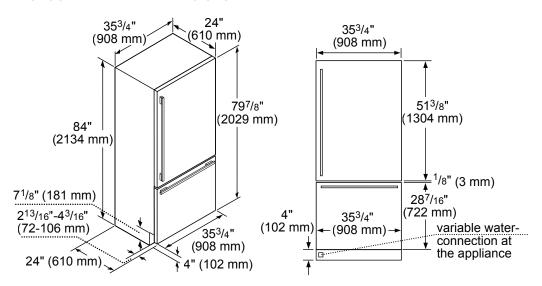

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS

36-Inch 2-Door Flat Stainless Steel Door Panel



TFL36IB800 For use with Handle TFL36IB905* Handleless

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

HANDLES

Choose between two options:

PR36HNDL20 (Qty. 2) 36-Inch Professional Series Handle

or

MS36HNDL20 (Qty. 2) 36-Inch Masterpiece® Series Handle

STORAGE



36HFGALBIN 36-Inch Half Gallon Bin



LPRODBIN10 Large Produce Bin



SPRODBIN10 Small Produce Bin



36PRODRAIL 36-Inch Produce Railing

Heater Kit Required

HEATRKIT20 - 13W @ 120V

Freedom® Heater Kit When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

FILTERS



REPLFLTR10

Freedom® Water Filter Replacement water filter for use in all freezer and bottom freezer models



SCRNFLTR10

By-Pass Filter for use with existing in-home water filtration systems in all freezers and bottom freezer models

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 3 of 3 3 / 20

^{*}Available Summer 2019