



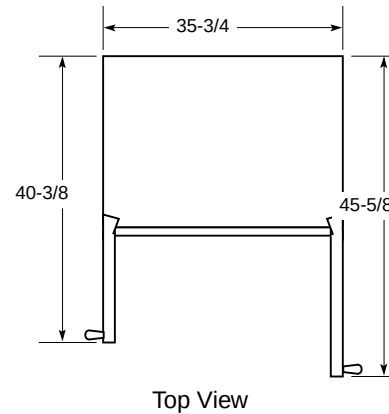


Profile™

TPX24SIYBS—GE Profile™ “Built-In-Style” Side-by-Side Refrigerator

Case Dimensions (in inches/cm.)

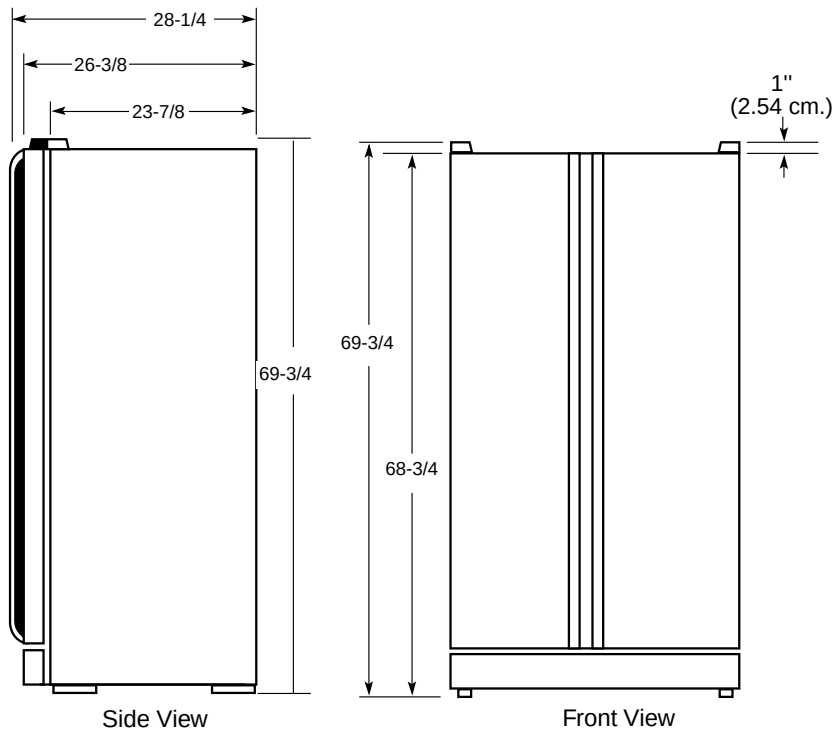

Installation of Water and Electrical Outlets

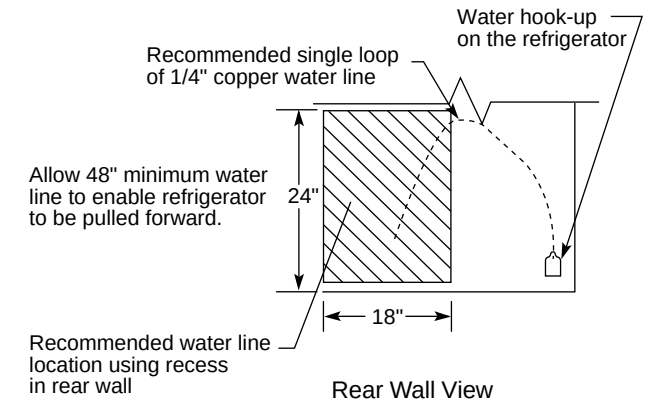

For answers to your Monogram®, GE Profile Performance Series™, GE Profile™, GE, Hotpoint and RCA appliance questions, call GE Answer Center® service, 800.626.2000.



Total volume and shelf area are calculated by the Association of Home Appliance Manufacturers' standards.



Listed by Underwriters Laboratories




EnergySmart



TPX24SIYBS—GE Profile™ “Built-In-Style” Side-by-Side Refrigerator


Rough-In Dimensions (in inches)

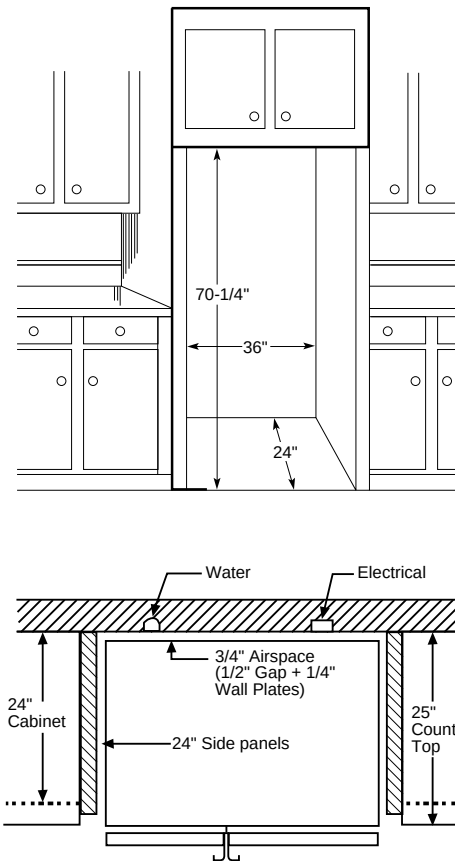


Standard, New Construction and Replacement Installation Installation Tips to Maximize the Built-In Look

- All wall/floor moulding should be removed prior to installation.
- Water recess on rear wall recommended to prevent water line damage. 48" minimum length 1/4" diameter water line tubing recommended.
- When possible, recess both water line and electrical outlet. (See local codes)
- Front and rear leveling legs are adjustable for the “Built-In” look. (See owner’s manual)
- If optional collar trim kit is to be used or anticipated, see collar trim installation on next page for different rough-in dimensions.

Door Panel Dimensions (in inches)

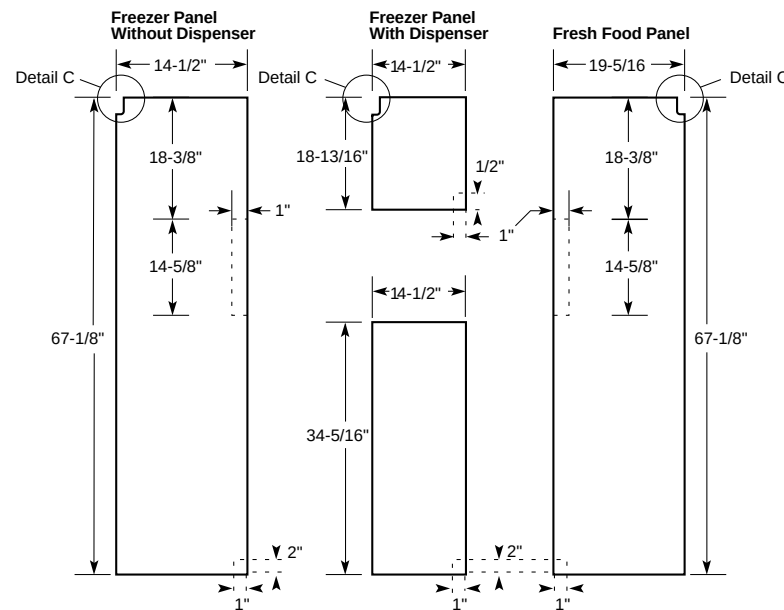

The areas at the top of the panels need to be cut out of the panels. All other dotted lines indicate areas that must be routed out about 3/16" (5 mm) on the back of side panels 1/4" (6 mm) thick or more. For panels less than 1/4" (6 mm) thick, these areas can be cut out of the filler panel.

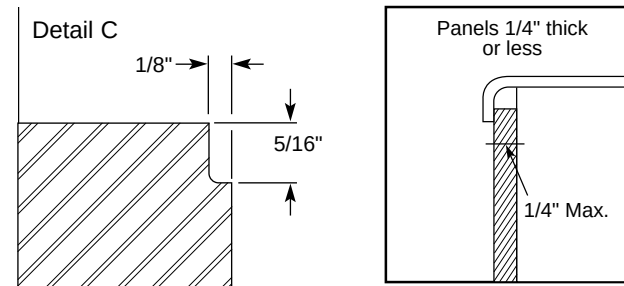

Order your own custom wood panels to match cabinetry or other decor.


- Fresh food compartment panels (19-5/16" wide x 67-1/8" high)
- Freezer panel with dispenser (14-1/2" wide x 18-13/16" high and 14-1/2" wide x 34-5/16" high)
- Freezer panel without dispenser (14-1/2" wide x 67-1/8" high)

Panels up to 1/4" thick will fit door frame with no special preparation.

- Add filler behind material thinner than 1/4" for proper fit.

Note: Panels up to 3/4" will require special routing area around handles. Dimensions may vary depending on depth of panel.

Example of Routing






(Fresh Food panel shown)
Notch required at top corner as noted.



Profile™

TPX24SIYBS—GE Profile™ “Built-In-Style” Side-by-Side Refrigerator


Collar Trim Installation

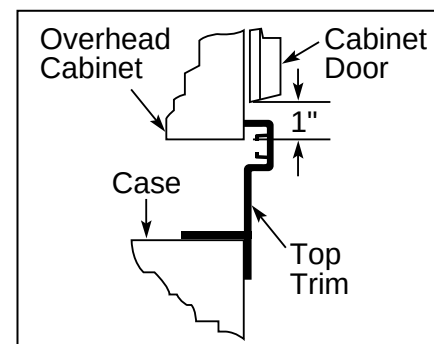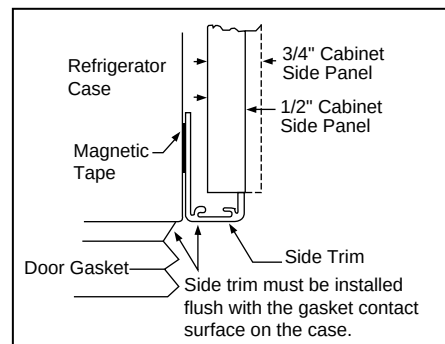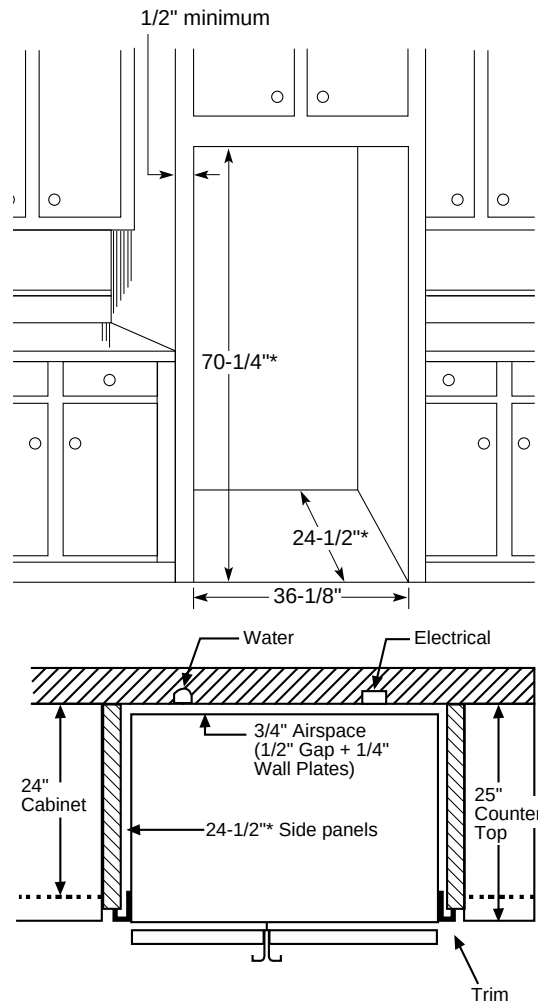

Collar Trim Installation

An enclosure is required to match up to the trim, see Typical Installation. To obtain the most integrated look, the cabinet or soffit above the refrigerator should extend out to the same depth as the side panels. The refrigerator opening must have minimum dimensions of 70-1/4" high x 36-1/8" wide x 24-1/4"* deep as shown at right. If there is an overhead cabinet, allow 1" for cabinet door clearance with the top trim piece so the cabinet doors can be opened without hitting the top trim. If 1/2" side panels are used, then side trim and panel will be even. If 3/4" side panels are used, then some of the side panel will extend beyond the trim and must be finished.

*24-1/4" depth applies only to the refrigerator opening, not the actual cabinet depth.

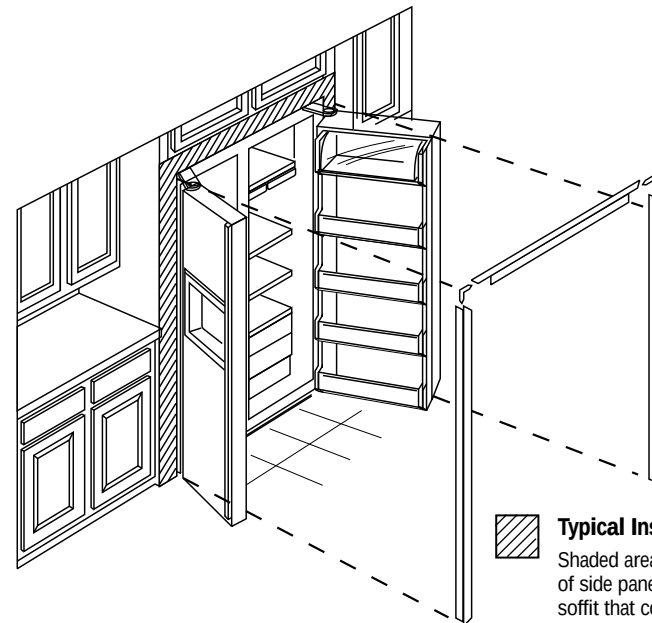


Typical Installation
Shaded areas represent front surfaces of side panels and overhead cabinet or soffit that contacts trim.



Profile™

TPX24SIYBS—GE Profile™ “Built-In-Style” Side-by-Side Refrigerator

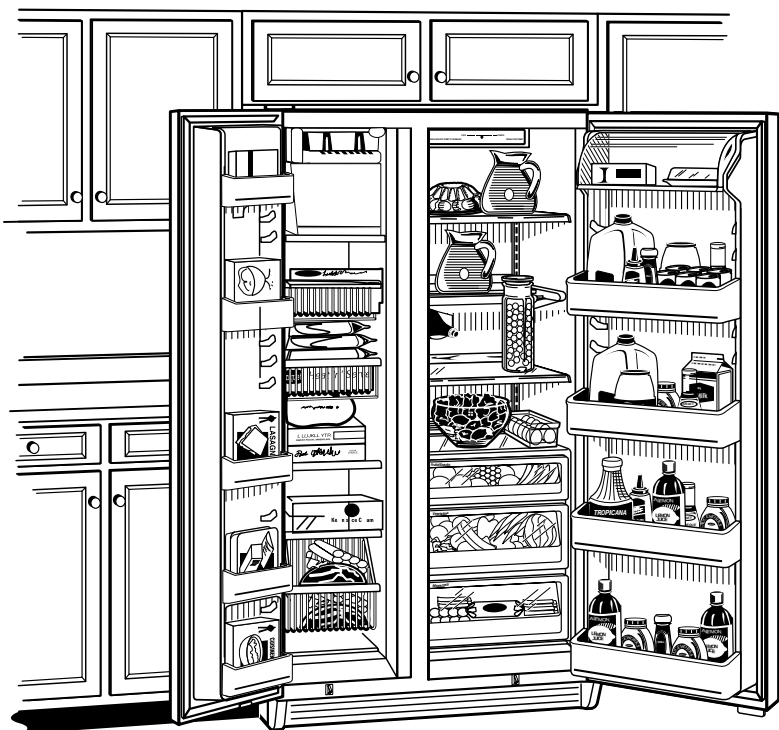

Features and Benefits

- Contemporary Model
- 23.7 cu. ft. Capacity
- Smart Storage System
- Clear Crispers With Limited Lifetime Warranty
- QuietSound Noise Reduction Package
- Automatic/Factory-Installed Icemaker
- 3 Adjustable Glass Fresh Food Cabinet Shelves (2 Slide Out, Spill Proof)
- Quick Space™ Shelf
- Adjustable Humidity Snack Pack
- 4 Fresh Food Door Shelves (2 Adjustable With Gallon Storage)
- Beverage Rack
- Wire Everwhite, Slide-Out Freezer Baskets
- Handles With Stainless Steel Appearance
- Factory-Installed Stainless Steel Panels
- Model TPX24SIYBS—Stainless Steel