

2260WC • 60 cm Wine Cellar • 2000 Series

FEATURES & BENEFITS



INTEGRATED FRAME



INTEGRATED SOLID



INTEGRATED FRAME
(STAINLESS
HANDLELESS PANEL)*



INTEGRATED SOLID
(STAINLESS
HANDLELESS PANEL)*

PERFORMANCE

- Volume of 139 litres holds up to 43 wine bottles (0,75 L)
- Digital Touch Pad Control is conveniently located on upper face of unit
- Temperature range: 3°C - 18°C
- Convection cooling system rapidly and efficiently takes items to the set temperature
- Rubber mounted compressor virtually eliminates vibration

INTERIOR/EXTERIOR

- Black interior is illuminated with LED lighting that automatically turns off when the door is closed, or can be set to stay on for 3 hours
- Full extension black coated wine racks allow for easy access and prevent bottles from shifting
- Wine racks accommodate a variety of bottle shapes and sizes, while the fourth and fifth racks allow for larger diameter wine and champagne bottles
- LowE coated, argon gas filled triple thermopane glass door provides protection from harmful UV light
- The door swing is field reversible and is shipped right-hand hinged

INTEGRATION

- Robust, concealed and covered hinges with built-in door stop and closer
- Integrated model requires 20 mm custom door panel of your choice, or can accept U-Line Euro Style Handleless Panel Accessory (must be ordered separately)
- Fixed grille can accept an integrated plinth
- Four independently adjustable leveling legs provide a precise undercounter fit

MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-2260WCINT-00B	220-240 / 50	Field Reversible	Integrated Frame	72 kg
U-2260WCINT-60B	220-240 / 50	Field Reversible	Integrated Solid	69 kg

ACCESSORIES

Model	Description	Finish	Shipping Weight
ULASHP24FRAME*	Stainless Handleless Panel, 60 cm Frame	Stainless Frame	4 kg
ULASHP24SOLID*	Stainless Handleless Panel, 60 cm Solid	Stainless Solid	5 kg
U-POWERCORD-2056	Power Cord, 220-240v Great Britain/Ireland	Black	1 lb (0,5 kg)
U-POWERCORD-2667	Power Cord, 220-240v Continental Europe	Black	1 lb (0,5 kg)
U-POWERCORD-2256	Power Cord, 220-240v Australia/New Zealand	Black	1 lb (0,5 kg)
U-POWERCORD-3071	Power Cord, 220-240v China	Black	1 lb (0,5 kg)
U-POWERCORD-3111	Power Cord, 220-240v India	Black	1 lb (0,5 kg)



Power cord type must be specified with each U-Line order; no additional cost for power cord.

*Installs on integrated models.

2000 Series • 60 cm Wine Cellar • **2260WC**

NICHE / RECESS

Dimensions shown apply to Integrated (INT) models with a 20 mm integrated panel/frame installed (applies to U-Line's Euro Style Handleless Panel Accessory).

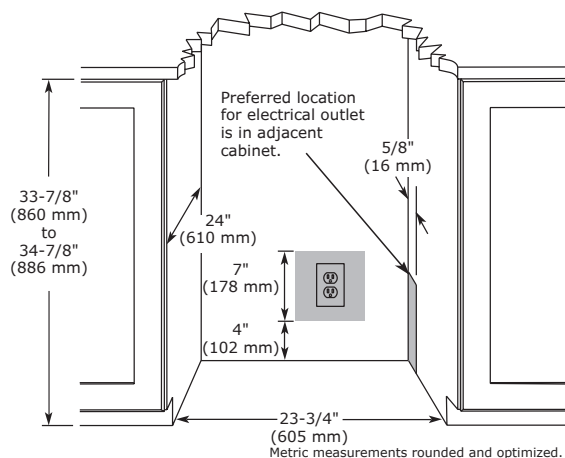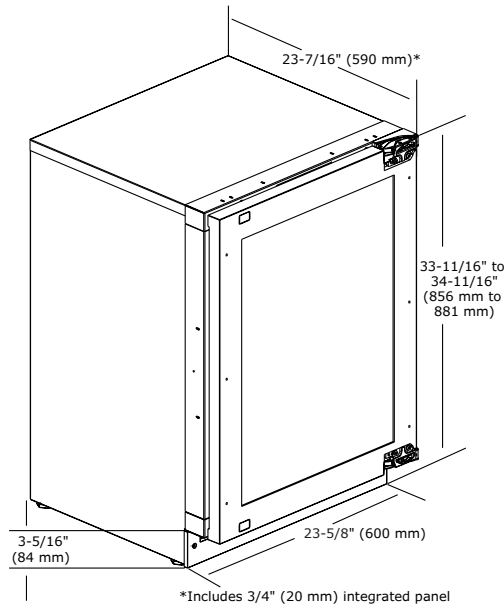

INSTALLATION NOTES

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

This appliance is intended to be used exclusively for the storage of wine.

*Must be installed in a climate controlled environment and operate within the temperatures designated in this product's user guide.

Please visit u-line.com to view this model's User Guide. All specifications are subject to change without notice.

PRODUCT FICHE

Model	2260WC
Category	2
Energy efficiency class on a scale of A+++ to G	A
Energy consumption in kWh per year	117 kWh
Total volume: fridge compartment (net)	N/A
Total volume: wine compartment (net)	139 L
Total volume: freezer compartment (net)	N/A
Frost-free compartment	Yes
Temperature rise time in event of blackout (hrs)	N/A
Climate class	T or ST
Noise emissions	46 dBA
Dimensions: width	600 mm
Dimensions: depth	590 mm
Dimensions: height	856 mm
Net weight: solid door	64 kg
Net weight: glass door	67 kg
Panel type	70 mm Frame Panel or Solid Panel (-60 suffix)
Panel thickness	20 mm
Panel height	762 mm
Panel width	595 mm
Rated frequency	50 Hz
Rated voltage	220-240 v
Refrigerant charge	38 g
Foam blowing agent	HFO-1233zd

COOLING SYSTEM

