

3045CLR • 45 cm Clear Ice Machine • Modular 3000 Series

FEATURES & BENEFITS



INTEGRATED SOLID



INTEGRATED SOLID
(STAINLESS
HANDLELESS PANEL)*

PERFORMANCE

- Daily ice production of up to 27 kg of ice
- Up to 14 kg in ice storage capacity
- Clear ice cube dimensions: 22 mm W x 22 mm H x 22 mm L
- Clear ice cube fullness can be adjusted
- Silent mode temporarily suspends ice making for 3 hours
- U-Select® Control with digital OLED display
- Indicator alert notifies user when cleaning is needed
- Easy clean process only lasts 45 minutes

INTERIOR/EXTERIOR

- Black interior is illuminated with LED theatre lighting
- Clear heavy duty ice scoop included
- Drain required; factory installed drain line
- Model can be ordered with factory installed P60 drain pump if gravity drain is not accessible
- The door swing is field reversible and is shipped right-hand hinged

INTEGRATION

- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable grille/fascia can be shifted front-to-back and up-and-down
- Grille/fascia can accept a custom integrated plinthe
- Integrated model requires 20 mm custom door panel of your choice, or can accept U-Line Euro Style Handleless Panel Accessory (must be ordered separately)
- Four independently adjustable leveling legs

MODEL DETAILS

Model	Voltage/Hz	Door Swing	Pump	Finish	Shipping Weight
U-3045CLRINT-00B	220-240 / 50	Field Reversible	-	Integrated Solid	49 kg
U-3045CLRINT-40B	220-240 / 50	Field Reversible	Pump Included	Integrated Solid	52 kg

ACCESSORIES

Model	Description	Finish	Shipping Weight
ULASHP18SOLID*	Stainless Handleless Panel, 45 cm Solid	Stainless Solid	4 kg
80-54081-00	Clear Ice Machine Cleaner (1 box of 6 packets)	N/A	0,5 kg
80-54097-00	Drain Pump (220-240 v)	N/A	3 kg
80-54674-00	Braided Water Supply Line Kit	N/A	0,5 kg
U-POWERCORD-2056	Power Cord, 220-240v Great Britain/Ireland	Black	1 lb (0,5 kg)
U-POWERCORD-2667	Power Cord, 220-240v Continental Europe	Black	1 lb (0,5 kg)
U-POWERCORD-2256	Power Cord, 220-240v Australia/New Zealand	Black	1 lb (0,5 kg)
U-POWERCORD-3071	Power Cord, 220-240v China	Black	1 lb (0,5 kg)
U-POWERCORD-3111	Power Cord, 220-240v India	Black	1 lb (0,5 kg)


Power cord type must be specified with each U-Line order; no additional cost for power cord.

*Installs on integrated models.

Modular 3000 Series • 45 cm Clear Ice Machine • **3045CLR**

NICHE / RECESS

Dimensions shown apply to Integrated (INT) models with a 20 mm integrated panel/frame installed (applies to U-Line's Euro Style Handleless Panel Accessory).

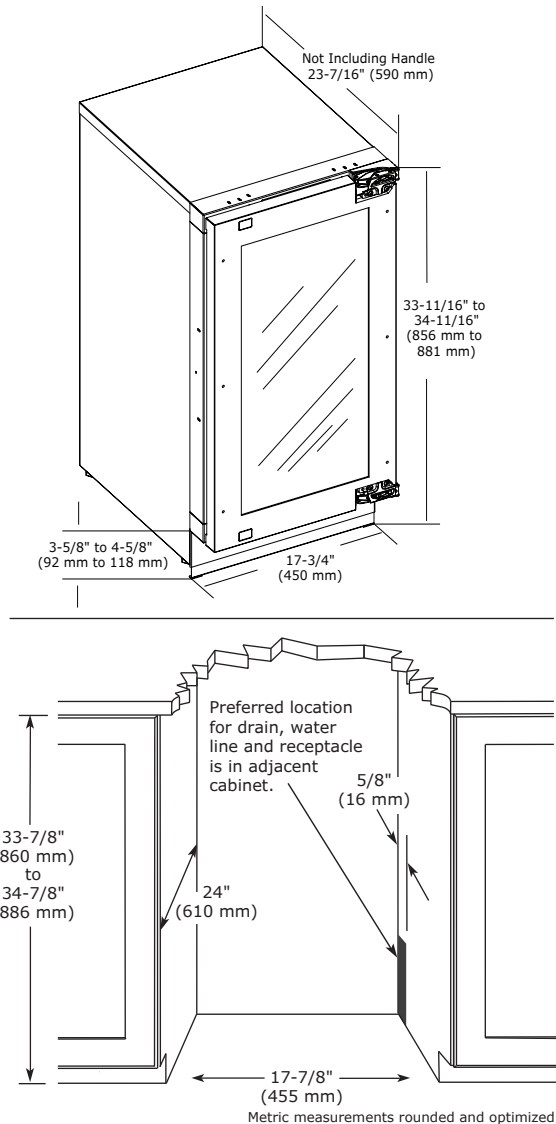

INSTALLATION NOTES

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille/fascia air flow.

For cabinet depths less than 620 mm, electrical socket must be located in the adjacent cabinet or recess in the wall. The power cord length is 180 cm.

PRODUCT FICHE

Model	3045CLR
Category	N/A
Energy efficiency class on a scale of A+++ to G	N/A
Energy consumption in kWh per year	N/A
Total volume: fridge compartment (net)	N/A
Total volume: wine compartment (net)	N/A
Total volume: freezer compartment (net)	N/A
Frost-free compartment	Yes
Temperature rise time in event of blackout (hrs)	N/A
Climate class	T or ST
Noise emissions	N/A
Dimensions: width	450 mm
Dimensions: depth	610 mm
Dimensions: height	856 mm
Net weight: solid door (with pump)	48 kg
Net weight: solid door (without pump)	45 kg
Panel type	Solid Panel
Panel thickness	20 mm
Panel height	762 mm
Panel width	445 mm
Rated frequency	50 Hz
Rated voltage	220-240 v
Refrigerant charge	149 g
Foam blowing agent	HFO-1233zd

- Water pressure requirement - 1,38 to 8,27 bar (20 to 120 PSI)
- Water flow requirement - water supply must be capable of maintaining 1,38 to 8,27 bar (20 to 120 PSI) for 1,5 minutes with a flow rate of 0,6 litres per minute. Recovery rate/interval at a maximum of every 12 minutes
- Water use - 1 litre of water for each harvest of ice. Recovery rate/interval at a maximum of every 12 minutes
- No additional clearance is needed for water pipe connection.
- A gravity drain may be used if the drain line has at least a 2 cm drop per 100 cm of run. If this requirement can not be met, a pump model must be ordered.

Please visit u-line.com to view this model's User Guide. All specifications are subject to change without notice.