

3060ZWC • 60 cm Independent Dual-Zone Wine Cellar • Modular 3000 Series

FEATURES & BENEFITS



INTEGRATED FRAME



INTEGRATED SOLID



INTEGRATED FRAME
(STAINLESS
HANDLELESS PANEL)*



INTEGRATED SOLID
(STAINLESS
HANDLELESS PANEL)*

PERFORMANCE

- Volume of 136 litres holds up to 43 wine bottles (0,75 L)
- U-Select® Control with digital OLED display
- Temperature range: 1°C - 18°C
- Independently controlled dual-zones
- U-Select® Control offers four distinct modes:
Drinks: 1°C - 18°C, Sparkling Wine: 3°C - 10°C,
White Wine: 7°C - 12°C, Red Wine: 12°C - 18°C
- Rubber mounted compressor virtually eliminates vibration

INTERIOR/EXTERIOR

- Black interior is illuminated with LED theatre lighting that automatically turns off when the door is closed, or can be set to stay on for 3, 6, or 24 hours
- Robust full-extension black coated wine racks allow for easy access and prevent bottles from shifting
- Wine racks accommodate a variety of bottle shapes and sizes; the third and sixth racks allow for larger diameter wine and champagne bottles
- LowE coated, argon gas filled triple thermopane glass door provides protection from harmful UV light
- The door swing is field reversible and is shipped right-hand hinged

INTEGRATION

- XcvbRobust, concealed and covered hinges with built-in door stop and closer
- Adjustable grille/fascia can be shifted front-to-back and up-and-down
- Grille/fascia can accept a custom integrated plinthe
- Integrated model requires 20 mm custom door panel of your choice, or can accept U-Line Euro Style Handleless Panel Accessory (must be ordered separately)
- Four independently adjustable leveling legs

MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-3060ZWCINT-00B	220-240 / 50	Field Reversible	Integrated Frame	72 kg
U-3060ZWCINT-60B	220-240 / 50	Field Reversible	Integrated Solid	69 kg

ACCESSORIES

Model	Description	Finish	Shipping Weight
ULASHP24FRAME*	Stainless Handleless Panel, 60 cm Frame	Stainless Frame	4 kg
ULASHP24SOLID*	Stainless Handleless Panel, 60 cm Solid	Stainless Solid	5 kg
U-POWERCORD-2056	Power Cord, 220-240v Great Britain/Ireland	Black	1 lb (0,5 kg)
U-POWERCORD-2667	Power Cord, 220-240v Continental Europe	Black	1 lb (0,5 kg)
U-POWERCORD-2256	Power Cord, 220-240v Australia/New Zealand	Black	1 lb (0,5 kg)
U-POWERCORD-3071	Power Cord, 220-240v China	Black	1 lb (0,5 kg)
U-POWERCORD-3111	Power Cord, 220-240v India	Black	1 lb (0,5 kg)



Power cord type must be specified with each U-Line order; no additional cost for power cord.

*Installs on integrated models.

Modular 3000 Series • 60 cm Independent Dual-Zone Wine Cellar • **3060ZWC**

NICHE / RECESS

Dimensions shown apply to Integrated (INT) models with a 20 mm integrated panel/frame installed (applies to U-Line's Euro Style Handleless Panel Accessory).

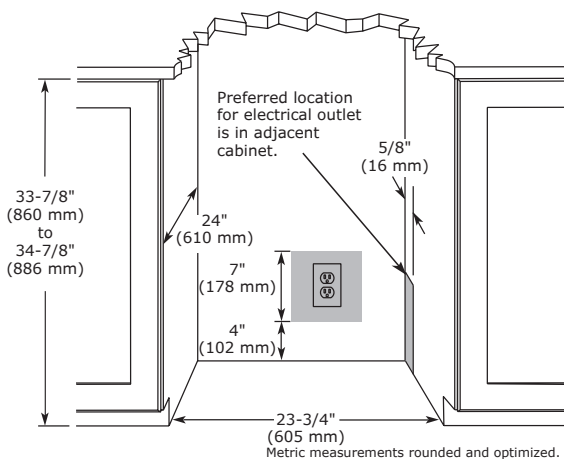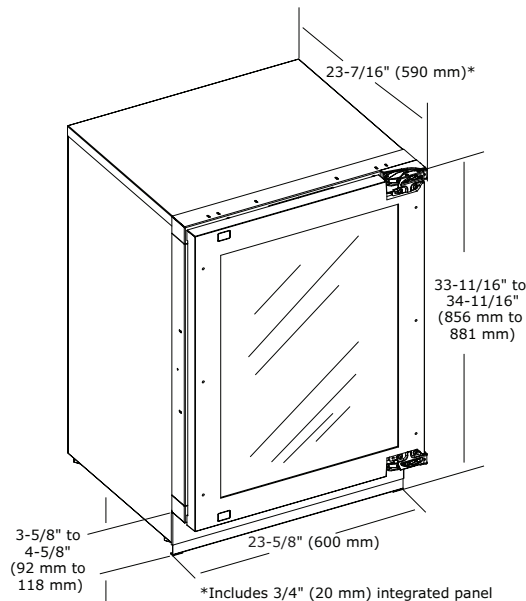

INSTALLATION NOTES

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille/fascia air flow.

*Must be installed in a climate controlled environment and operate within the temperatures designated in this product's User Guide.

This appliance is intended to be used exclusively for the storage of wine.

Please visit u-line.com to view this model's User Guide. All specifications are subject to change without notice.

PRODUCT FICHE

Model	3060ZWC
Category	2
Energy efficiency class on a scale of A+++ to G	A
Energy consumption in kWh per year	117 kWh
Total volume: fridge compartment (net)	N/A
Total volume: wine compartment (net)	136 L
Total volume: freezer compartment (net)	N/A
Frost-free compartment	Yes
Temperature rise time in event of blackout (hrs)	N/A
Climate class	T or ST
Noise emissions	46 dBA
Dimensions: width	600 mm
Dimensions: depth	590 mm
Dimensions: height	856 mm
Net weight: solid door	64 kg
Net weight: glass door	67 kg
Panel type	70 mm Frame Panel or Solid Panel (-60 suffix)
Panel thickness	20 mm
Panel height	762 mm
Panel width	595 mm
Rated frequency	50 Hz
Rated voltage	220-240 v
Refrigerant charge	38 g
Foam blowing agent	HFO-1233zd

COOLING SYSTEM

