SUB·ZERO

UC-15IP

FEATURES

Accepts custom panels for an integrated look within cabinetry or stainless-steel accessory panels and handles to match other Sub-Zero, Wolf, and Cove products*

Pump allows for more flexible install. Unit does not need to be immediately next to drain, a hose can be run and the pump assists the water removal in those situations

Produces up to 50 pounds of octagonal-shaped ice per day; stores 25 pounds at a time

Locks in cold air to ensure freshness with magnetic door seals

Set the two, four, and eight-hour delay to temporarily stop ice production, or pause ice production at the same time every day with auto-delay

Holds built-in ice scoop neatly in the door so it is there when you need it

ACCESSORIES

15" to 18" Filler

Cleaner For Undercounter Ice Maker

Pro Handle

Sanitizer For Undercounter Ice Maker

Stainless Steel Kickplate

Tubular Handle

15" Stainless Steel Door Panel - Pro Handle

15" Stainless Steel Door Panel - Tubular Handle

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.

HANDLE ACCESSORIES

PRO

TUBULAR
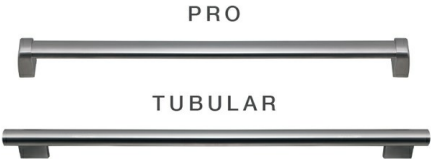
PRODUCT DETAILS

FREEZER

- LED lighting

- Built-in ice scoop

PRODUCT SPECIFICATIONS

Model	UC-15IP
Dimensions	14 3/4"W x 33 5/8"H x 23"D
Weight	115 lbs
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	20–80 psi

ELECTRICAL

LOCATE ELECTRICAL SUPPLY IN ADJACENT CABINET

E   E

PLUMBING

8" (203)

1/2" (13)

LOCATION OF WATER LINE

TOP VIEW

ICE MAKER DRAIN Ice maker models can be ordered with or without a drain pump. Models without a pump will drain water by gravity. A drain must be provided for all models.
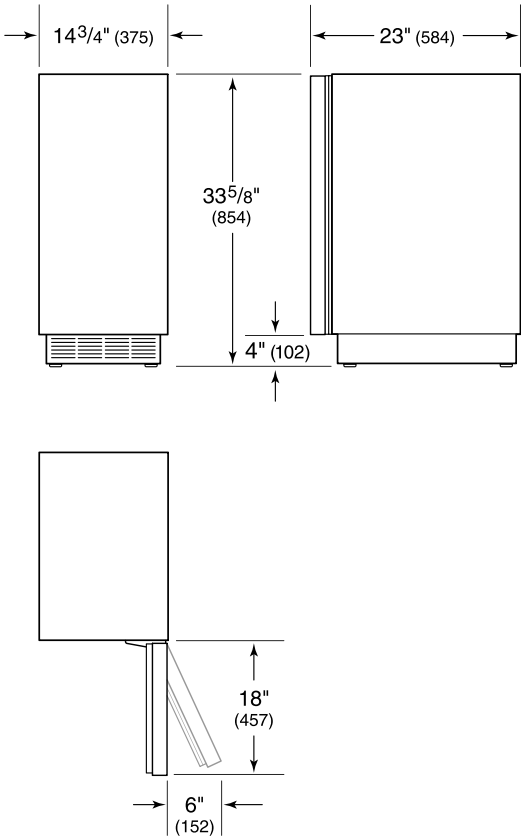
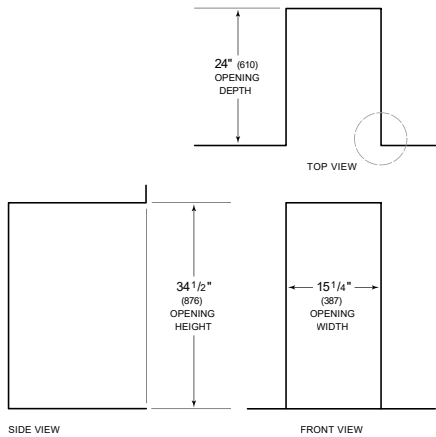**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

14 3/4" (375)   23" (584)

33 5/8" (854)

4" (102)

18" (457)

6" (152)

STANDARD INSTALLATION

24" (610) OPENING DEPTH

TOP VIEW

34 1/2" (876) OPENING HEIGHT

15 1/4" (387) OPENING WIDTH

SIDE VIEW

FRONT VIEW

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabin

3/4" (19) TYPICAL

3 1/2" (89) FINISHED RETURN

15 1/4" (387)

FRAMELESS CABINETRY

3/4" (19) TYPICAL

3 1/2" (89) FINISHED RETURN

FILLER

15 1/4" (387)

FRAMED CABINETRY